

"FH3 / FH4" Digital Temperature Gauge for Retort Applications

Introduction

The Anderson-Negele DTG Digital Temperature Gauge carries on the tradition of accurate and reliable electronic temperature indication, while incorporating many new features tailored to a growing industry. Health concerns related to mercury continue to grow, and the days of the traditional (MIG) mercury-in-glass thermometer on the process floor are numbered.

As regulations in the Retort Cooker industry change, and plants look to adopt new technology, the DTG is there to offer a solution. Building on a solid platform of accuracy and reliability, the DTG incorporates additional features specific to this demanding market. Redundant temperature elements provide continuous error checking. Unlike traditional MIG's or simple off the shelf components, this unique feature provides backup so your process can continue to run, with no emergency downtime. Certification of calibration against an NIST traceable source is provided with each unit. For facilities with in-house Metrology capability, the DTG offers up to five user configurable calibration points, so you can fine tune in order to perfectly match your in-house reference.

Complete specifications and ordering information are available on the reverse. For additional information please visit us on the web at www.anderson-negele.com, or contact your local Authorized Anderson-Negele Distributor.

Authorizations



Features


- Ideal replacement for Mercury-In-Glass thermometers
- Designed for Retort Cookers
- Operates on field replaceable batteries
- Large Liquid Crystal Display makes viewing easy and repeatable
- All models offer field calibration capability
- Dual element and onboard diagnostics; complies with Code of Federal Regulations



Specifications

Compliance:	CE, NEMA 4X, IP-66	Display:	LCD: 4 digit main display, 6 digit secondary; 0.9" high contrast LCD
Product Contact Surface:	Fitting & Probe: 316L SS	Error Warning:	LCD flashing
Non-Product Contact Surface:	Housing - 304 SS	Power:	Field replaceable battery; Thionyl Chloride Lithium 3.6VDC; AA package
Process Temp. Range:	0 to 300°F (-18 to 150°C)	Battery Life:	18 months typical (With use of Thionyl Chloride Lithium battery only)
Units:	Deg F and Deg C; field selectable	Vibration:	10 to 60 Hz, 2g
Resolution:	0.1°F or °C	Warranty:	2 year
Accuracy:	+/- .5°F (+/-0.3°C) Full Scale	Display Update:	3 seconds
Ambient Operating Limits:	40 to 158°F (4.4 to 70°C) (With use of Thionyl Chloride Lithium battery only)	Calibration Adjustment:	Via onboard switches; up to five field adjustable points
Ambient Temp. Stability:	Better than 0.1°C per 10°C ambient shift	Surface Finish:	R _a max = 32 micro inches
Storage Temp.:	32 to 140°F (0 to 65°C)		

Order Information

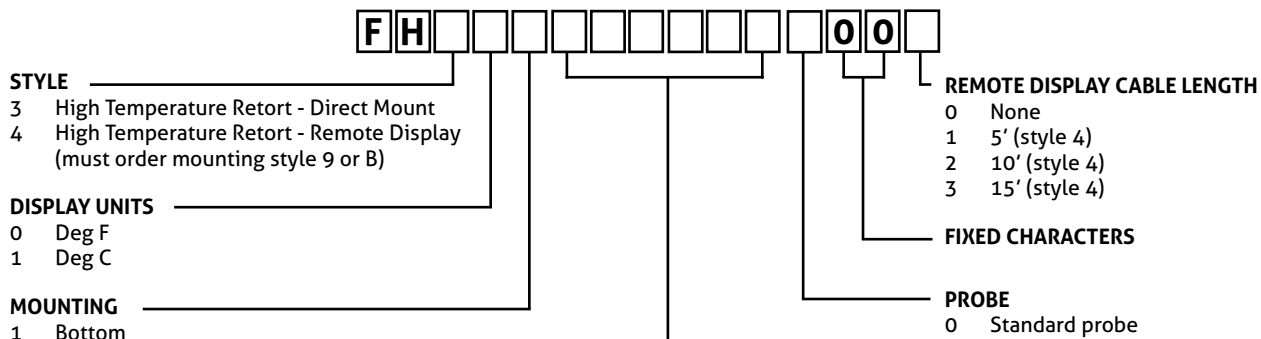

Mounting

	1	Bottom mount (fixed display)
	4	Back mount 90° (fixed display)
	5	Left mount (fixed display)
	6	Right Mount (fixed display)
	7	Top mount (fixed display)
	8	Back mount 45° (fixed display)
	9	Remote mount (cable exits probe - straight)
	A	Back mount 90° (display rotates ± 90°)

Consult factory for other fittings.

* Typical MIG Thermometer replacement probes.

† Sensors with these options are non-cancellable/ non-returnable for credit.

SPARE PARTS

Part#	Description
62071A0001	Thionyl Chloride Lithium batteries 3.6VDC; AA package
41100A0002	1-1/4" 18UNEF IAMD nut to 3/4" NPT
SP55408C0001	Pack of two back plate seal screws