



Direct-acting 3/2-way plunger valve

- Direct-acting and compact small valve up to DN 1.6
- Slipped over coil system
- Banjo fitting for direct mounting on pneumatic valves
- Simple and fast push-in, flange or manifold mounting
- Explosion-proof variants

Product variants described in the data sheet may differ from the product presentation and description.

Type description

The 7012 valve is a direct-acting plunger valve. The stopper and the core guide tube are welded together to increase pressure resistance and leak-tightness. Various housing and seal material combinations are available depending on the actual application. A Bürkert-specific flange variant (SFB) enables the space-saving arrangement of valves on a multiple manifold. The range is supplemented by explosion-proof variants. Push-in fittings can be selected for a flexible hose connection. A banjo fitting with banjo bolt is the ideal solution for easy direct mounting on a pneumatic actuator. Optional manual override enables quick start-up and optimal maintenance. In combination with a plug to industry standard shape B or DIN EN 17301-803 shape C, the valves satisfy degree of protection IP65.

Table of contents

1. General technical data	4
1.1. Standard and banjo version.....	4
1.2. ATEX/IECEX cable version	5
2. Circuit functions	5
3. Approvals and conformities	6
3.1. General notes.....	6
3.2. Conformity	6
3.3. Standards.....	6
3.4. Explosion protection	6
3.5. North America (USA/Canada)	6
3.6. Foods and beverages/Hygiene	6
4. Materials	7
4.1. Bürkert resistApp	7
4.2. Material specifications	7
Standard version	7
Banjo version	8
5. Dimensions	9
5.1. Standard version	9
Threaded version	9
Flange version	10
Flange pattern	11
5.2. Coil versions.....	11
Versions according to industry standard form B	11
Further electrical connections.....	12
5.3. Banjo version	12
5.4. Single manifold	13
5.5. Multiple manifold.....	14
Manifolds for valves with 20 mm coil (SG2).....	14
Manifolds for valves with 24.5 mm coil (SG3).....	15
6. Device/Process connections	16
6.1. Pin assignment	16
7. Performance specifications	17
7.1. Power consumption	17
Standard version, coil size 24.5 mm [0.96 in]	17
Standard version, coil size 20 mm [0.79 in]	17
8. Ordering information	18
8.1. Bürkert eShop	18
8.2. Bürkert product filter.....	18
8.3. Bürkert Product Enquiry Form	18
8.4. Ordering chart	19
Standard version according to industry standard form B, coil size 24.5 mm [0.96 in], coil UL Recognized (cURus)	19
Standard version according to industry standard form B, coil size 20 mm [0.79 in], coil UL Recognized (cURus)	21
Banjo version, coil UL Recognized (cURus)	23
Additional options	24
8.5. Ordering chart accessories	25
Single manifold	25

Multiple manifold.....25

Accessories for manifolds.....25

Cable plug Type 2516, form C according to DIN EN 175301 - 803.....25

Cable plug Type 2507, form B according to industry standard26

DTS 1000582647 EN Version: A Status: RL (released | freigegeben | valide) printed: 08.02.2024

1. General technical data

1.1. Standard and banjo version

Product properties	
Dimensions	Further information can be found in chapter "5. Dimensions" on page 9.
Material	
Seal	FKM, EPDM
Body	Brass, polyamide (PA), stainless steel 1.4305/303
Manual override	Optional, standard for Type 7012 banjo version
Weight	
Standard version 24.5 mm solenoid coil	5 ¼ oz (with NPT ½)
Standard version 20 mm solenoid coil	4 ¼ oz (with NPT ½)
Banjo version	4 ¾ oz
Orifice	DN 1.2...DN 2.0
Circuit function	C and D
	Further information can be found in chapter "2. Circuit functions" on page 5.
Thermal insulation class of solenoid coil	Epoxy coil class H
Performance data	
Nominal operating mode	
Single valve	Continuous operation 100 % ED resp. 50 % ED
For block mounting on multiple manifold	With 4 W/5 W solenoid coil 100 % ED (at max. 131 °F)
Switching time^{1.)}	
Standard version	Orifice 1.2...1.6 mm: opening 8...12 ms, closing 8...12 ms
Banjo version	Orifice 1.2 mm: opening 7...12 ms, closing 7...12 ms
Electrical data	
Operating voltage	24 DC, 24 V/50 Hz, 24 V/60 Hz, 110 V/50 Hz, 120 V/60 Hz, 230 V/50 Hz, 240 V/60 Hz
Power consumption	Further information can be found in chapter "7. Performance specifications" on page 17.
Voltage tolerance	± 10 %
Medium data	
Operating medium	Neutral gases and liquids (e.g. compressed air, water, hydraulic oil, technical vacuum)
Medium temperature	
Standard version	+ 14 °F...+ 212 °F
Banjo version	+ 14 °C...+ 140 °F
Viscosity	Max. 21 cSt
Process/Port connection & communication	
Electrical connection	• Acc. to DIN EN 175301 - 803 form C for cable plug Type 2516 • Acc. to industry standard form B for cable plug Type 2507 • Flat pin terminal as protection class III device • Flying leads connection on request for coil size 20 mm
Port connection	
Standard version	M5, G ½, NPT ½, Flange
Banjo version	G ½, G ¼, NPT ½, NPT ¼ and hose connector Ø 6 mm
Approvals and conformities	
Degree of protection	IP65 with cable plug
North America (USA/Canada)	Further information can be found in chapter "3.5. North America (USA/Canada)" on page 6.
Foods and beverages/Hygiene	Further information can be found in chapter "3.6. Foods and beverages/Hygiene" on page 6.
Environment and installation	
Installation position	As required, preferably with actuator upright
Ambient temperature	
Standard version	Max. + 131 °F resp. 167 °F (depending on power level)
Banjo version	+ 14 °F...+ 131 °F resp. 167 °F (depending on power level)

1.) Measurement at + 68 °F, 87 psi at the valve outlet acc. to DIN ISO 12238:2001, opening: pressure build-up 0...10 %, closing: pressure reduction 100...90 %

1.2. ATEX/IECEx cable version

Product properties

Material

Seal	FKM, EPDM
Body	Brass, stainless steel 1.4305/303

Circuit function	A and B Further information can be found in chapter “2. Circuit functions” on page 5.
------------------	--

Available coil size	SG3 (24.5 mm width)
---------------------	---------------------

Performance data

Operating pressure	Up to 34 bar (depending on orifice and coil power)
--------------------	--

Medium data

Operating medium	Neutral gases and liquids (e.g. compressed air, water, hydraulic oil, technical vacuum)
------------------	---

Medium temperature ^{1.)}

FKM	-10 °C...+100 °C
EPDM	-30 °C...+100 °C

Process/Port connection & communication

Electrical connection	ATEX/IECEx cable version with 3 m moulded-in cable
-----------------------	--

Port connection

Thread	G 1/8, NPT 1/8, RC 1/8, M5, UNF 10-32
Flange	Flange “FK01”

Approvals and conformities

Degree of protection	IP65 with cable plug and ATEX/IECEx cable version
Explosion protection	Further information can be found in chapter “3.4. Explosion protection” on page 6.



Environment and installation

Ambient temperature ^{1.)}

FKM	-10 °C...+55 °C (max. +60 °C on request)
EPDM	-30 °C...+55 °C (max. +60 °C on request)

1.) The minimum temperature depends on the seal material.

2. Circuit functions

Symbol	Description
	Circuit function C (CF C) 3/2-way solenoid valve Direct-acting Normally closed
	Circuit function D (CF D) 3/2-way solenoid valve Direct-acting Normally open

3. Approvals and conformities

3.1. General notes

- The approvals and conformities listed below must be stated when making enquiries. This is the only way to ensure that the product complies with all required specifications.
- Not all available versions can be supplied with the below mentioned approvals or conformities.

3.2. Conformity

In accordance with the Declaration of Conformity, the product is compliant with the EU Directives.

3.3. Standards

The applied standards which are used to demonstrate compliance with the EU Directives are listed in the EU-Type Examination Certificate and/or the EU Declaration of Conformity.

3.4. Explosion protection

Approval	Description
 	Optional: Explosion protection (valid for coils with fixed cable outlet) ATEX: EPS 21 ATEX 1 128 X II 2G Ex mb IIC T4 Gb II 2D Ex mb IIIC T130 °C Db IECEx: IECEx EPS 21.0045X Ex mb IIC T4 Gb Ex mb IIIC T130 °C Db Fixed cable is halogen-free according to IEC 60754 - 1

3.5. North America (USA/Canada)

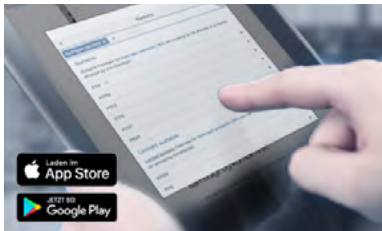
Approval	Description
	Valid for coils:: UL Recognized for the USA and Canada The coils are UL Recognized for the USA and Canada according to: • UL 429 (electrically operated valves) • CAN/CSA-C22.2 No. 139

3.6. Foods and beverages/Hygiene

Conformity	Description
FDA	FDA – Code of Federal Regulations (valid for the variable code PL02, PL03) All wetted materials are compliant with the Code of Federal Regulations published by the FDA (Food and Drug Administration, USA) according to the manufacturer's declaration.
USP	United States Pharmacopeial Convention (USP) (valid for the variable code PL04) All wetted materials are biocompatible according to the manufacturer's declaration.
	EC Regulation 1935/2004 of the European Parliament and of the Council (valid for the variable code PL01, PL02) All wetted materials are compliant with EC Regulation 1935/2004/EC according to the manufacturer's declaration.

4. Materials

4.1. Bürkert resistApp



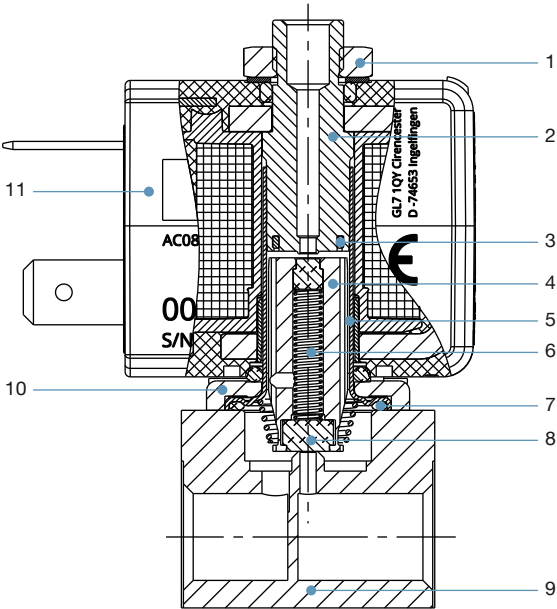
Bürkert resistApp – Chemical resistance chart

You want to ensure the reliability and durability of the materials in your individual application case? Verify your combination of media and materials on our website or in our resistApp.

[Start chemical resistance check](#)

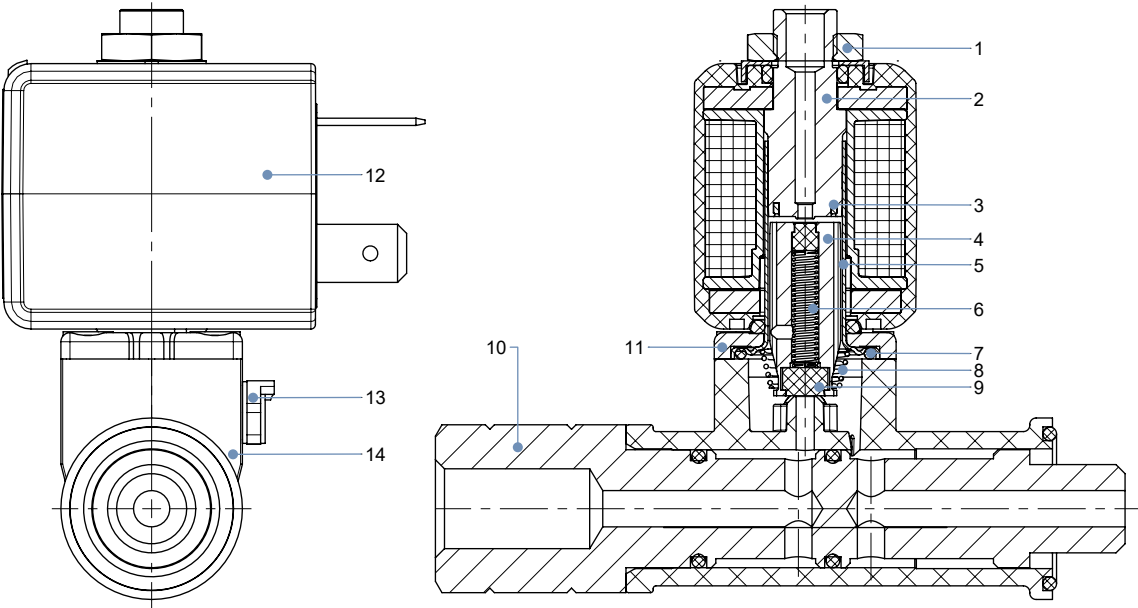
4.2. Material specifications

Standard version



No.	Element	Material
1	Locknut	DIN 176 Surface finish thick film passivated KOSA0101
2	Stopper	Stainless steel 1.4113/434
3	Shading ring	Copper (silver optional)
4	Core	Stainless steel 1.4113/434
5	Core guide tube	Stainless steel 1.4303/305L
6	Spring	Stainless steel 1.4310/301
7	O-ring	FKM/EPDM
8	Seal	FKM/EPDM
9	Valve body	Brass, stainless steel 1.4305/303 PA (polyamide)
10	Flange	• Surface finish thick film passivated KOSA0101 (brass version) • Nickel-plated surface (stainless steel version)
11	Coil	Epoxy

Banjo version



No.	Element	Material
1	Locknut	DIN 176 Surface finish thick film passivated KOSA0101
2	Stopper	Stainless steel 1.4113
3	Shading ring	Copper (silver optional)
4	Core	Stainless steel 1.4113
5	Core guide tube	Stainless steel 1.4303 ST
6	Spring	Stainless steel 1.4310
7	O-ring	FKM
8	Spring	Stainless steel 1.4310
9	Seal	FKM
10	Banjo bolt	Nickel-plated brass
11	Flange	• Surface finish thick film passivated KOSA0101 (brass version) • Nickel-plated surface (stainless steel version)
12	Coil	Epoxy
13	Manual override	Durethan
14	Body	PPS (polyphenylene sulphide)

DTS 1000582647 EN Version: A Status: RL (released | freigegeben | valide) printed: 08.02.2024

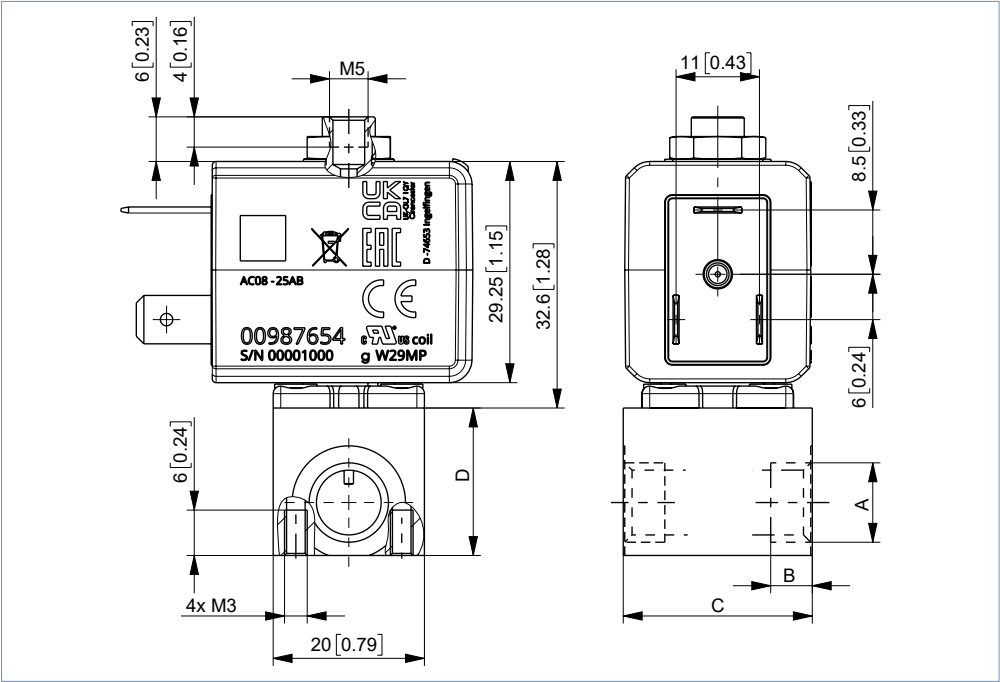
5. Dimensions

5.1. Standard version

Threaded version

Note:

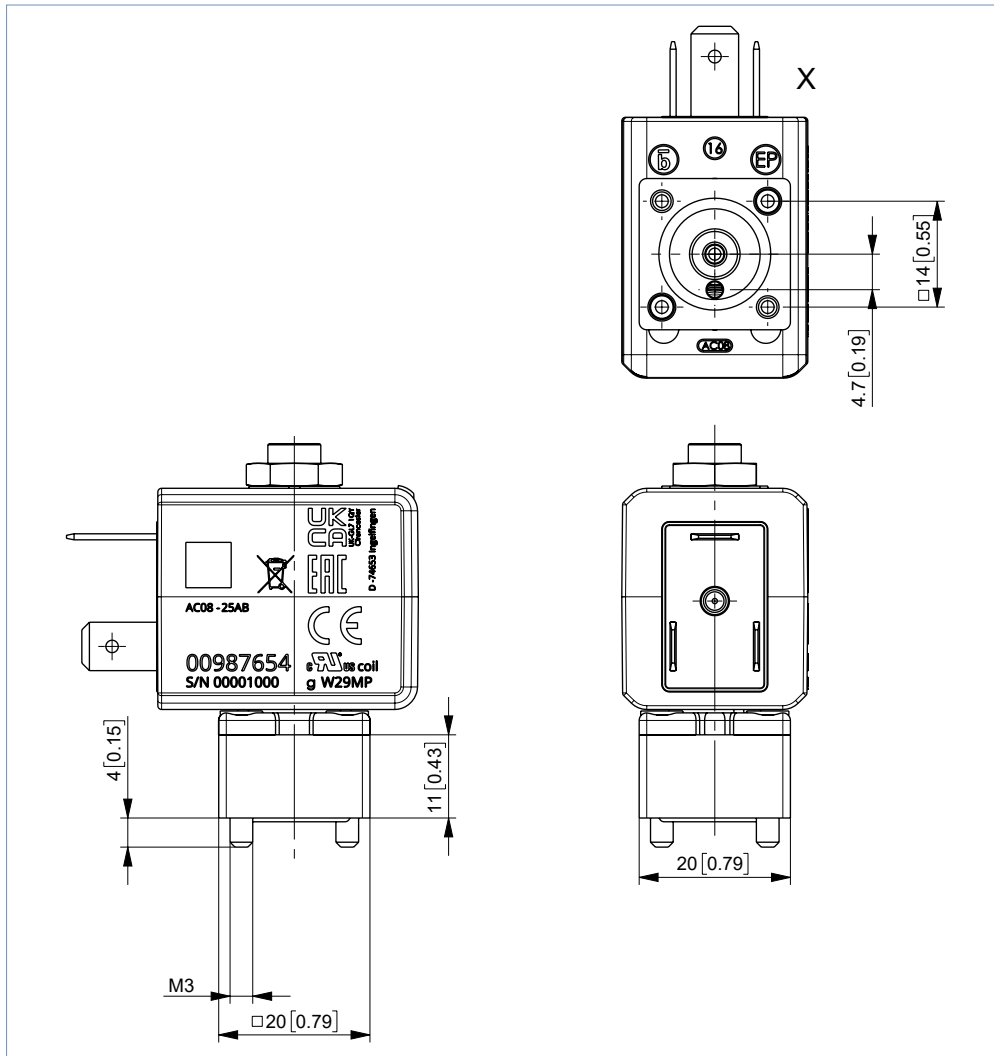
- Dimensions in mm [inch]
- Versions according to industry standard form B



Port connection	A	B		C		D	
		[mm]	[in]	[mm]	[in]	[mm]	[in]
Thread	M5	5	0.19	20	0.78	14	0.55
	G 1/8	8	0.31	25	0.98	19.5	0.74
	NPT 1/8	7	0.31	25	0.98	19.5	0.74

Flange version
Note:

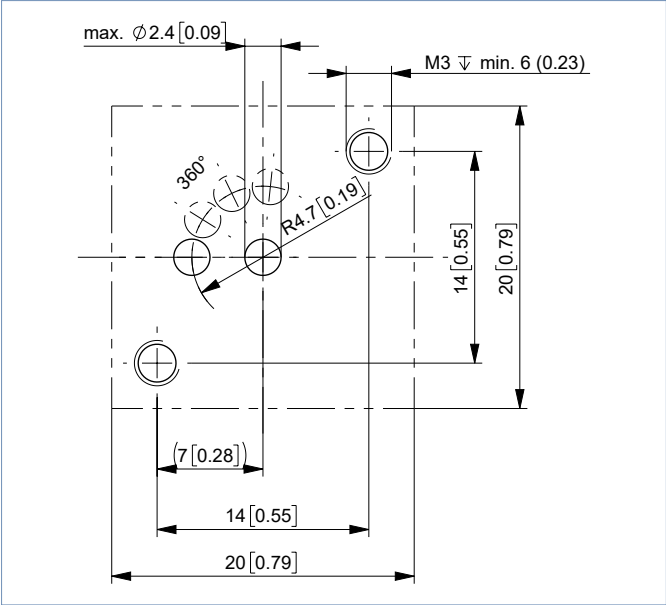
- Dimensions in mm [inch]
- Versions according to industry standard form B



Flange pattern

Note:

- Dimensions in mm [inch]
- On the connection side, the geometries are to be realised as shown in the following drawing.
- Flange version (FK01) according to FST 1000225877

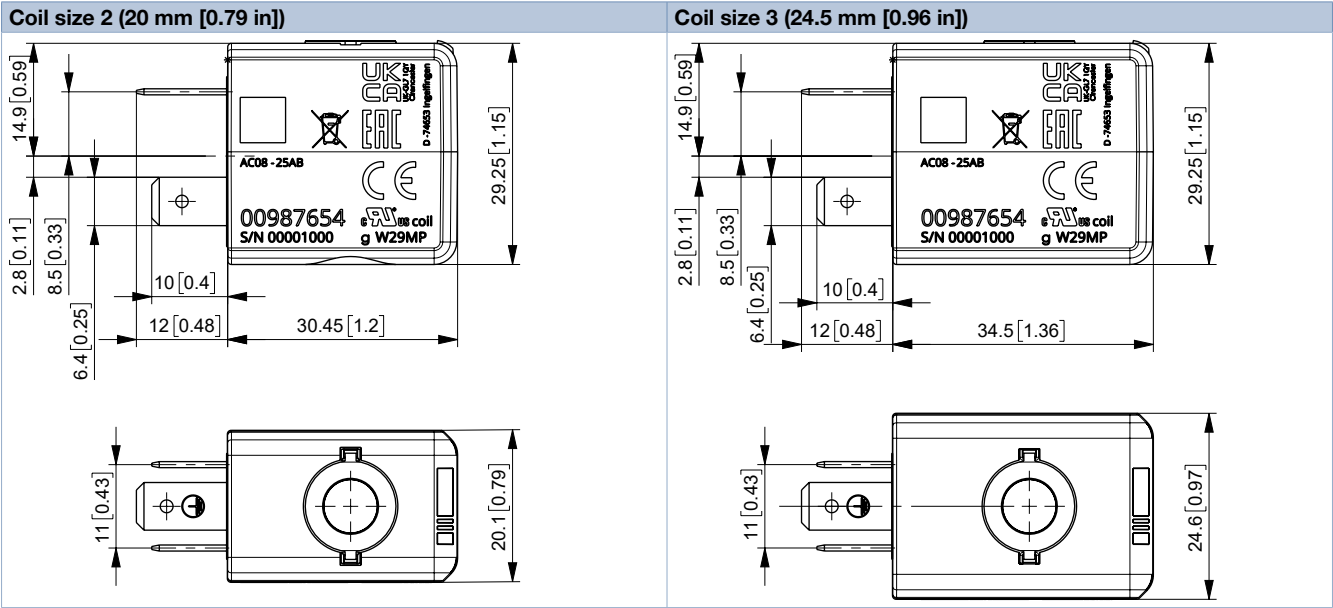


5.2. Coil versions

Versions according to industry standard form B

Note:

Dimensions in mm [inch]



Further electrical connections

Note:

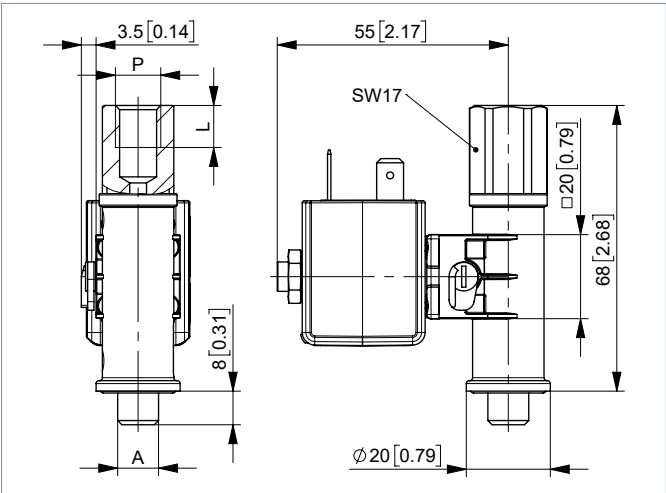
- Dimensions in mm [inch]
- Specifications apply to coil sizes 20 mm [0.79 in] and 24.5 mm [0.96 in]

Version flat pin terminal as protection class III device	Version according to DIN EN 175301 - 803 form C

5.3. Banjo version

Note:

- Dimensions in mm [inch]
- Coil size 24.5 mm [0.96 in]
- Plug connection for compressed air: Pressure port P can be continuously rotated through 360°.
- Available orifices: 1.6 mm and 2.0 mm

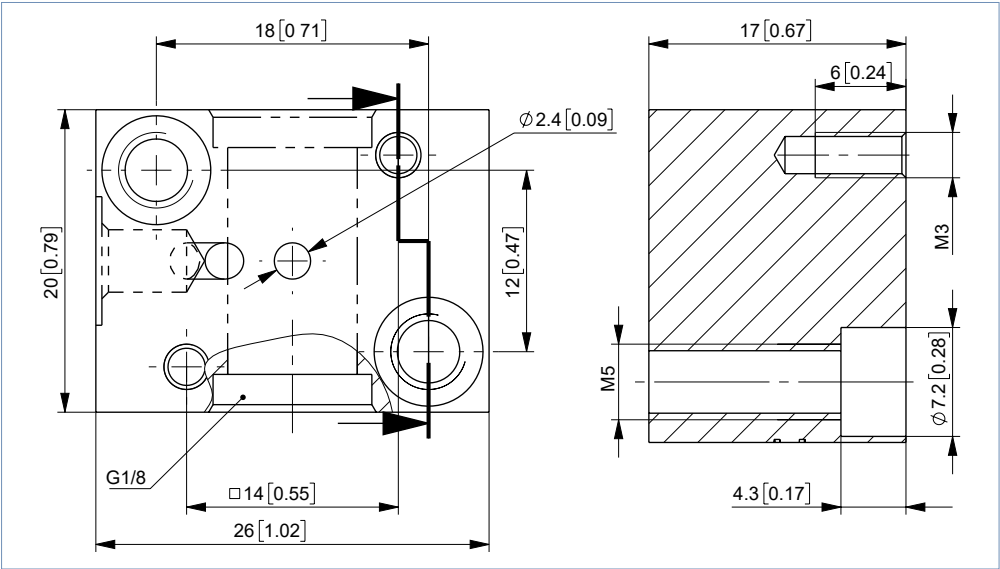


Version	P [Zoll]	A [Zoll]	L [mm]	[inch]
BJ01	G 1/8	G 1/8	8	0.31
BJ02	G 1/4	G 1/4	12	0.47
BJ03	NPT 1/4	G 1/8	12.9	0.51
BJ04	NPT 1/4	G 1/4	12.9	0.51
BJ05	G 1/4	G 1/8	12	0.47
BJ06	G 1/8	G 1/4	8	0.31
BJ07	NPT 1/8	G 1/8	8.9	0.35

5.4. Single manifold

Note:

- Dimensions in mm [inch]
- Can only be combined with valves with coil size 20 mm [0.79 in]
- Manifolds with valves of coil size 24.5 mm [0.96 in] on request



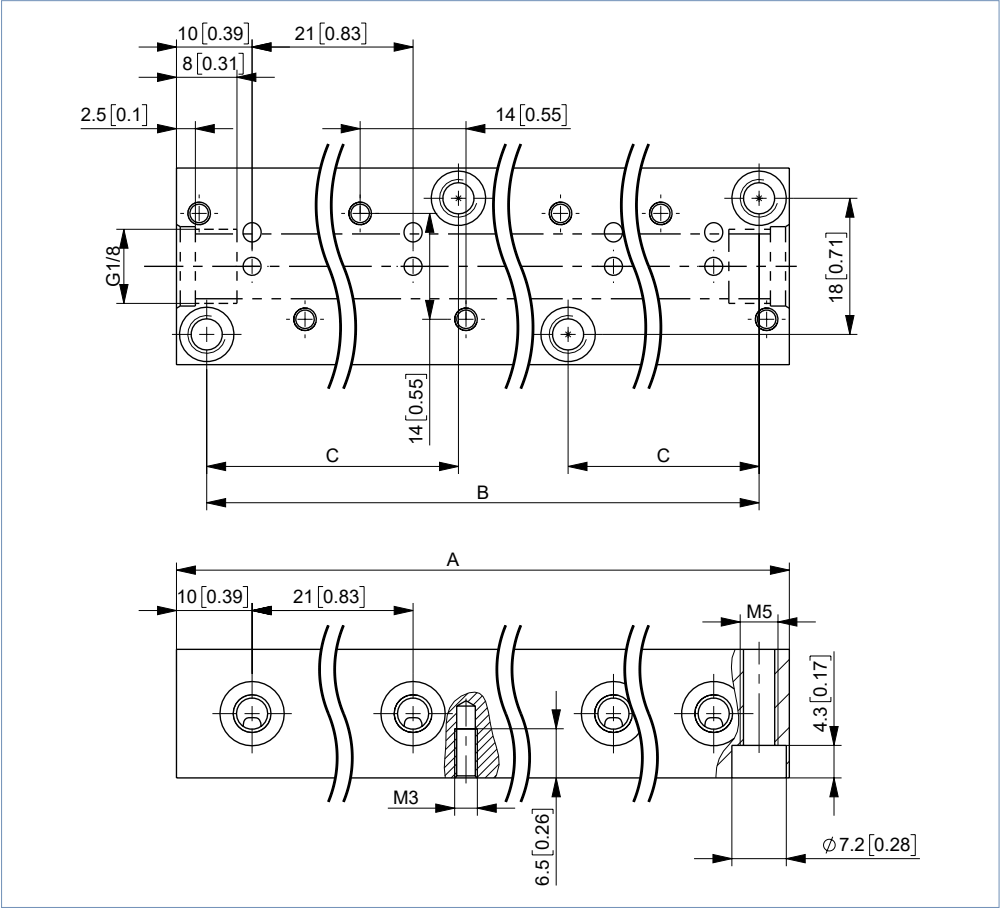
Quantity of valve places	A		B		C		Article no.
	[mm]	[in]	[mm]	[in]	[mm]	[in]	
1	20	0.78	12	0.47	–	–	005312 

5.5. Multiple manifold

Manifolds for valves with 20 mm coil (SG2)

Note:

- Dimensions in mm [inch]
- Can only be combined with Type 7012 valves with coil size 20 mm [0.79 in]

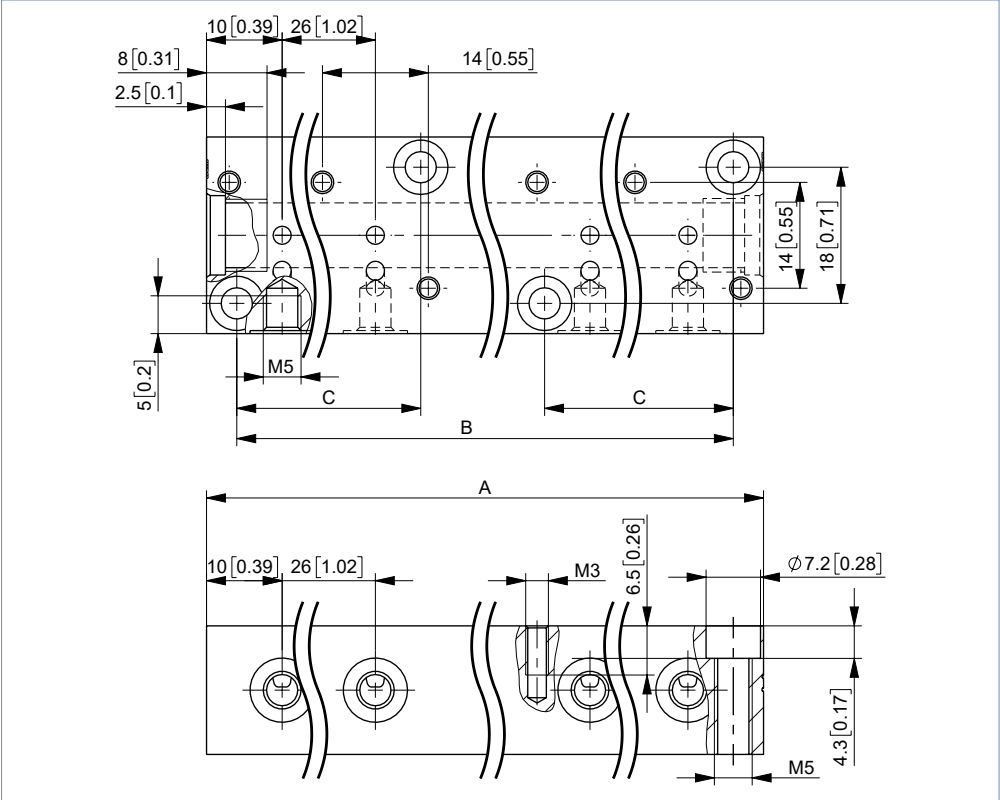


Quantity of valve places	A		B		C		Article no.
	[mm]	[in]	[mm]	[in]	[mm]	[in]	
2	41	1.61	33	1.29	–	–	005355
3	62	2.44	54	2.12	–	–	005313
4	83	3.26	75	2.95	–	–	005314
5	104	4.09	96	3.77	–	–	005315
6	125	4.92	117	4.6	–	–	005316
7	146	5.74	138	5.43	–	–	005893
8	167	6.57	159	6.25	54	2.12	005166
9	188	7.4	180	7.08	54	2.12	005241
10	209	8.22	201	7.91	75	2.95	005819
11	230	9.05	222	8.74	75	2.95	005242
12	251	9.88	243	9.56	96	3.77	005222

Manifolds for valves with 24.5 mm coil (SG3)

Note:

- Dimensions in mm
- Can only be combined with Type 7012 valves with coil size 24.5 mm [0.965 in]

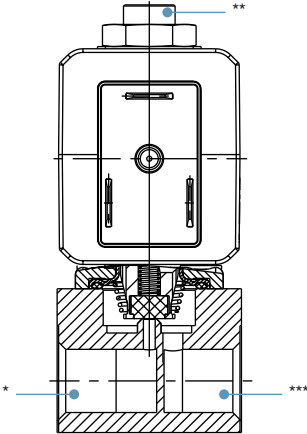
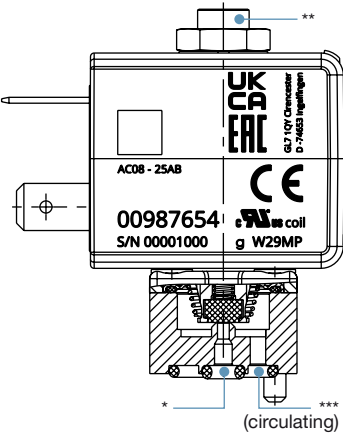


Quantity of valve places	A		B		C		Article no.
	[mm]	[in]	[mm]	[in]	[mm]	[in]	
2	46	1.81	38	1.49	–	–	60021427
3	72	2.83	64	2.51	–	–	60021342
4	98	3.85	90	3.54	–	–	60021429
5	124	4.88	116	4.56	–	–	60021428
6	150	5.9	142	5.59	–	–	60021442
7	176	6.92	168	6.61	–	–	20060327
8	202	7.95	194	7.63	64	2.51	20060338
9	228	8.97	220	8.66	64	2.51	20060341
10	254	10	246	9.67	90	3.54	20015744
11	280	11.02	272	10.7	90	3.54	20060374
12	306	12.04	298	11.73	116	4.56	20060376

6. Device/Process connections

6.1. Pin assignment

For the positions marked with *, ** or *** in the drawing, the connections are marked with the letters shown in the table above, depending on the circuit function. Unused connections in circuit functions A or B will be closed off with a blanking plug or cap nut.

Circuit function	Connection Type			Threaded version	Flange version
	*	**	***		
A	P	to lock	A		
B	to lock	B	P		
C	P	R	A		
D	R	P	B		
T	P	R	A		

7. Performance specifications

7.1. Power consumption

Standard version, coil size 24.5 mm [0.96 in]

Coil	Orifice [mm]	Electrical power					Switching times ^{1.)}	
		Inrush AC [VA]	Hold AC [VA]	[W]	DC Cold [W]	Hot [W]	Opening [ms]	Closing [ms]
24 V/DC/7 W	1.2	–	–	–	7	5.5	8...12	8...12
	1.6							
	2.0							
24 V/DC/5.5 W	1.2	–	–	–	5.5	4.5		
	1.6							
	2.0							
24 V/50 Hz/4 W	1.2	12	6.5	4	–	–		
	1.6							
	2.0							
230 V/50 Hz/4 W	1.2	12	6.5	4	–	–		
	1.6							
	2.0							

1.) Measurement at +68 °F, 87 psi^{2.)} at the valve outlet acc. to DIN ISO 12238:2001, opening: pressure build-up 0...10 %, closing: pressure reduction 100...90 %

2.) Pressure data: overpressure to atmospheric pressure and air as a medium

Standard version, coil size 20 mm [0.79 in]

Coil	Orifice [mm]	Electrical power					Switching times ^{1.)}	
		Inrush AC [VA]	Hold AC [VA]	[W]	DC Cold [W]	Hot [W]	Opening [ms]	Closing [ms]
24 V/DC/6.5 W	1.2	–	–	–	6.5	5	8...12	8...12
	1.6							
	2.0							
24 V/50 Hz/6 W	1.2	11	7	6	–	–		
	1.6							
	2.0							
230 V/50 Hz/6 W	1.2	11	7	6	–	–		
	1.6							
	2.0							
24 V/DC/5 W	1.2	–	–	–	5	4		
	1.6							
	2.0							
24 V/50 Hz/4 W	1.2	9	5	4	–	–		
	1.6							
	2.0							
230 V/50 Hz/4 W	1.2	9	5	4	–	–		
	1.6							
	2.0							

1.) Measurement at +68 °F, 87 psi^{2.)} at the valve outlet acc. to DIN ISO 12238:2001, opening: pressure build-up 0...10 %, closing: pressure reduction 100...90 %

2.) Pressure data: overpressure to atmospheric pressure and air as a medium

8. Ordering information

8.1. Bürkert eShop



Bürkert eShop – Easy ordering and quick delivery

You want to find your desired Bürkert product or spare part quickly and order directly? Our online shop is available for you 24/7. Sign up and enjoy all the benefits.

[Order online now](#)

8.2. Bürkert product filter

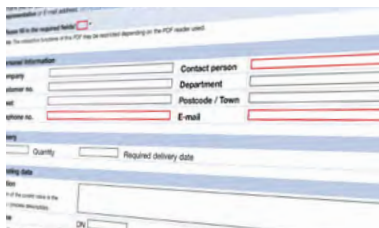


Bürkert product filter – Get quickly to the right product

You want to select products comfortably based on your technical requirements? Use the Bürkert product filter and find suitable articles for your application quickly and easily.

[Try out our product filter](#)

8.3. Bürkert Product Enquiry Form



Bürkert Product Enquiry Form – Your enquiry quickly and compactly

Would you like to make a specific product enquiry based on your technical requirements? Use our Product Enquiry Form for this purpose. There you will find all the relevant information for your Bürkert contact. This will enable us to provide you with the best possible advice.



[Fill out the form now](#)


8.4. Ordering chart

Standard version according to industry standard form B, coil size 24.5 mm [0.96 in], coil UL Recognized (cURus)

Note:

All valves are delivered without a cable plug.

Circuit function	Port connection	Orifice	C _v value water ^{1.)}	Voltage/ Frequency/ Power	Maximum duty cycle	Pressure range ^{2.)3.)} (MAWP ^{4.)})		Article no.	
		[mm]	[gal/min]	[V/Hz/W]		Ambient temperature 167 °F	Ambient temperature 131 °F	Brass body	Stainless steel body
						Air + water	Air + water	FKM seal	
CF C 3/2-way solenoid valve Direct-acting Normally closed 	NPT ⅛	1.2	0.05	24/DC/7	100 % ED	–	0...189	o. r.	o. r.
				24/DC/5.5		0...167	0...167	o. r.	o. r.
				24/60/4		0...189	0...189	o. r.	o. r.
				120/60/4		0...189	0...189	o. r.	o. r.
				240/60/4		0...189	0...189	o. r.	o. r.
		1.6	0.07	24/DC/7	100 % ED	–	0...109	o. r.	o. r.
				24/DC/5.5		0...87	0...87	o. r.	o. r.
				24/60/4		0...109	0...109	o. r.	o. r.
				120/60/4		0...109	0...109	o. r.	o. r.
				240/60/4		0...109	0...109	o. r.	o. r.
		2.0 ^{5.)}	0.13	24/DC/7	100 % ED	–	0...102	o. r.	o. r.
				24/DC/5.5		0...73	0...73	o. r.	o. r.
				24/60/4		0...87	0...87	o. r.	o. r.
				120/60/4		0...87	0...87	o. r.	o. r.
				240/60/4		0...87	0...87	o. r.	o. r.
	Manifold (FK01)	1.2	0.05	24/DC/7	100 % ED	–	0...189	379906 	380132 
				24/DC/5.5		0...167	0...167	390269 	390271 
				24/60/4		0...189	0...189	o. r.	o. r.
				120/60/4		0...189	0...189	o. r.	o. r.
				240/60/4		0...189	0...189	o. r.	o. r.
		1.6	0.07	24/DC/7	100 % ED	–	0...109	379915 	380137 
				24/DC/5.5		0...87	0...87	390275 	390273 
				24/60/4		0...109	0...109	o. r.	o. r.
				120/60/4		0...109	0...109	o. r.	o. r.
				240/60/4		0...109	0...109	o. r.	o. r.
		2.0 ^{5.)}	0.13	24/DC/7	100 % ED	–	0...102	o. r.	o. r.
				24/DC/5.5		0...73	0...73	o. r.	o. r.
				24/60/4		0...87	0...87	o. r.	o. r.
				120/60/4		0...87	0...87	o. r.	o. r.
				240/60/4		0...87	0...87	o. r.	o. r.
CF D 3/2-way solenoid valve Direct-acting Normally open 	NPT ⅛	1.2	0.05	24/DC/5.5	100 % ED	0...145	0...145	o. r.	o. r.
				24/60/4		0...145	0...145	o. r.	o. r.
				120/60/4		0...145	0...145	o. r.	o. r.
				240/60/4		0...145	0...145	o. r.	o. r.
		1.6	0.07	24/DC/5.5	100 % ED	0...87	0...87	o. r.	o. r.
				24/60/4		0...87	0...87	o. r.	o. r.
				120/60/4		0...87	0...87	o. r.	o. r.
				240/60/4		0...87	0...87	o. r.	o. r.
		2.0 ^{5.)}	0.13	24/DC/5.5	100 % ED	0...116	0...116	o. r.	o. r.
				24/60/4		0...102	0...102	o. r. ^{6.)}	o. r. ^{6.)}
				120/60/4		0...102	0...102	o. r. ^{6.)}	o. r. ^{6.)}
				240/60/4		0...102	0...102	o. r. ^{6.)}	o. r. ^{6.)}
				240/60/4		0...102	0...102	o. r. ^{6.)}	o. r. ^{6.)}

Circuit function	Port connection	Orifice	C _v value water ^{1.)}	Voltage/ Frequency/ Power	Maximum duty cycle	Pressure range ^{2.)3.)} (MAWP ^{4.)}		Article no.	
						Ambient temperature 167 °F	Ambient temperature 131 °F	Brass body	Stainless steel body
		[mm]	[gal/min]	[V/Hz/W]		Air + water [psi]	Air + water [psi]	FKM seal	
CF D 3/2-way solenoid valve Direct-acting Normally open 	Manifold (FK01)	1.2	0.05	24/DC/5.5	100 % ED	0...145	0...145	390450 ☞	390452 ☞
				24/60/4		0...145	0...145	o. r.	o. r.
				120/60/4		0...145	0...145	o. r.	o. r.
				240/60/4		0...145	0...145	o. r.	o. r.
		1.6	0.07	24/DC/5.5	100 % ED	0...87	0...87	390462 ☞	390464 ☞
				24/60/4		0...87	0...87	o. r.	o. r.
				120/60/4		0...87	0...87	o. r.	o. r.
				240/60/4		0...87	0...87	o. r.	o. r.
		2.0 ^{5.)}	0.13	24/DC/5.5	100 % ED	0...116	0...116	o. r.	o. r.
				24/60/4		0...102	0...102	o. r. ^{6.)}	o. r. ^{6.)}
				120/60/4		0...102	0...102	o. r. ^{6.)}	o. r. ^{6.)}
				240/60/4		0...102	0...102	o. r. ^{6.)}	o. r. ^{6.)}

o. r.: on request

1.) Measurement at + 68 °F, 14.5^{2.)} bar at the valve inlet and free outlet

2.) Pressure data: overpressure to atmospheric pressure and air as a medium

3.) Number of switching cycles under laboratory conditions (FKM seal, oiled air, unpressurised, DC): 5 million. Please note that an increase in switching pressure can limit the life of the seat seal.


4.) Maximum allowable working pressure


5.) Limited swelling compensation

6.) Can also be feasible with coil size 2

Standard version according to industry standard form B, coil size 20 mm [0.79 in], coil UL Recognized (cURus)
Note:

All valves are delivered without a cable plug.

Circuit function	Port connection	Orifice	C _v value water ^{1,3}	Voltage/ Frequency/ Power	Maximum duty cycle	Pressure range ^{2,3,4} (MAWP ^{4,5})		Article no.	
						Ambient temperature 167 °F	Ambient temperature 131 °F	Brass body	Stainless steel body
		[mm]	[gal/min]	[V/Hz/W]		Air + water [psi]	Air + water [psi]	FKM seal	
CF C 3/2-way solenoid valve Direct-acting Normally closed 	NPT 1/8	1.2	0.05	24/DC/6.5	100 % ED	–	0...160	o. r.	o. r.
				24/60/6		–	0...189	o. r.	o. r.
				120/60/6		–	0...189	o. r.	o. r.
				240/60/6		–	0...189	o. r.	o. r.
				24/DC/5		0...145	0...145	o. r.	o. r.
				24/60/4		0...160	0...160	o. r.	o. r.
				120/60/4		0...160	0...160	o. r.	o. r.
				240/60/4		0...160	0...160	o. r.	o. r.
		1.6	0.07	24/DC/6.5	100 % ED	–	0...87	o. r.	o. r.
				24/60/6		–	0...109	o. r.	o. r.
				120/60/6		–	0...109	o. r.	o. r.
				240/60/6		–	0...109	o. r.	o. r.
				24/DC/5		0...80	0...80	o. r.	o. r.
				24/60/4		0...87	0...87	o. r.	o. r.
				120/60/4		0...87	0...87	o. r.	o. r.
				240/60/4		0...87	0...87	o. r.	o. r.
		2.0 ^{5,6}	0.13	24/DC/6.5	100 % ED	–	0...73	o. r.	o. r.
				24/60/6		–	0...87	o. r.	o. r.
				120/60/6		–	0...87	o. r.	o. r.
				240/60/6		–	0...87	o. r.	o. r.
				24/DC/5		0...58	0...58	o. r.	o. r.
				24/60/4		0...80	0...80	o. r.	o. r.
				120/60/4		0...80	0...80	o. r.	o. r.
				240/60/4		0...80	0...80	o. r.	o. r.
	Manifold (FK01)	1.2	0.05	24/DC/6.5	100 % ED	–	0...160	o. r.	o. r.
				24/60/6		–	0...189	o. r.	o. r.
				120/60/6		–	0...189	o. r.	o. r.
				240/60/6		–	0...189	o. r.	o. r.
				24/DC/5		0...145	0...145	o. r.	o. r.
				24/60/4		0...160	0...160	o. r.	o. r.
				120/60/4		0...160	0...160	o. r.	o. r.
				240/60/4		0...160	0...160	o. r.	o. r.
		1.6	0.07	24/DC/6.5	100 % ED	–	0...87	o. r.	o. r.
				24/60/6		–	0...109	o. r.	o. r.
				120/60/6		–	0...109	o. r.	o. r.
				240/60/6		–	0...109	o. r.	o. r.
				24/DC/5		0...80	0...80	o. r.	o. r.
				24/60/4		0...87	0...87	o. r.	o. r.
				120/60/4		0...87	0...87	o. r.	o. r.
				240/60/4		0...87	0...87	o. r.	o. r.
		2.0 ^{5,6}	0.13	24/DC/6.5	100 % ED	–	0...73	o. r.	o. r.
				24/60/6		–	0...87	o. r.	o. r.
				120/60/6		–	0...87	o. r.	o. r.
				240/60/6		–	0...87	o. r.	o. r.
				24/DC/5		0...58	0...58	o. r.	o. r.
				24/60/4		0...80	0...80	o. r.	o. r.
				120/60/4		0...80	0...80	o. r.	o. r.
				240/60/4		0...80	0...80	o. r.	o. r.

Circuit function	Port connection	Orifice	C _v value water ^{1.)}	Voltage/ Frequency/ Power	Maximum duty cycle	Pressure range ²⁾³⁾ (MAWP ⁴⁾)		Article no.	
						Ambient temperature 167 °F	Ambient temperature 131 °F	Brass body	Stainless steel body
		[mm]	[gal/min]	[V/Hz/W]		Air + water [psi]	Air + water [psi]	FKM seal	
CF D 3/2-way solenoid valve Direct-acting Normally open 	NPT 1/8	1.2	0.05	24/DC/5	100 % ED	0...145	0...145	o. r.	o. r.
				24/60/4		0...145	0...145	o. r.	o. r.
				120/60/4		0...145	0...145	o. r.	o. r.
				240/60/4		0...145	0...145	o. r.	o. r.
		1.6	0.07	24/DC/5	100 % ED	0...87	0...87	o. r.	o. r.
				24/60/4		0...87	0...87	o. r.	o. r.
				120/60/4		0...87	0...87	o. r.	o. r.
				240/60/4		0...87	0...87	o. r.	o. r.
		2.0 ^{5.)}	0.13	24/DC/6.5	100 % ED	–	0...116	o. r.	o. r.
				24/DC/5		0...87	0...87	o. r.	o. r.
				24/60/4		0...102	0...102	o. r.	o. r.
				120/60/4		0...102	0...102	o. r.	o. r.
				240/60/4		0...102	0...102	o. r.	o. r.
	Manifold (FK01)	1.2	0.05	24/DC/5	100 % ED	0...87	0...87	o. r.	o. r.
				24/DC/5.5		0...6	0...6	o. r.	o. r.
				24/60/4		0...87	0...87	o. r.	o. r.
				120/60/4		0...87	0...87	o. r.	o. r.
				240/60/4		0...87	0...87	o. r.	o. r.
		1.6	0.07	24/DC/5	100 % ED	0...87	0...87	o. r.	o. r.
				24/60/4		0...87	0...87	o. r.	o. r.
				120/60/4		0...87	0...87	o. r.	o. r.
				240/60/4		0...87	0...87	o. r.	o. r.
		2.0 ^{5.)}	0.13	24/DC/6.5	100 % ED	–	0...116	o. r.	o. r.
				24/DC/5		0...87	0...87	o. r.	o. r.
				24/60/4		0...102	0...102	o. r.	o. r.
				120/60/4		0...102	0...102	o. r.	o. r.
				240/60/4		0...102	0...102	o. r.	o. r.

o. r.: on request

1.) Measurement at +68 °F, 14.5²⁾ bar at the valve inlet and free outlet

2.) Pressure data: overpressure to atmospheric pressure and air as a medium

3.) Number of switching cycles under laboratory conditions (FKM seal, oiled air, unpressurised, DC): 5 million. Please note that an increase in switching pressure can limit the life of the seat seal.


4.) Maximum allowable working pressure


5.) Limited swelling compensation

Banjo version, coil UL Recognized (cURus)

Note:

- All valves are delivered without a cable plug.
- Coil size 24,5 mm [0.96 in]
- Orifices 1.6 mm and 2.0 mm on request.

Circuit function	Port connection	Orifice	Q _{Nn} value air	Voltage/Frequency/ Power	Maximum duty cycle	Medium pressure ¹⁾²⁾ (MAWP ³⁾)	Article no.
		[mm]	[gal/min]			Ambient temperature max. + 131 °F resp. 167 °F ⁴⁾ Air [psi]	
CF C 3/2-way solenoid valve Direct-acting Normally closed 	BJ01 P: G 1/8 A: G 1/8	1.2	9.2	24/DC/7	100 % ED	0...189	20077509 
				24/DC/5.5		0...167	20070693 
				24/50/4		0...189	20077511 
				230/50/4		0...189	20070709 
		1.6	12.7	24/DC/7	100 % ED	0...109	o. r.
				24/DC/5.5		0...87	o. r.
				24/50/4		0...109	o. r.
				230/50/4		0...109	o. r.
		2.0	19.8	24/DC/7	100 % ED	0...102	o. r.
				24/DC/5.5		0...80	o. r.
				24/50/4		0...87	o. r.
				230/50/4		0...87	o. r.
	BJ02 P: G 1/4 A: G 1/4	1.2	9.2	24/DC/7	100 % ED	0...189	20077512 
				24/DC/5.5		0...167	20077514 
				24/50/4		0...189	20077516 
				230/50/4		0...189	20077519 
		1.6	12.7	24/DC/7	100 % ED	0...109	o. r.
				24/DC/5.5		0...87	o. r.
				24/50/4		0...109	o. r.
				230/50/4		0...109	o. r.
		2.0	19.8	24/DC/7	100 % ED	0...102	o. r.
				24/DC/5.5		0...80	o. r.
				24/50/4		0...87	o. r.
				230/50/4		0...87	o. r.
	BJ03 P: NPT 1/4 A: G 1/8	1.2	9.2	24/DC/7	100 % ED	0...189	20077523 
				24/DC/5.5		0...167	20077564 
				24/50/4		0...189	20077570 
				230/50/4		0...189	20077574 
		1.6	12.7	24/DC/7	100 % ED	0...109	o. r.
				24/DC/5.5		0...87	o. r.
				24/50/4		0...109	o. r.
				230/50/4		0...109	o. r.
		2.0	19.8	24/DC/7	100 % ED	0...102	o. r.
				24/DC/5.5		0...80	o. r.
				24/50/4		0...87	o. r.
				230/50/4		0...87	o. r.

Circuit function	Port connection	Orifice	Q _{Nn} value air	Voltage/Frequency/ Power	Maximum duty cycle	Medium pressure ^{1.)2.)} (MAWP ^{3.)})	Article no.
						Ambient temperature max. +131 °F resp. 167 °F ^{4.)}	
		[mm]	[gal/min]	[V/Hz/W]		Air [psi]	FKM seal
CF C 3/2-way solenoid valve Direct-acting Normally closed 	BJ05 P: G ¼ A: G ⅝	1.2	9.2	24/DC/7	100 % ED	0...189	20077596
				24/DC/5.5		0...167	20077598
				24/50/4		0...189	20077604
				230/50/4		0...189	20077609
		1.6	12.7	24/DC/7	100% ED	0...109	o. r.
				24/DC/5.5		0...87	o. r.
				24/50/4		0...109	o. r.
				230/50/4		0...109	o. r.
		2.0	19.8	24/DC/7	100% ED	0...102	o. r.
				24/DC/5.5		0...80	o. r.
				24/50/4		0...87	o. r.
				230/50/4		0...87	o. r.
	BJ07 P: NPT ⅜ A: G ⅝	1.2	9.2	24/DC/7	100 % ED	0...189	20077610
				24/DC/5.5		0...167	20077615
				24/50/4		0...189	20077618
				230/50/4		0...189	20077626
		1.6	12.7	24/DC/7	100% ED	0...109	o. r.
				24/DC/5.5		0...87	o. r.
				24/50/4		0...109	o. r.
				230/50/4		0...109	o. r.
		2.0	19.8	24/DC/7	100% ED	0...102	o. r.
				24/DC/5.5		0...80	o. r.
				24/50/4		0...87	o. r.
				230/50/4		0...87	o. r.

o. r.: on request

1.) Pressure data: overpressure to atmospheric pressure and air as a medium

2.) Number of switching cycles under laboratory conditions (FKM seal, oiled air, unpressurised, DC): 5 million. Please note that an increase in switching pressure can limit the life of the seat seal.

3.) Depending on the performance level

4.) For P1: 6 bar [87 psi] absolute and P2: 5 bar [73 psi] absolute

Additional options

Note:

Available on request

Option	Variable Code	Description
Oxygen versions	NL02	Suitable for applications with oxygen (non-metal materials that are in contact with the medium are tested and approved according to BAM)
Increased purity requirements e.g. oil, grease and silicone-free	NL50/NL05	Wetted parts are specially cleaned and packaged in accordance with the valves
Increased tightness requirements	PC05	Leakage rate *less than 10 ⁻⁴ mbar l/sec
	PC08	Leakage rate *less than 10 ⁻⁵ mbar l/sec
	PC06	Leakage rate *less than 10 ⁻⁶ mbar l/sec
Vacuum version	on request	—

8.5. Ordering chart accessories

Single manifold

Note:

Further ordering information can be found in chapter “5.4. Single manifold” on page 13.

Multiple manifold

Note:

Further ordering information can be found in chapter “5.5. Multiple manifold” on page 14.

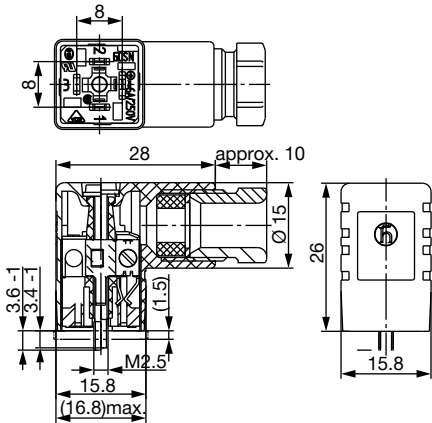
Accessories for manifolds

Accessory	Features	Article no.
Screw plug	With sealing ring, G 1/8	005041 
Cover plate	For unoccupied valve position	005100 

Cable plug Type 2516, form C according to DIN EN 175301 - 803

Note:

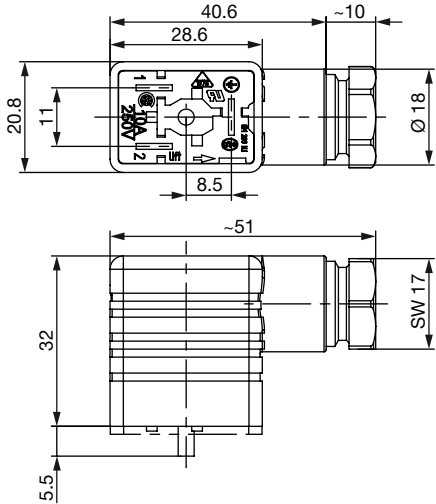
- Dimensions in mm
- Delivery of cable plug includes a flat seal and a fixing screw.
- For further versions see data sheet **Type 2516** 

Cable plug	Dimensions	Version	Voltage	Article no.
		Without circuitry	0...250 V AC/DC	303141 
		With LED	12...24 V AC/DC	303145 
		With LED and varistor	12...24 V AC/DC	303148 
		With rectifier, LED and varistor	12...24 V AC/DC	303142 

Cable plug Type 2507, form B according to industry standard

Note:

- Dimensions in mm
- Delivery of cable plug includes a flat seal and a fixing screw.
- Refer to data sheet **Type 2507** ▶ for more information about the cable plug.

Cable plug	Dimensions	Version	Voltage	Article no.
		Without circuitry (standard)	2...250 V AC/DC	423845 
		With LED	24 V AC/DC	423849 
		With LED and free-wheeling diode	12...24 V AC/DC	423851 
		With rectifier, LED and varistor	2...250 V AC/DC	423854 
			12...24 V AC/DC	423853 