
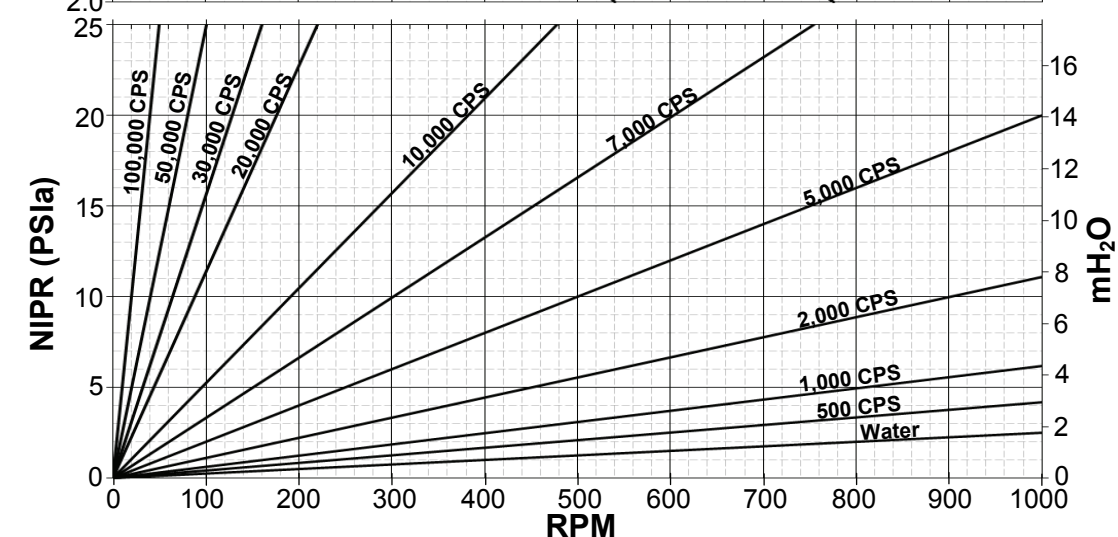
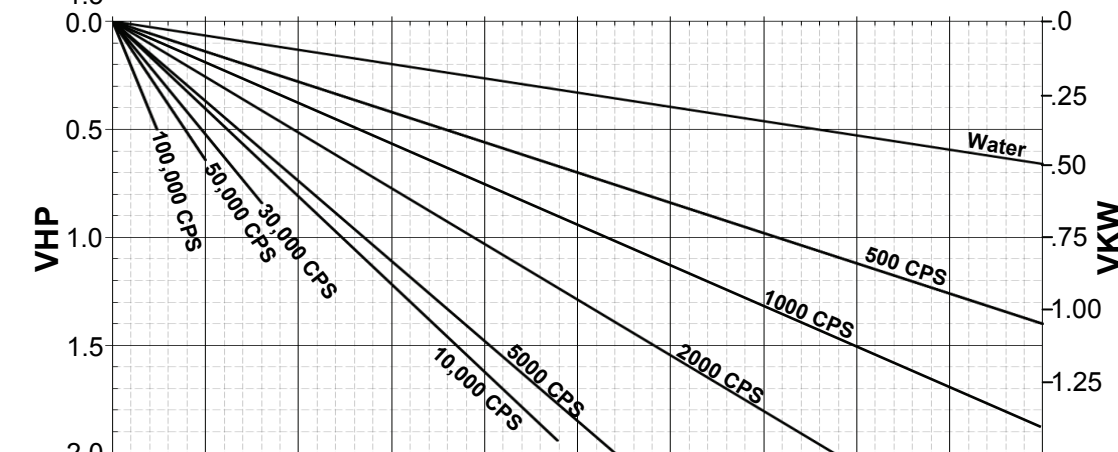
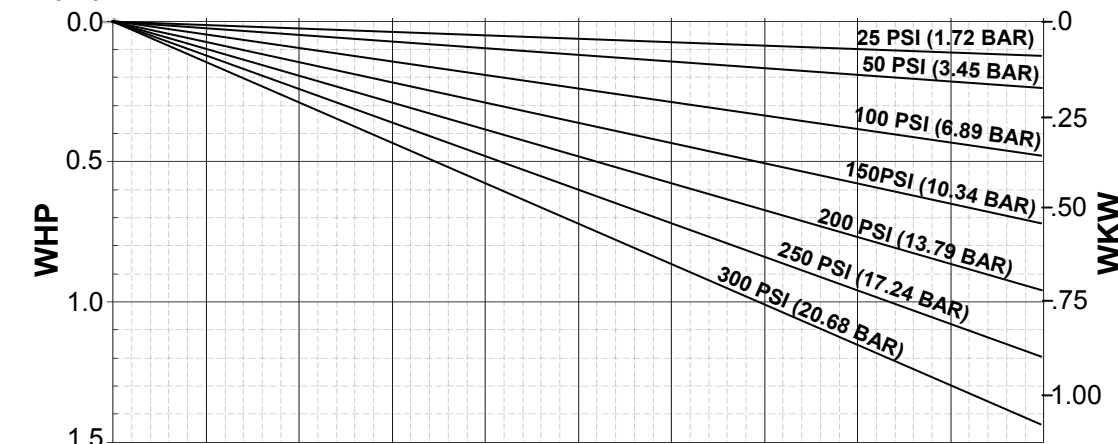


ZP2 Series Positive Displacement Pumps

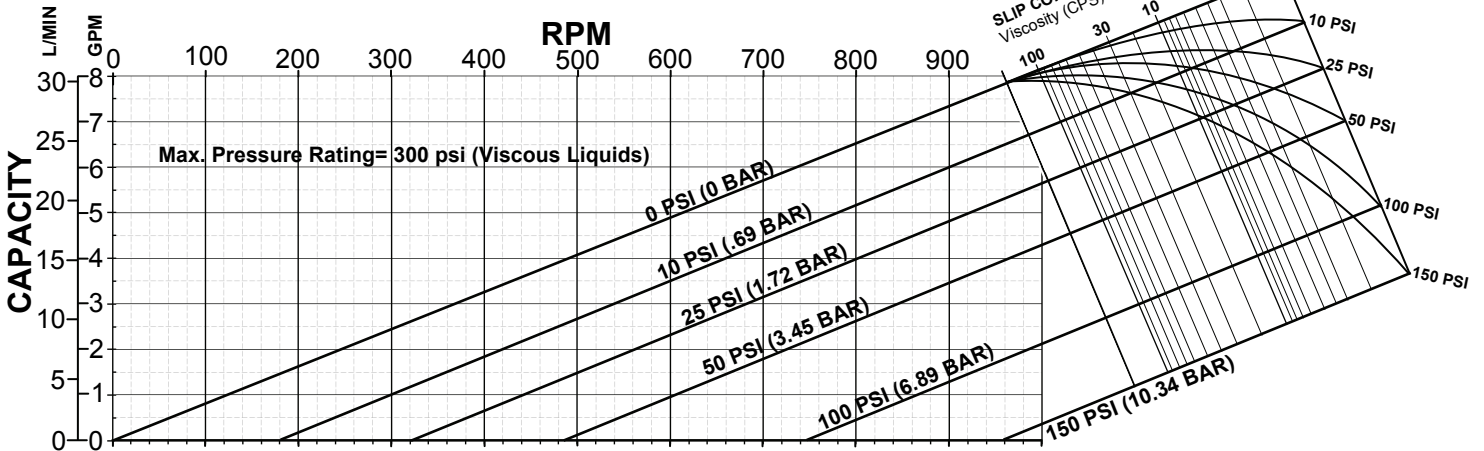

Ampco ZP2 Series Model: **ZP2-6**

Standard Clearances
Standard Port Size = 1.0"
Displacement =
0.0082 Gal/Rev
(0.031 L/Rev)

BHP = WHP + VHP

- Operating Specifications:
- 0-1000 RPM Range
 - 300 PSI (20.7 bar) Max. Pressure
 - Temperature Range
-40 °F (-40°C) to
300 °F (149°C)


Subject to change without notice

Ampco Pumps Company

2045 West Mill Road
Glendale, WI 53209 USA
Phone: (800) 737-8671
(414) 643-1852

Website:
www.ampcopumps.com

ZP2 Series Positive Displacement Pumps

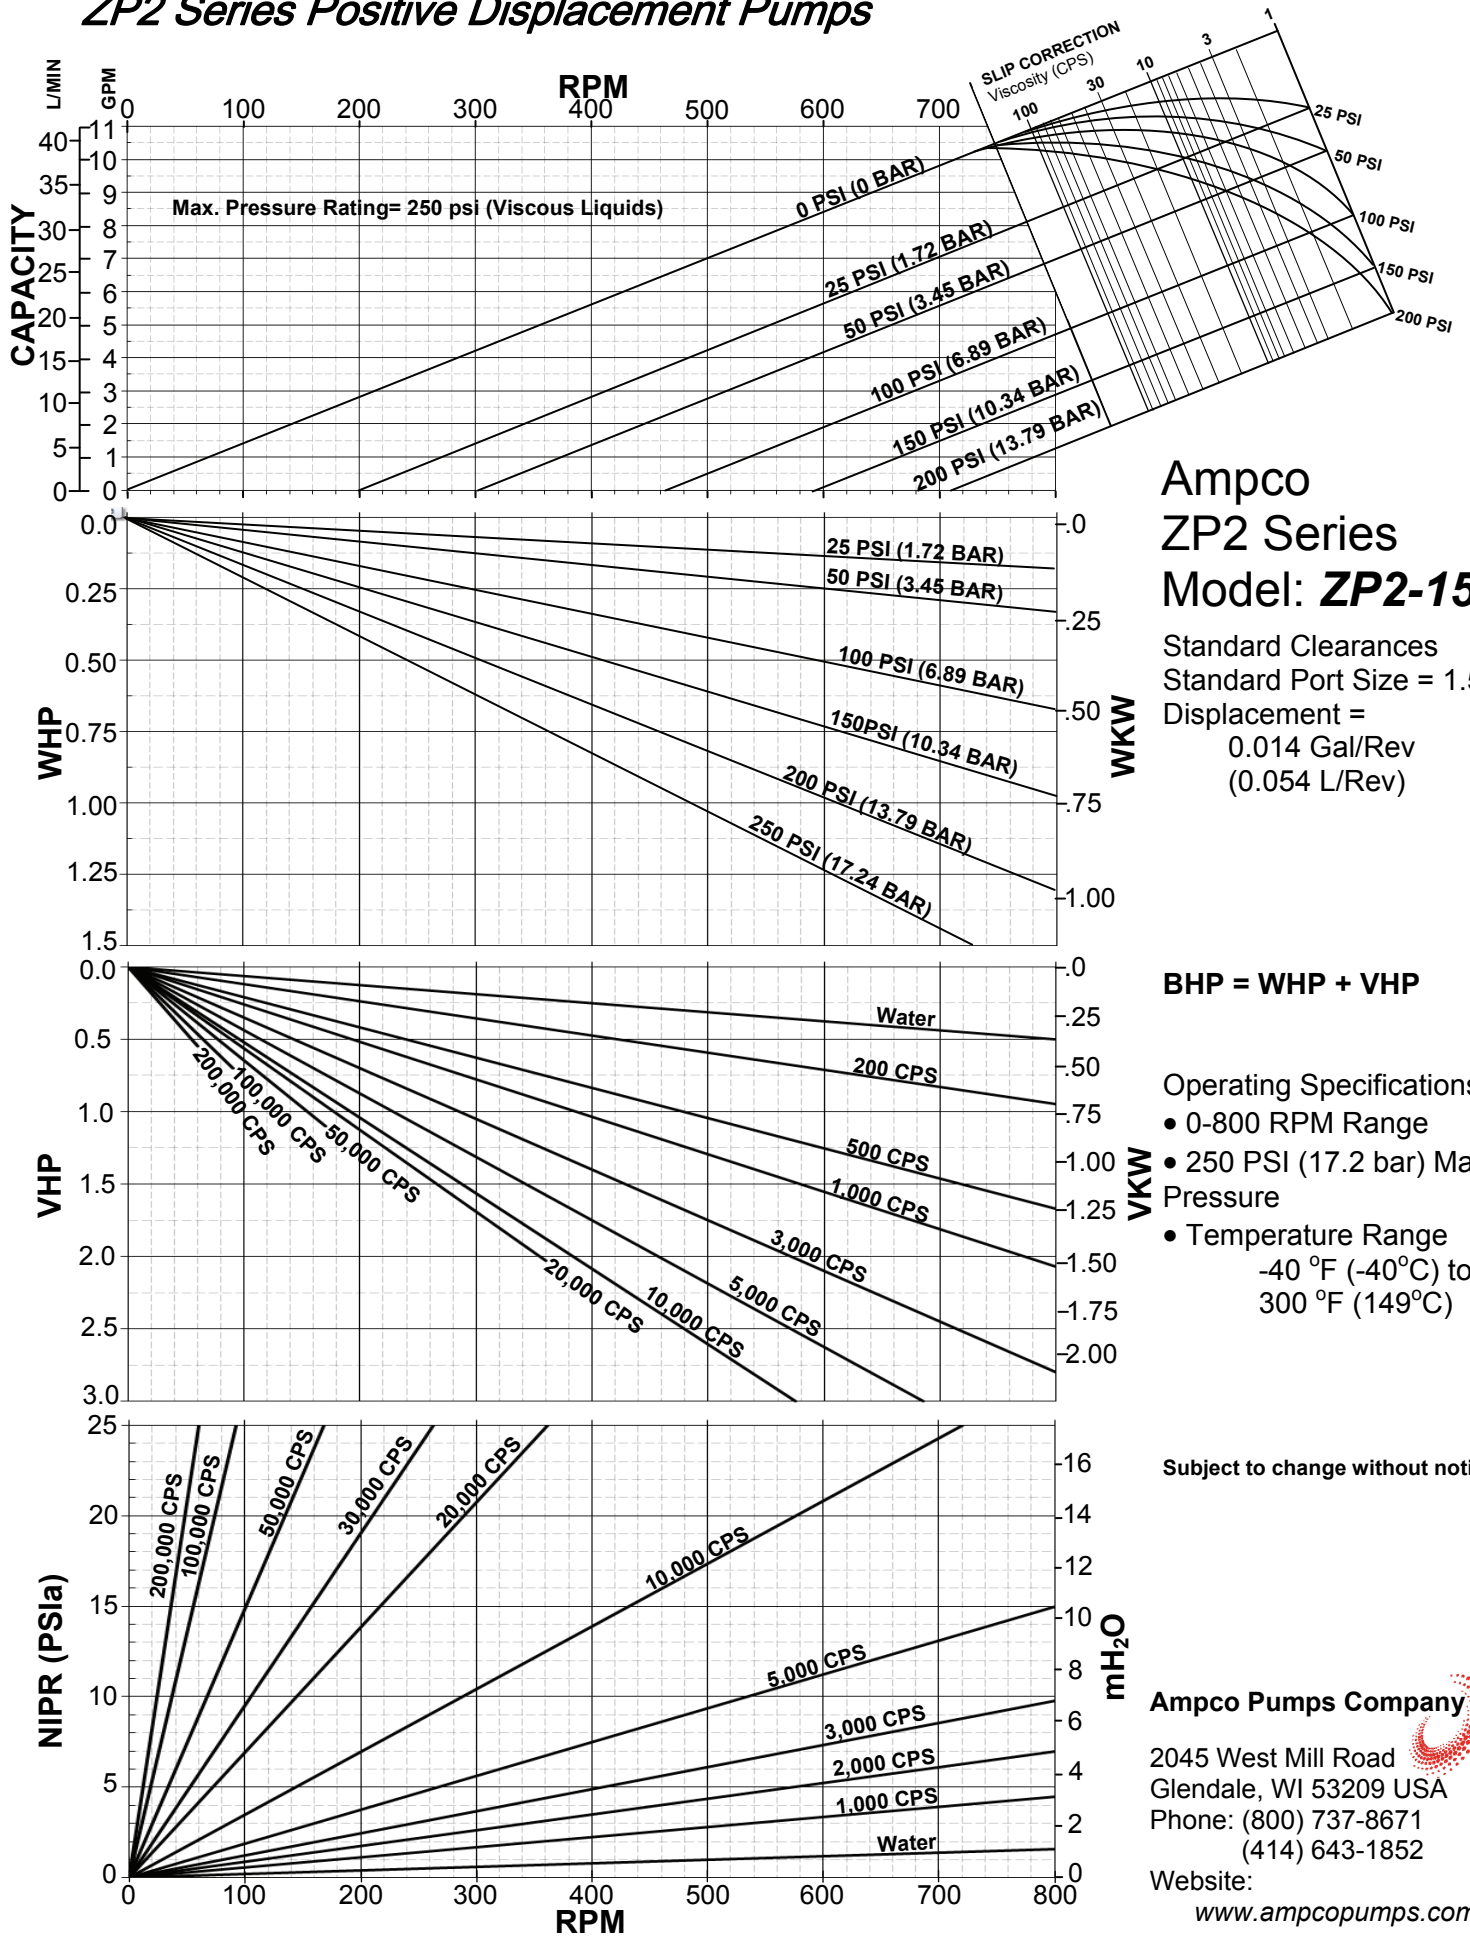

Ampco ZP2 Series Model: **ZP2-15**

Standard Clearances
Standard Port Size = 1.5"
Displacement =
0.014 Gal/Rev
(0.054 L/Rev)

BHP = WHP + VHP

- Operating Specifications:
- 0-800 RPM Range
 - 250 PSI (17.2 bar) Max. Pressure
 - Temperature Range
-40 °F (-40°C) to
300 °F (149°C)


Subject to change without notice

Ampco Pumps Company

2045 West Mill Road
Glendale, WI 53209 USA
Phone: (800) 737-8671
(414) 643-1852


Website:
www.ampcopumps.com

ZP2 Series Positive Displacement Pumps

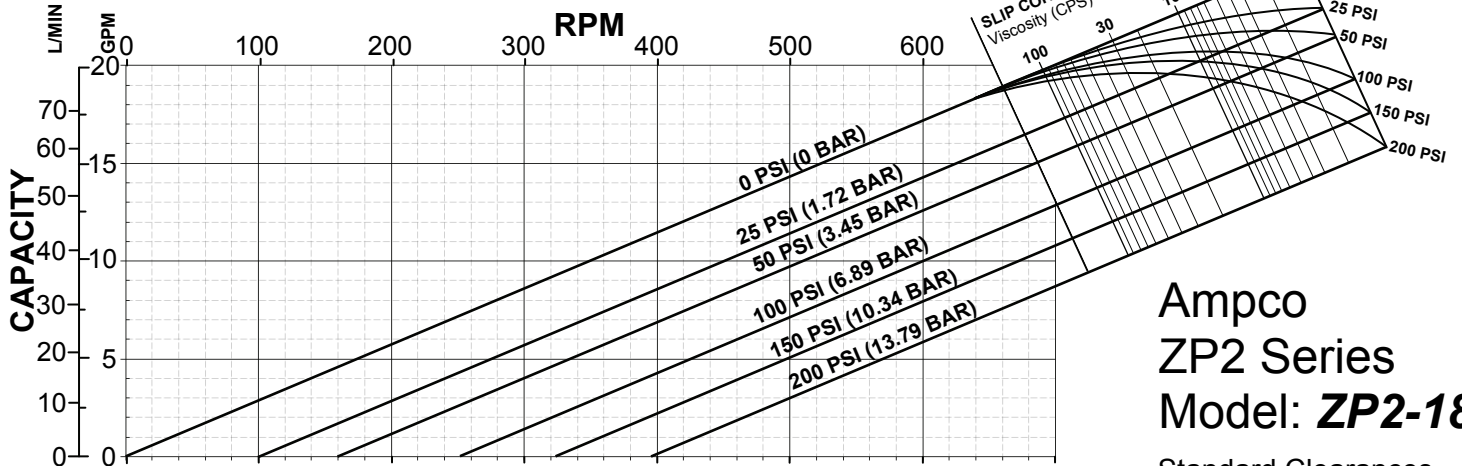


Ampco ZP2 Series Model: **ZP2-18**

Standard Clearances
Standard Port Size = 1.5"
Displacement =
0.029 Gal/Rev
(0.108 L/Rev)

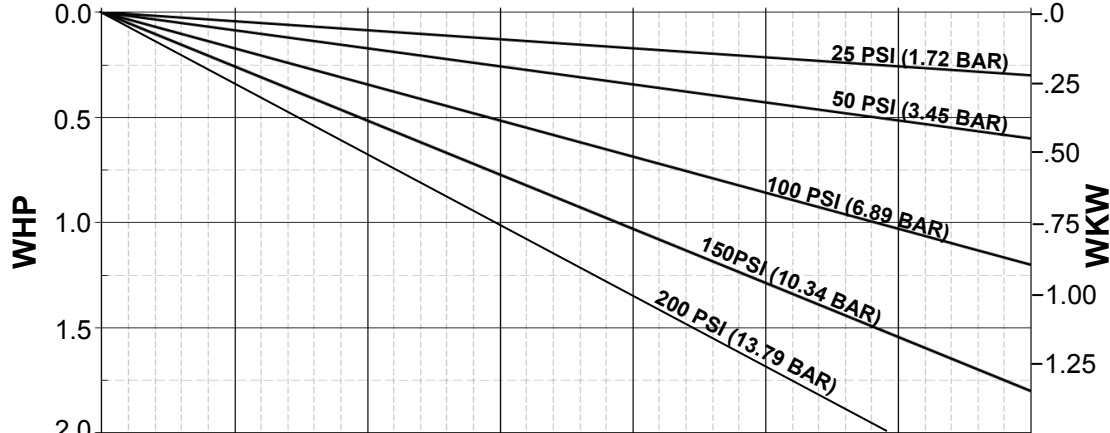


BHP = WHP + VHP

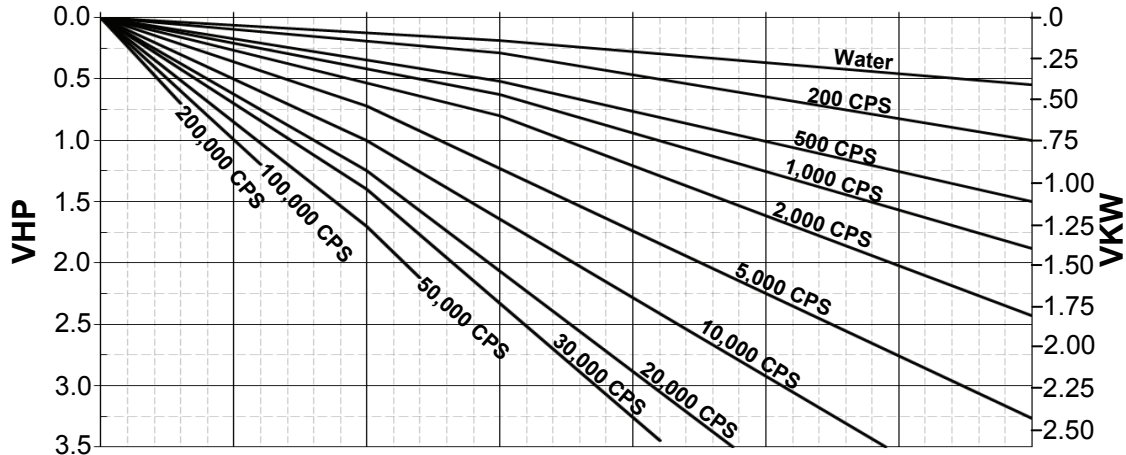

- Operating Specifications:
- 0-700 RPM Range
 - 200 PSI (13.8 bar) Max. Pressure
 - Temperature Range
-40 °F (-40°C) to
300 °F (149°C)

Subject to change without notice

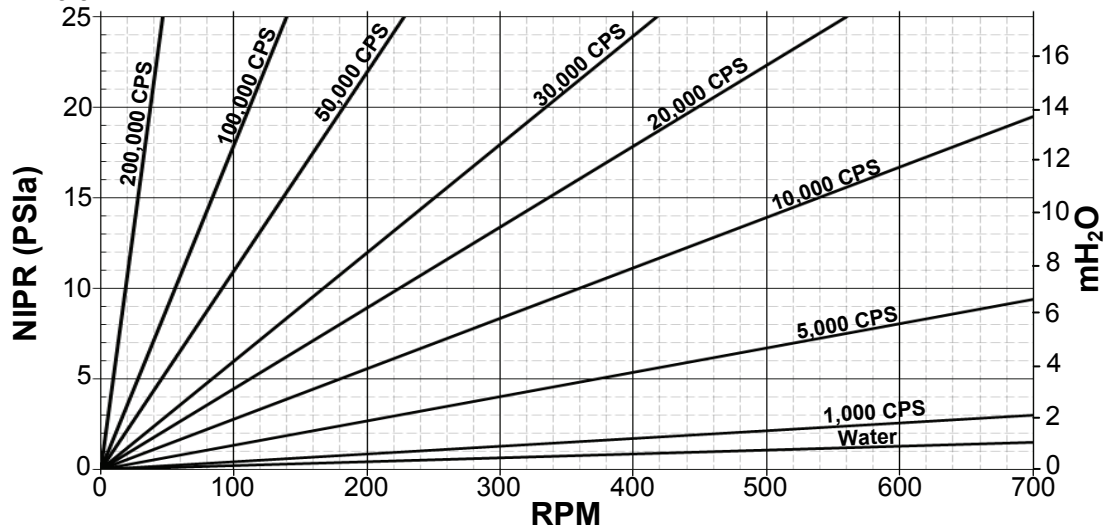


Ampco Pumps Company

2045 West Mill Road
Glendale, WI 53209 USA
Phone: (800) 737-8671
(414) 643-1852


Website:
www.ampcopumps.com

ZP2 Series Positive Displacement Pumps

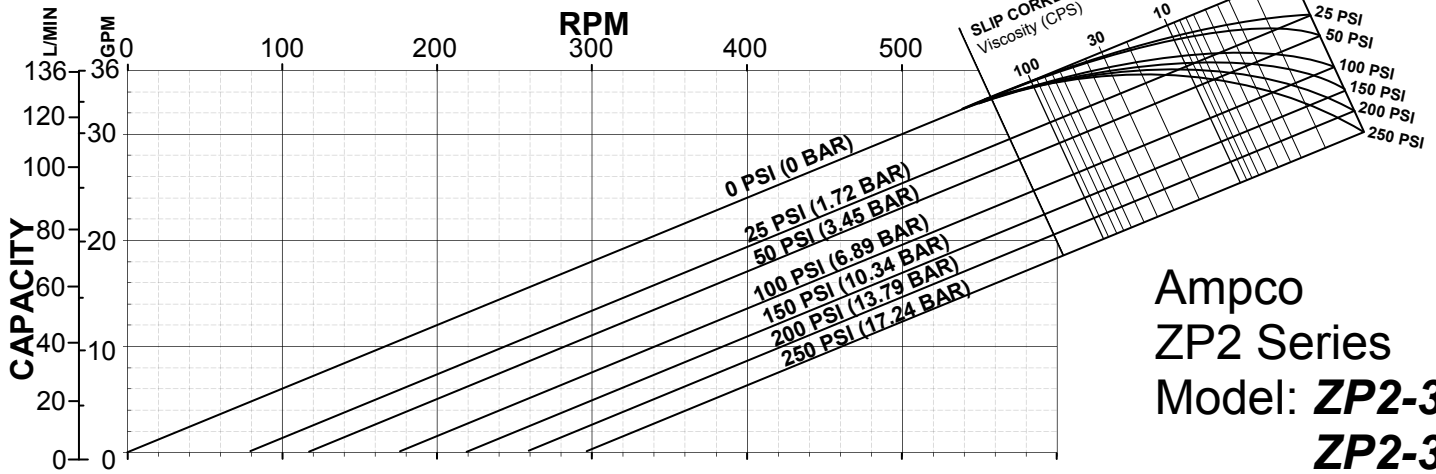


Ampco
ZP2 Series
Model: ZP2-30
ZP2-34

Standard Clearances
Standard Port Size = 1.5"
Displacement =
0.060 Gal/Rev
(0.227 L/Rev)

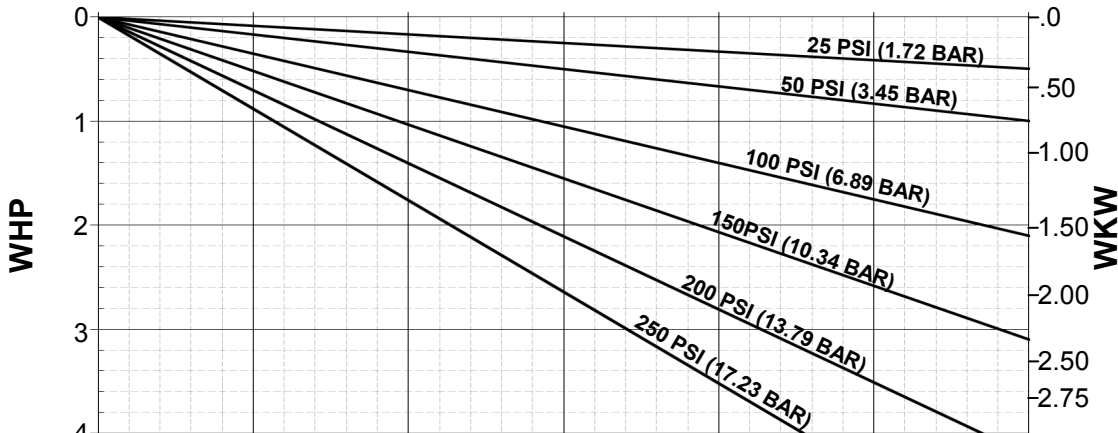


BHP = WHP + VHP

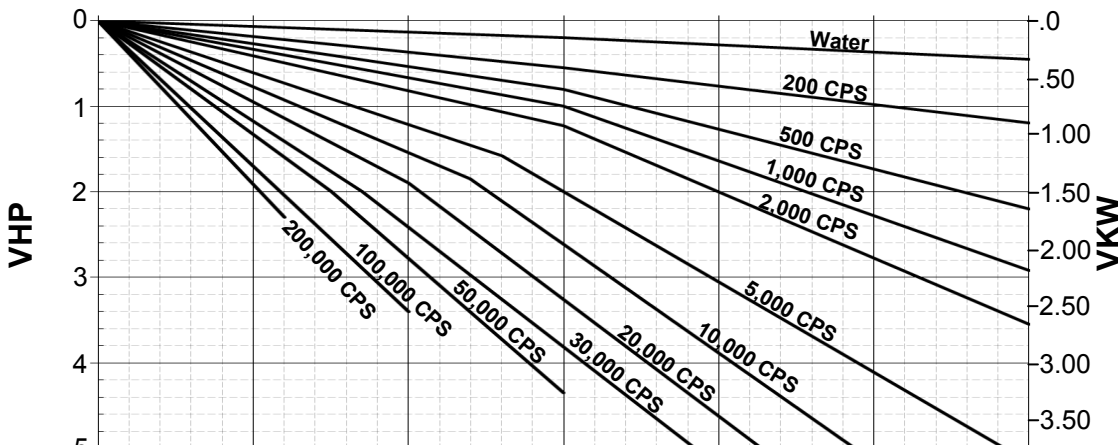

- Operating Specifications:
- 0-600 RPM Range
 - 250 PSI (17.2 bar) Max. Pressure
 - Temperature Range
-40 °F (-40°C) to
300 °F (149°C)

Subject to change without notice


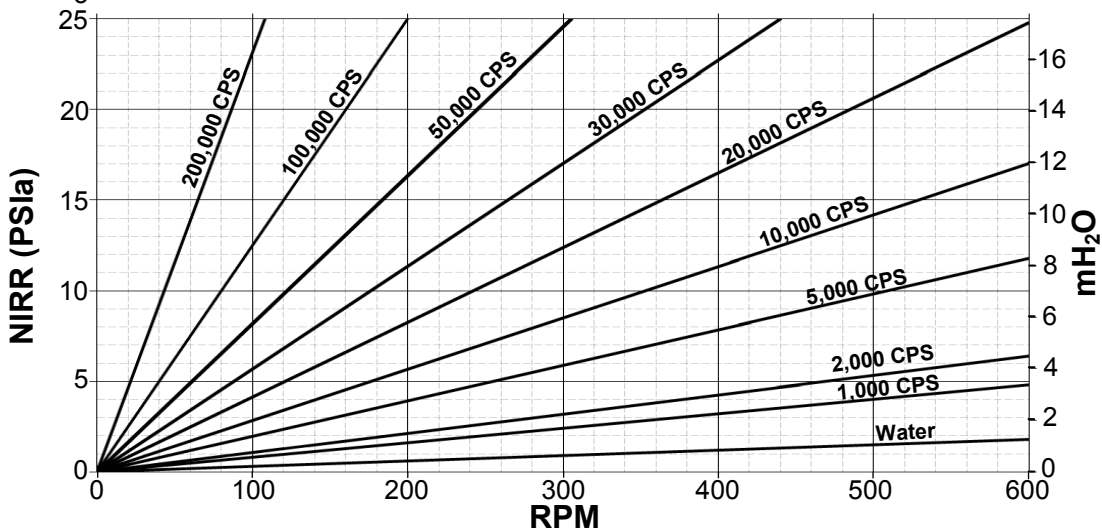


Ampco Pumps Company

2045 West Mill Road
Glendale, WI 53209 USA
Phone: (800) 737-8671
(414) 643-1852


Website:
www.ampcopumps.com

ZP Series Positive Displacement Pumps

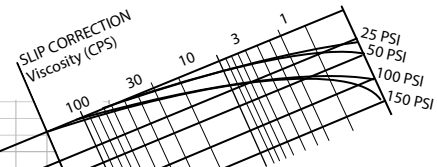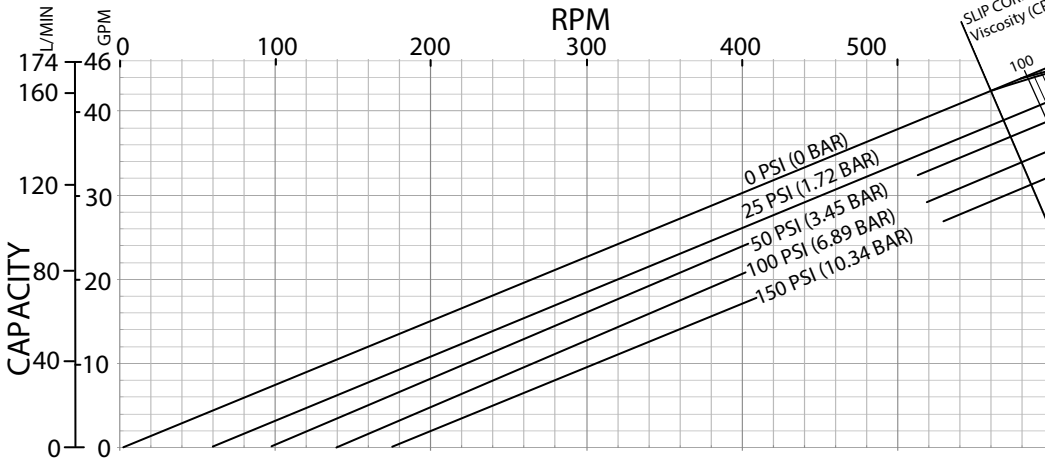


Ampco ZP2 Series Model: **ZP2-40**

Standard Clearances
Standard Port Size = 2.0"
Displacement =
0.076Gal/Rev
(0.288 L/Rev)

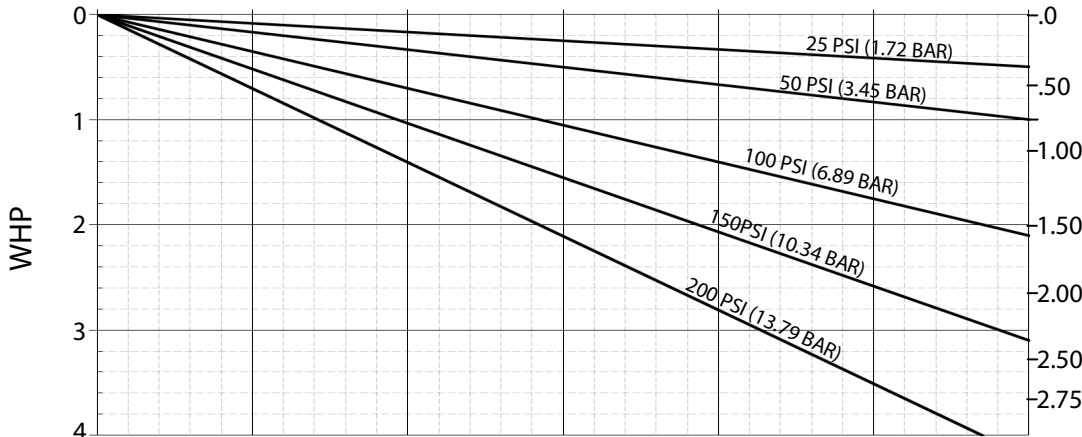


BHP = WHP + VHP

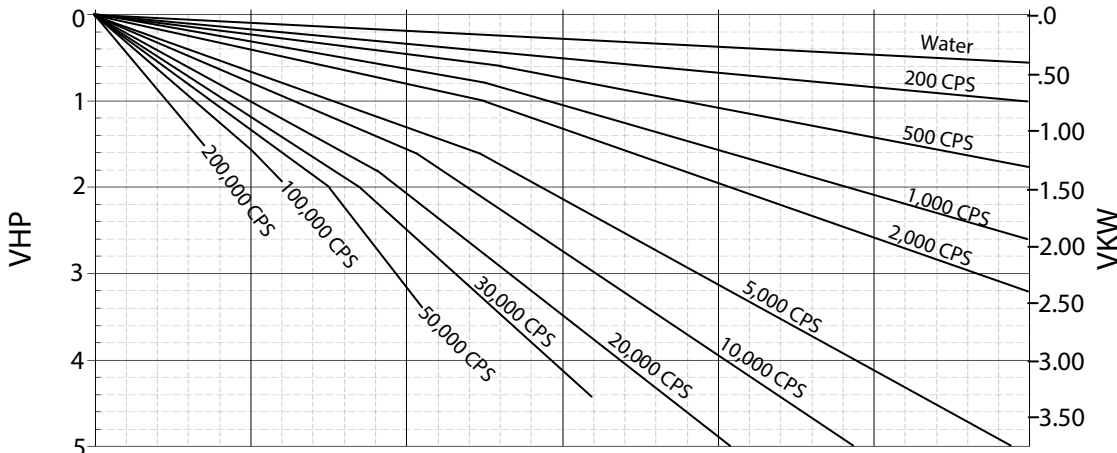

Operating Specifications:
0-600 RPM Range
150 PSI (10.3 bar) Max. Pressure
Temperature Range
-40 °F (-40°C) to
300 °F (149 °C)

Subject to change without notice

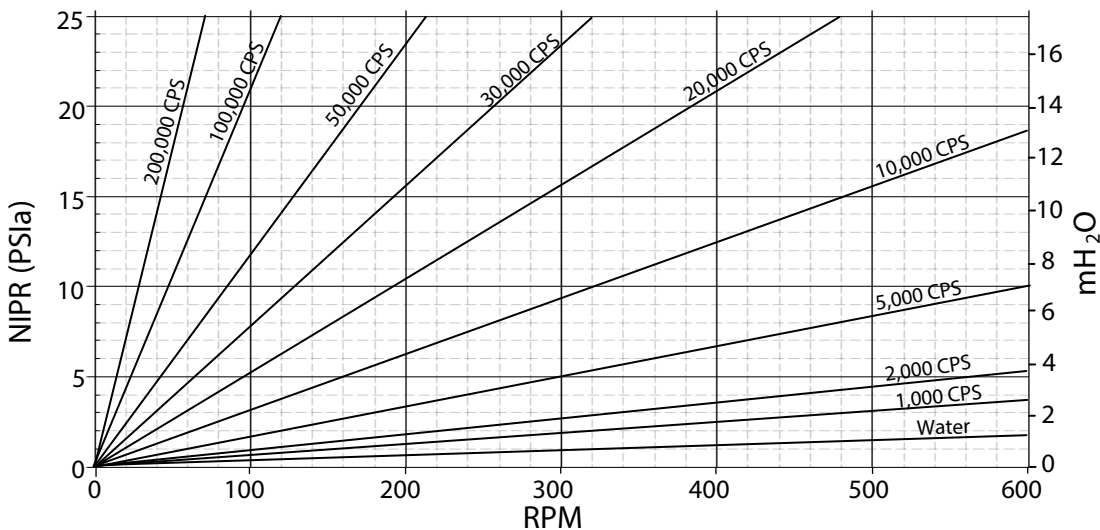


Ampco Pumps Company

2045 West Mill Road
Glendale, WI 53209 USA
Phone: (800) 737 -8671
(414) 643 -1852

Website:
www.ampcopumps.com




ZP2 Series Positive Displacement Pumps

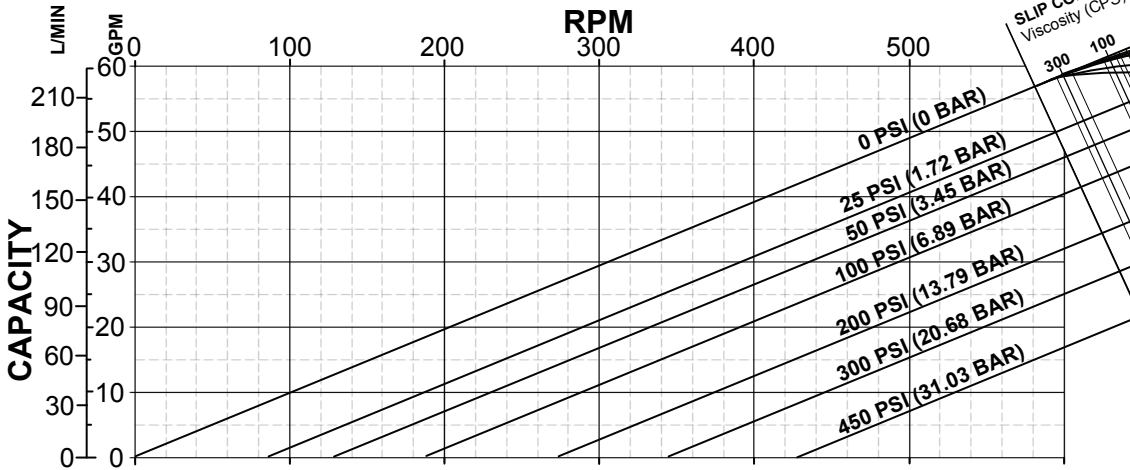


Ampco ZP2 Series Model: **ZP2-45**

Standard Clearances
Standard Port Size = 2.0"
Displacement =
0.098 Gal/Rev
(0.371 L/Rev)

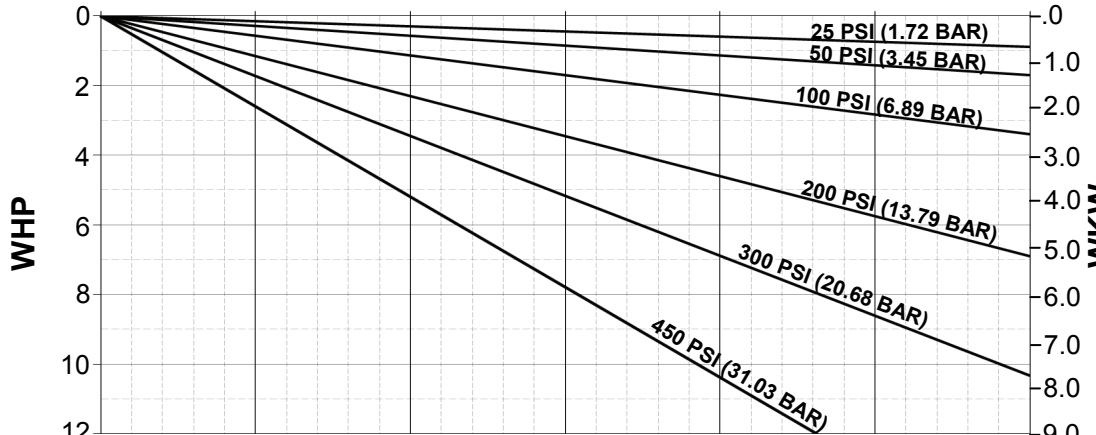


BHP = WHP + VHP

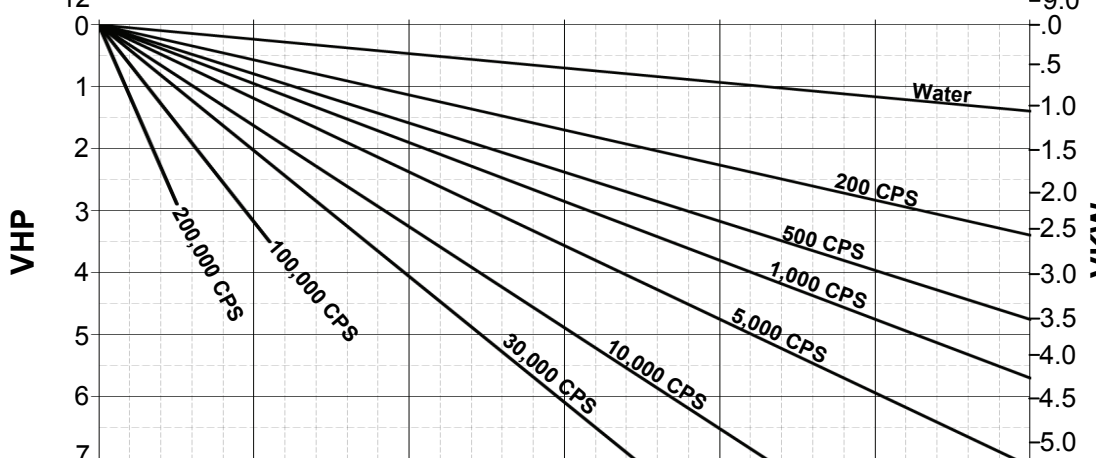

Operating Specifications:

- 0-600 RPM Range
- 450 PSI (31.0 bar) Max. Pressure
- Temperature Range
-40 °F (-40°C) to
300 °F (149°C)

Subject to change without notice


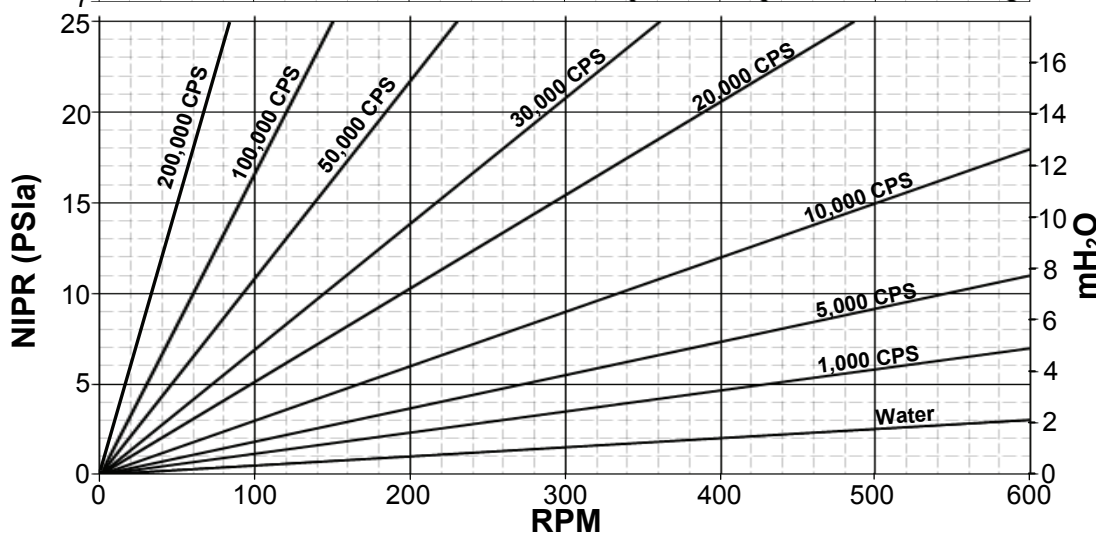


Ampco Pumps Company

2045 West Mill Road
Glendale, WI 53209 USA
Phone: (800) 737-8671
(414) 643-1852


Website:
www.ampcopumps.com

ZP2 Series Positive Displacement Pumps

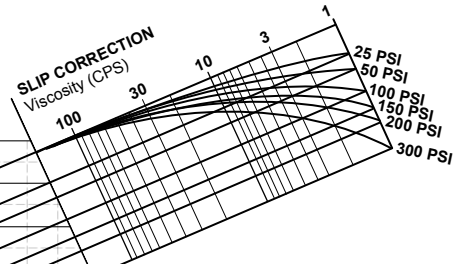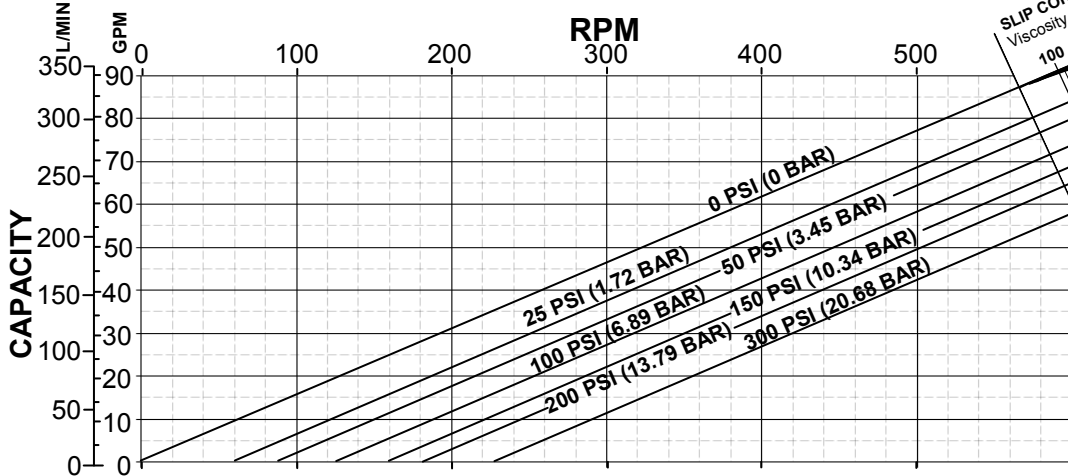


Ampco ZP2 Series Model: **ZP2-60** **ZP2-64**

Standard Clearances
Standard Port Size = 2.5"
Displacement =
0.153 Gal/Rev
(0.579 L/Rev)

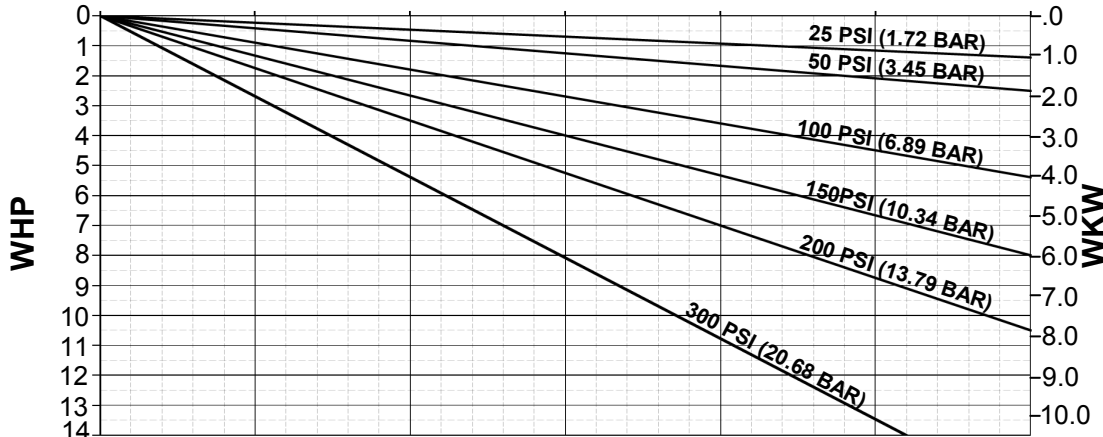


BHP = WHP + VHP

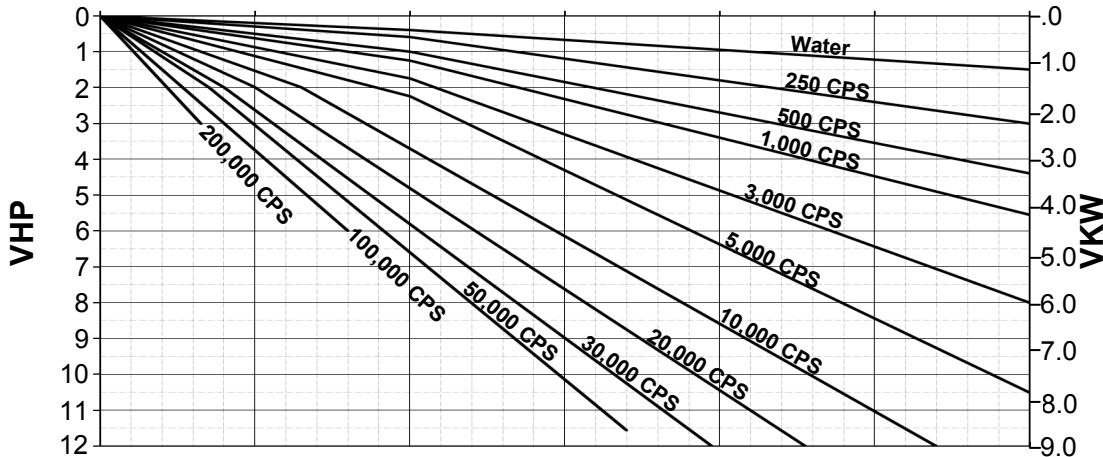

- Operating Specifications:
- 0-600 RPM Range
 - 300 PSI (20.7 bar) Max. Pressure
 - Temperature Range
-40 °F (-40°C) to
300 °F (149°C)

Subject to change without notice

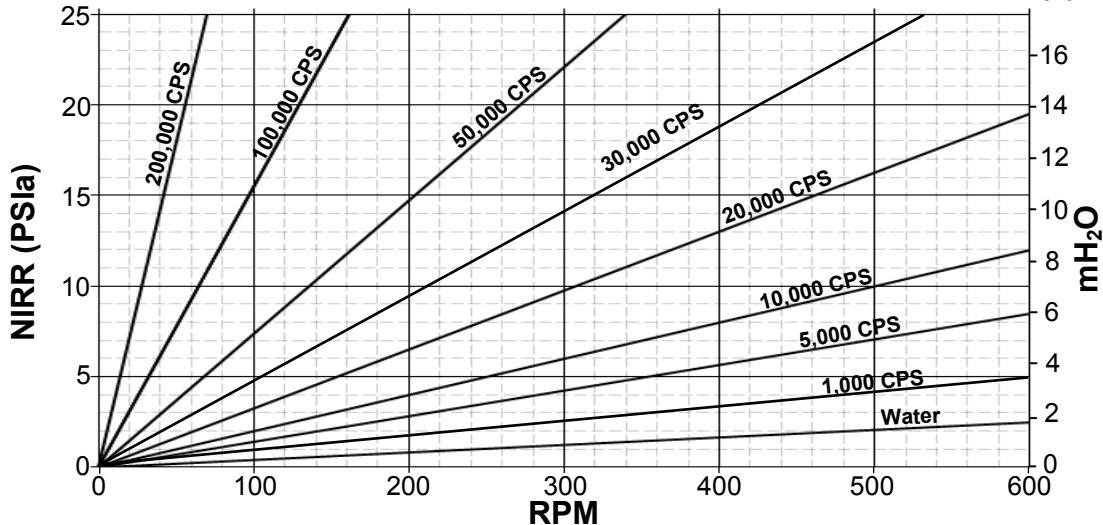


Ampco Pumps Company

2045 West Mill Road
Glendale, WI 53209 USA
Phone: (800) 737-8671
(414) 643-1852


Website:
www.ampcopumps.com

ZP2 Series Positive Displacement Pumps

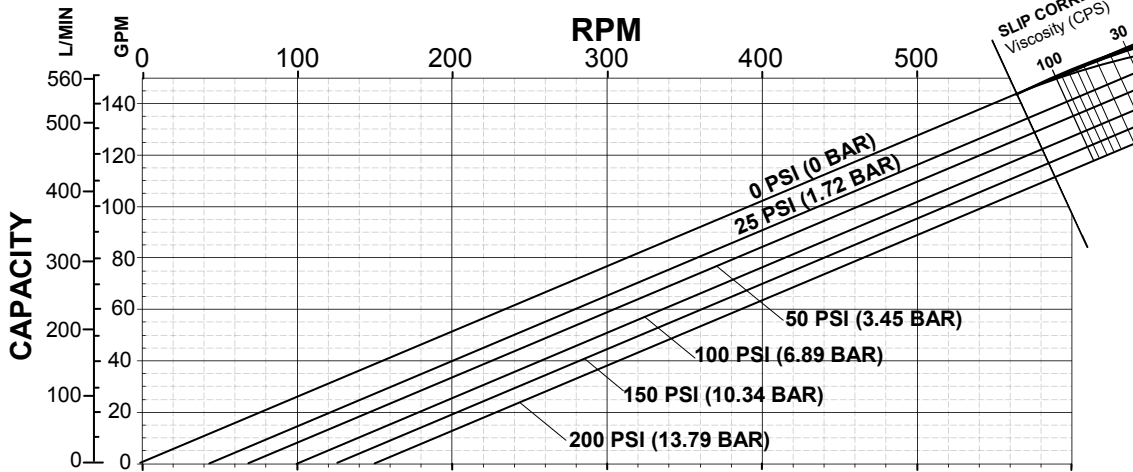


Ampco
ZP2 Series
Model: **ZP2-130**
ZP2-134

Standard Clearances
Standard Port Size = 3.0"
Displacement =
0.253 Gal/Rev
(0.958 L/Rev)

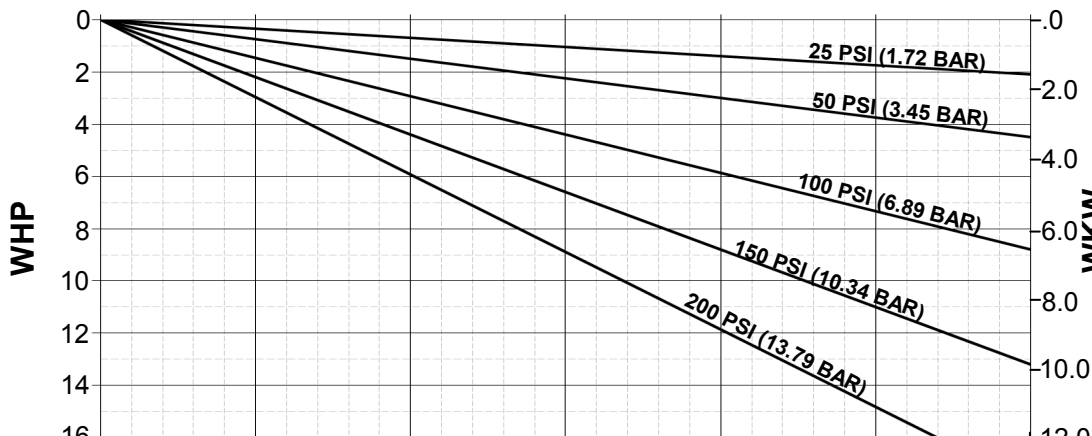


BHP = WHP + VHP

- Operating Specifications:
- 0-600 RPM Range
 - 200 PSI (13.8 bar) Max. Pressure
 - Temperature Range
-40 °F (-40°C) to
300 °F (149°C)

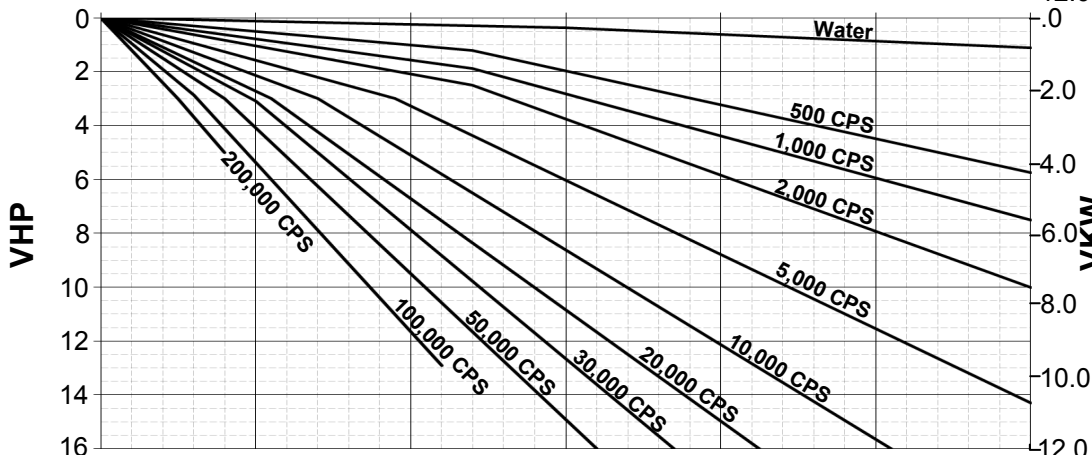

Subject to change without notice

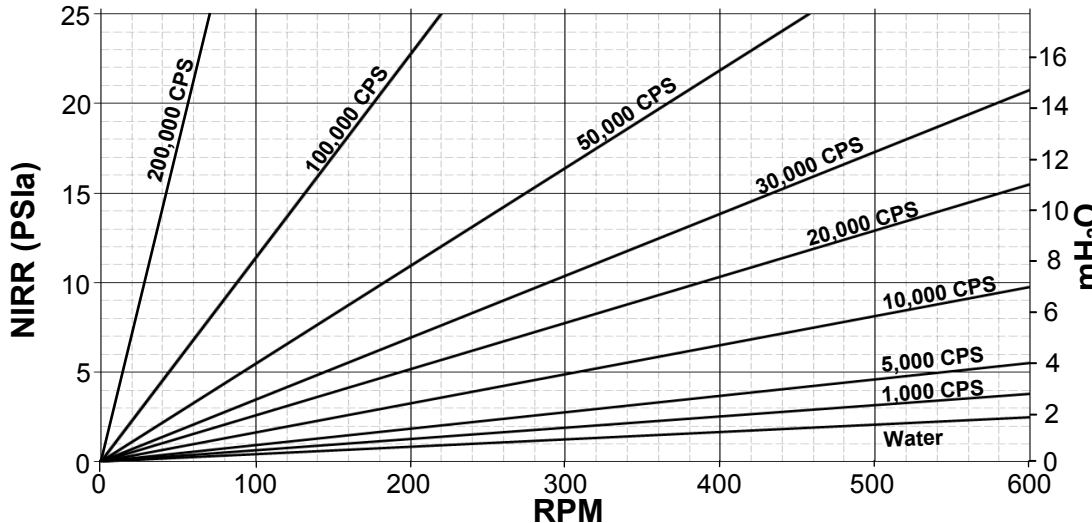


Ampco Pumps Company

2045 West Mill Road
Glendale, WI 53209 USA
Phone: (800) 737-8671
(414) 643-1852


Website:
www.ampcopumps.com

ZP2 Series Positive Displacement Pumps

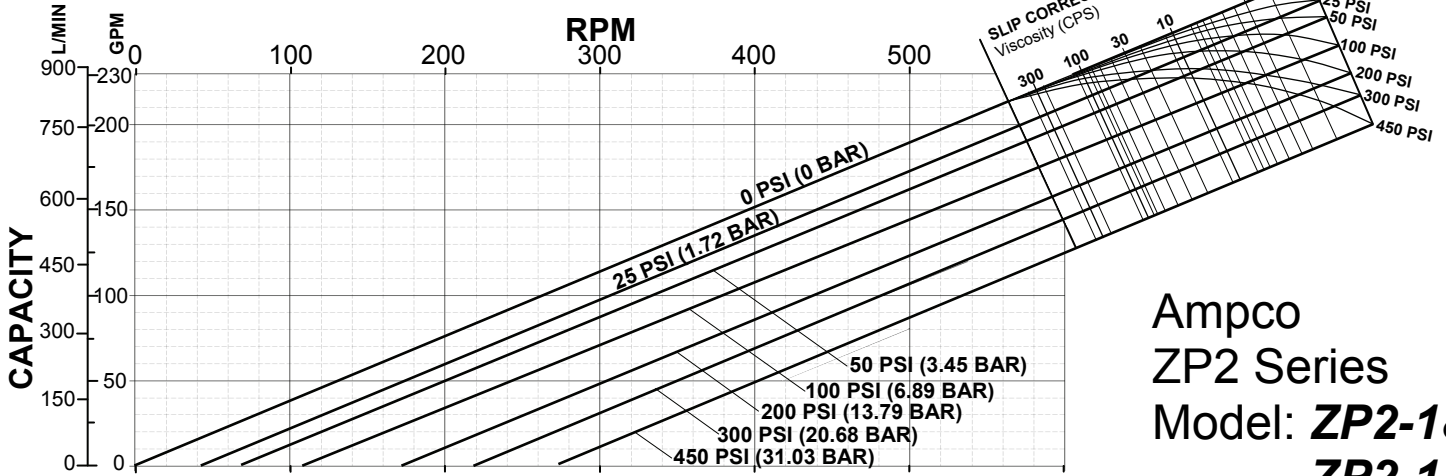

Ampco ZP2 Series Model: **ZP2-180** **ZP2-184**


Standard Clearances
Standard Port Size = 3.0"
Displacement =
0.380 Gal/Rev
(1.438 L/Rev)

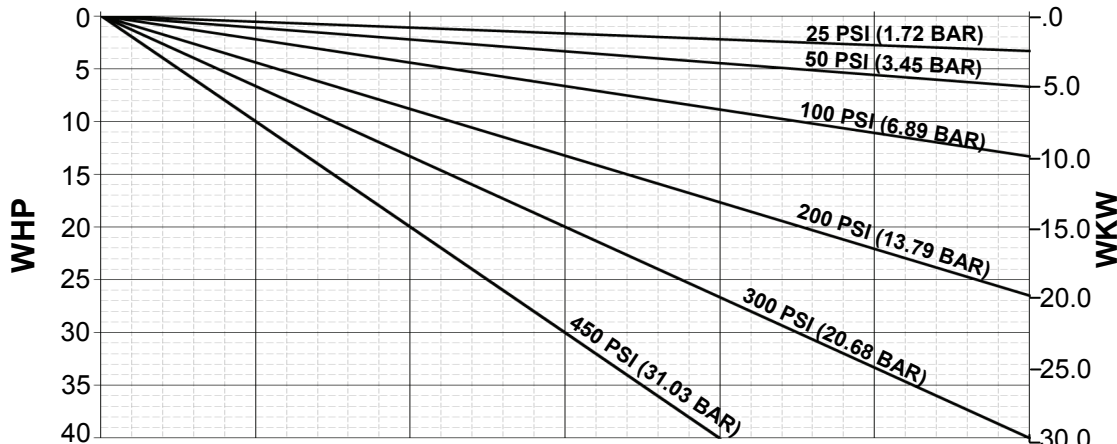


BHP = WHP + VHP

Operating Specifications:

- 0-600 RPM Range
- 450 PSI (31.0 bar) Max. Pressure
- Temperature Range
-40 °F (-40°C) to
300 °F (149°C)

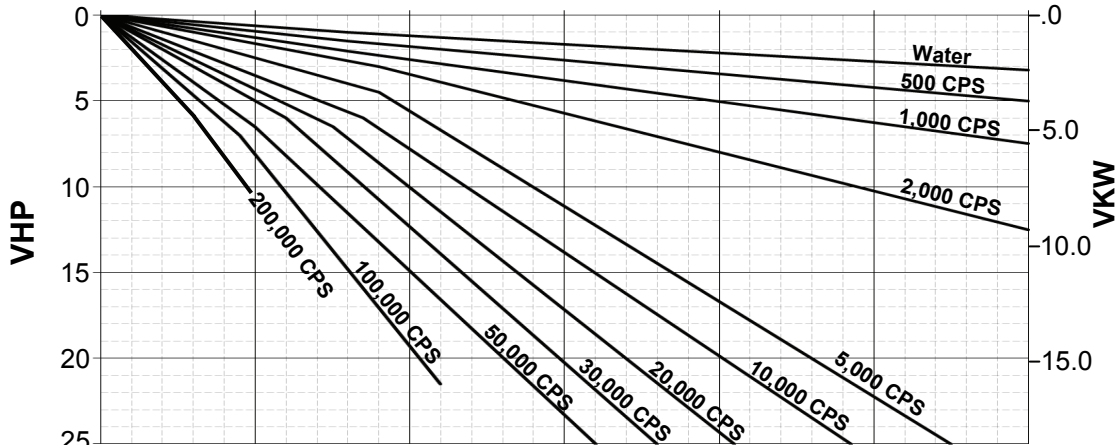

Subject to change without notice

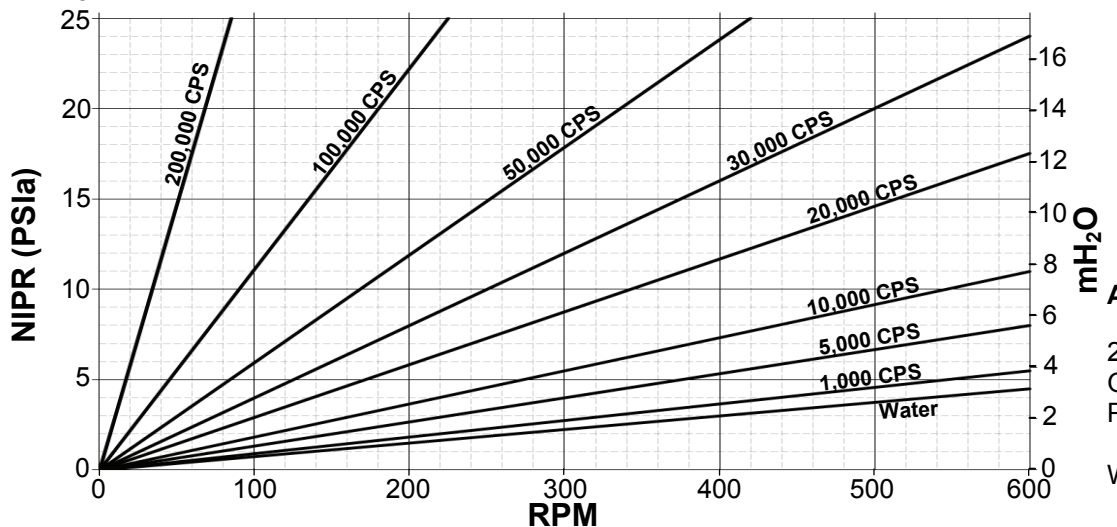


Ampco Pumps Company

2045 West Mill Road
Glendale, WI 53209 USA
Phone: (800) 737-8671
(414) 643-1852


Website:
www.ampcopumps.com

ZP2 Series Positive Displacement Pumps

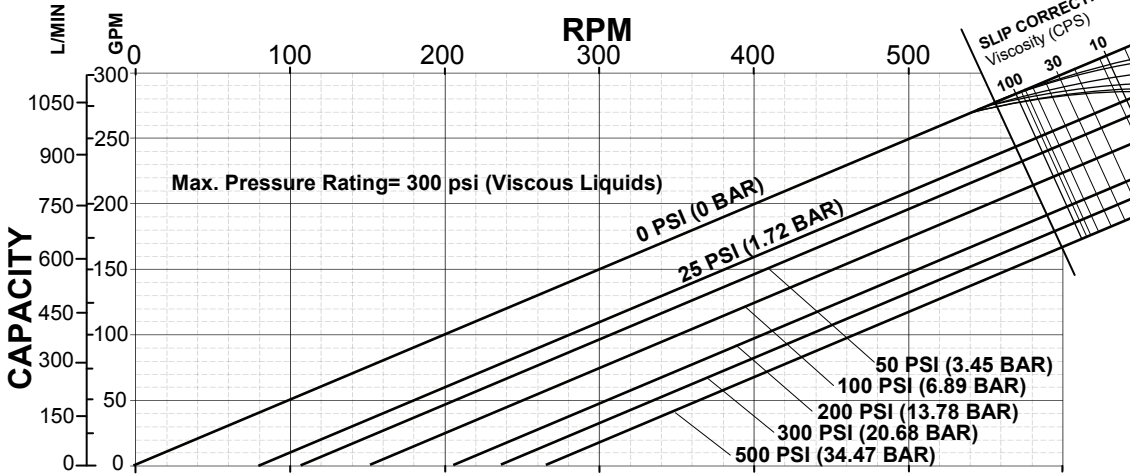


Ampco ZP2 Series Model: **ZP2-210**


Standard Clearances
Standard Port Size = 4.0"
Displacement =
0.502 Gal/Rev
(1.900 L/Rev)

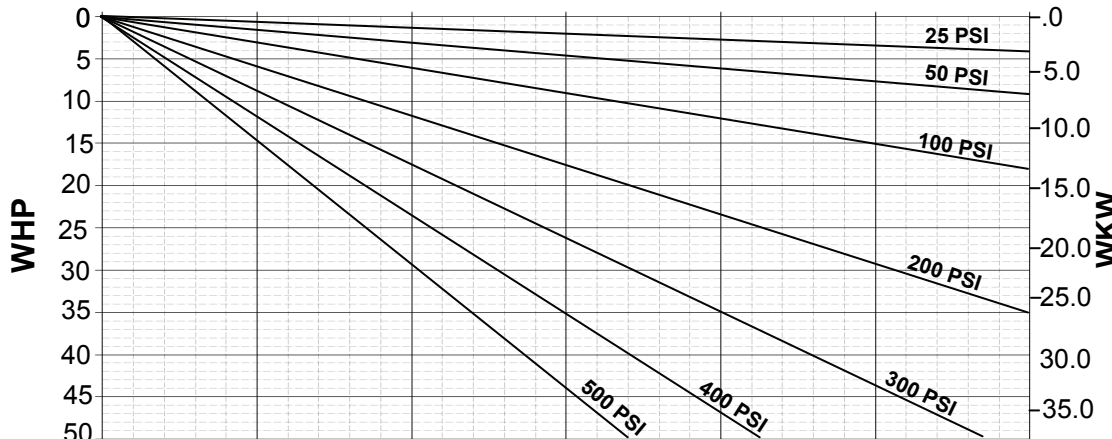

BHP = WHP + VHP

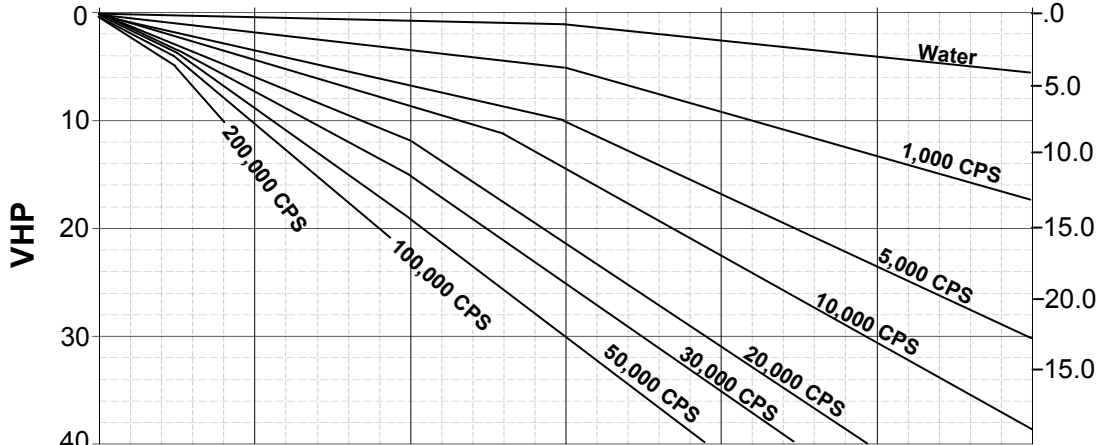

- Operating Specifications:
- 0-600 RPM Range
 - 500 PSI (34.48 bar) Max. Pressure
 - Temperature Range
-40 °F (-40°C) to
300 °F (149°C)

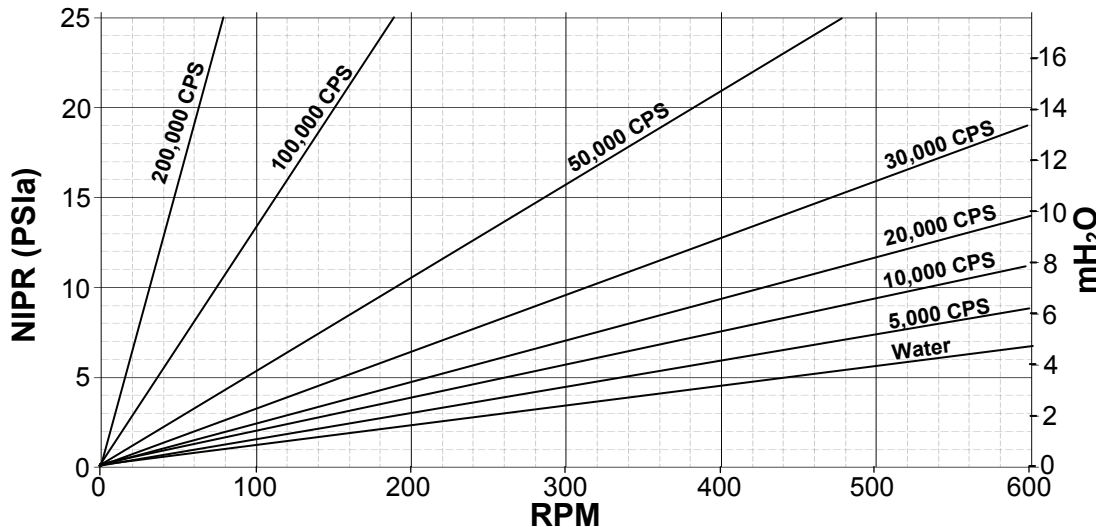


Subject to change without notice

Ampco Pumps Company

2045 West Mill Road
Glendale, WI 53209 USA
Phone: (800) 737-8671
(414) 643-1852


Website:
www.ampcopumps.com

ZP2 Series Positive Displacement Pumps

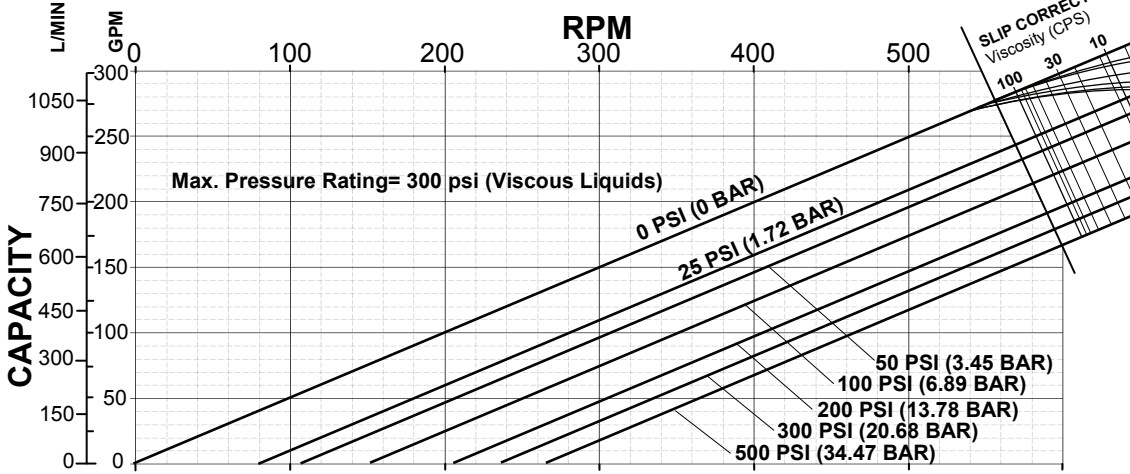


Ampco ZP2 Series Model: **ZP2-214**


Standard Clearances
Standard Port Size = 4.0"
Displacement =
0.502 Gal/Rev
(1.900 L/Rev)

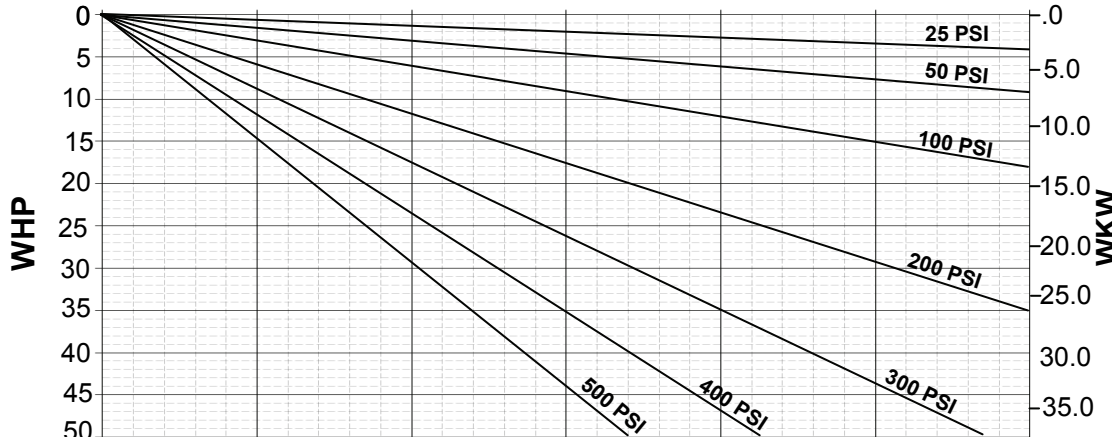

BHP = WHP + VHP

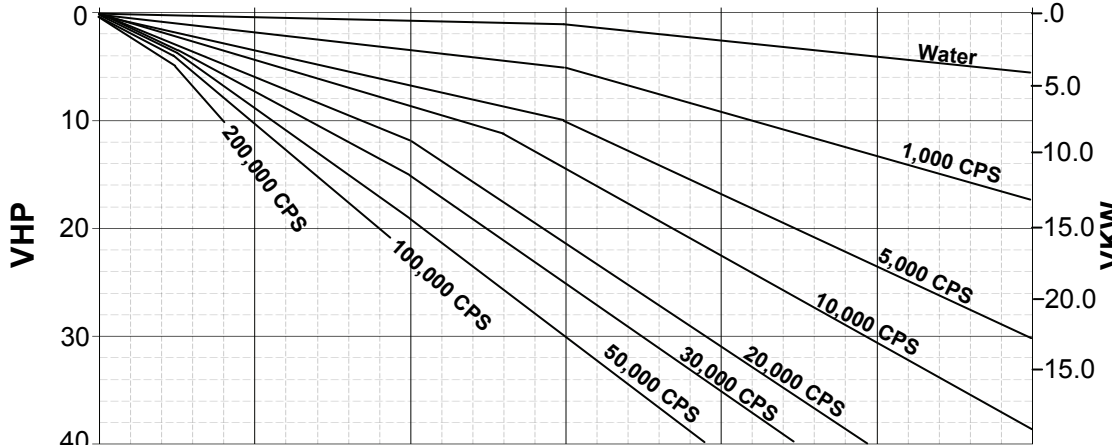

- Operating Specifications:
- 0-600 RPM Range
 - 500 PSI (34.48 bar) Max. Pressure
 - Temperature Range
-40 °F (-40°C) to
300 °F (149°C)

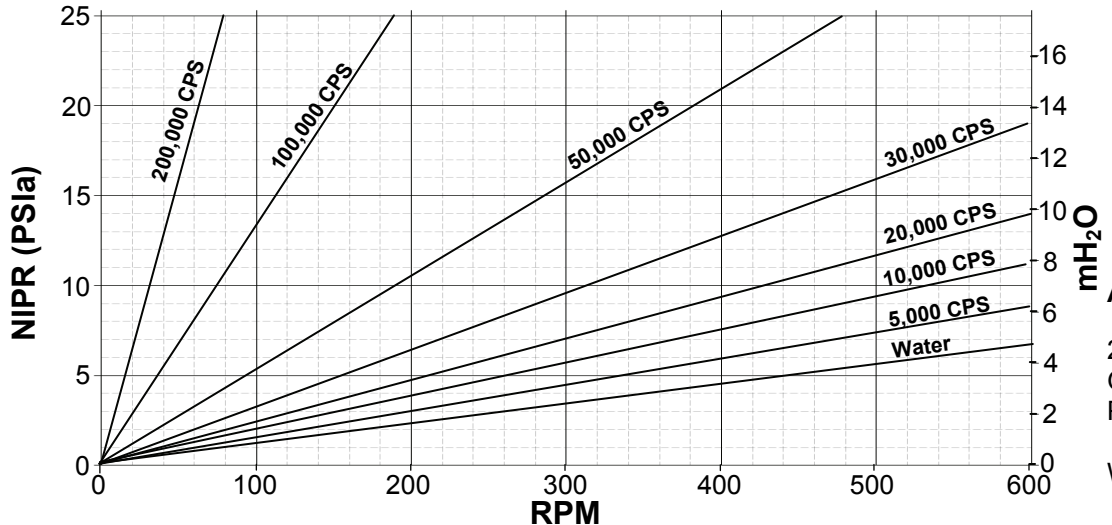


Subject to change without notice

Ampco Pumps Company

2045 West Mill Road
Glendale, WI 53209 USA
Phone: (800) 737-8671
(414) 643-1852


Website:
www.ampcopumps.com

ZP2 Series Positive Displacement Pumps

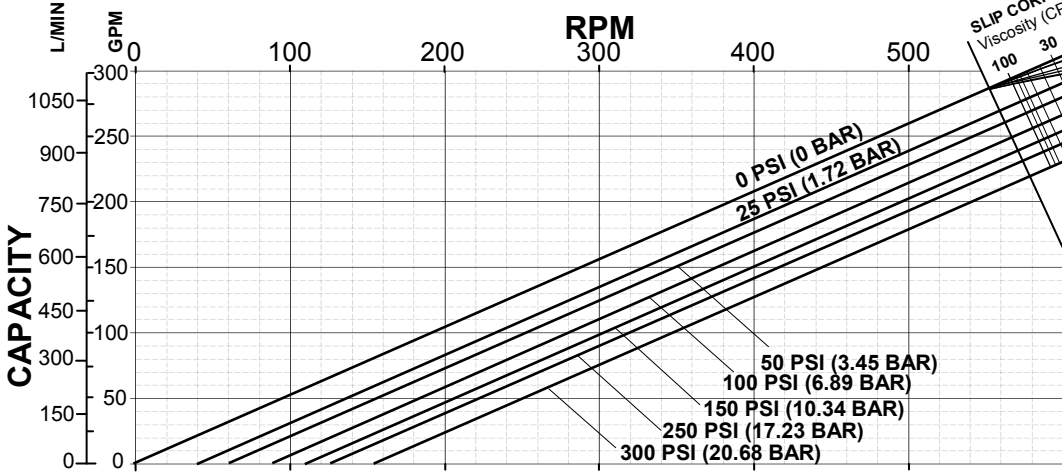


Ampco
ZP2 Series
Model: ZP2-220
ZP2-224

Standard Clearances
 Standard Port Size = 4.0"
 Displacement =
 0.521 Gal/Rev
 (1.972 L/Rev)

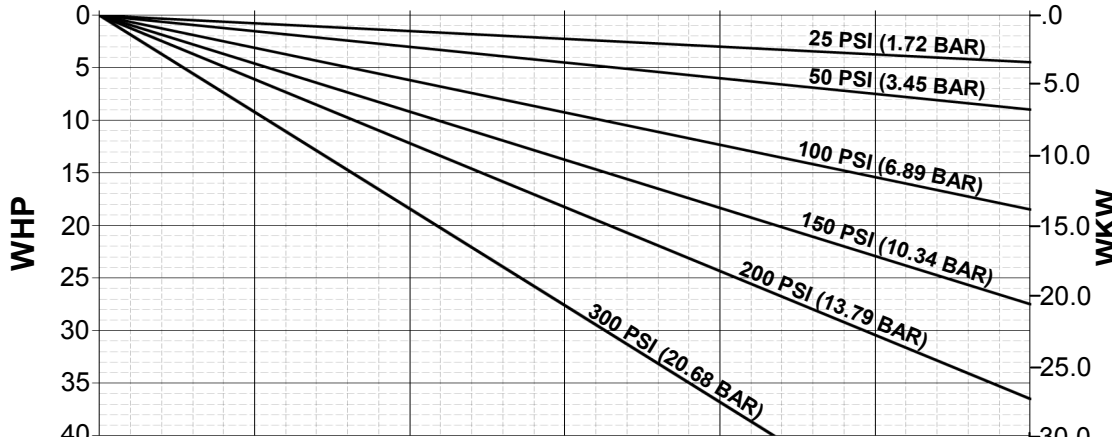


BHP = WHP + VHP

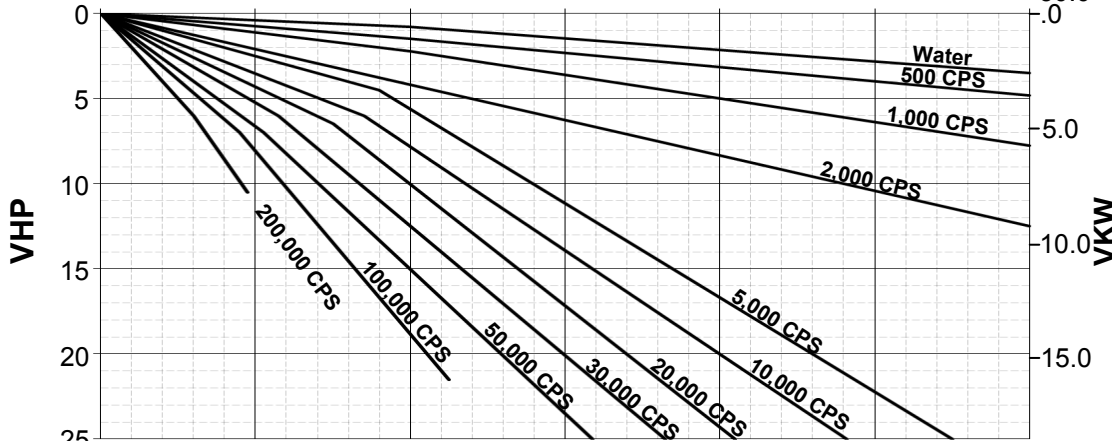

- Operating Specifications:
- 0-600 RPM Range
 - 300 PSI (20.68 bar) Max. Pressure
 - Temperature Range
 -40 °F (-40°C) to
 300 °F (149°C)

Subject to change without notice

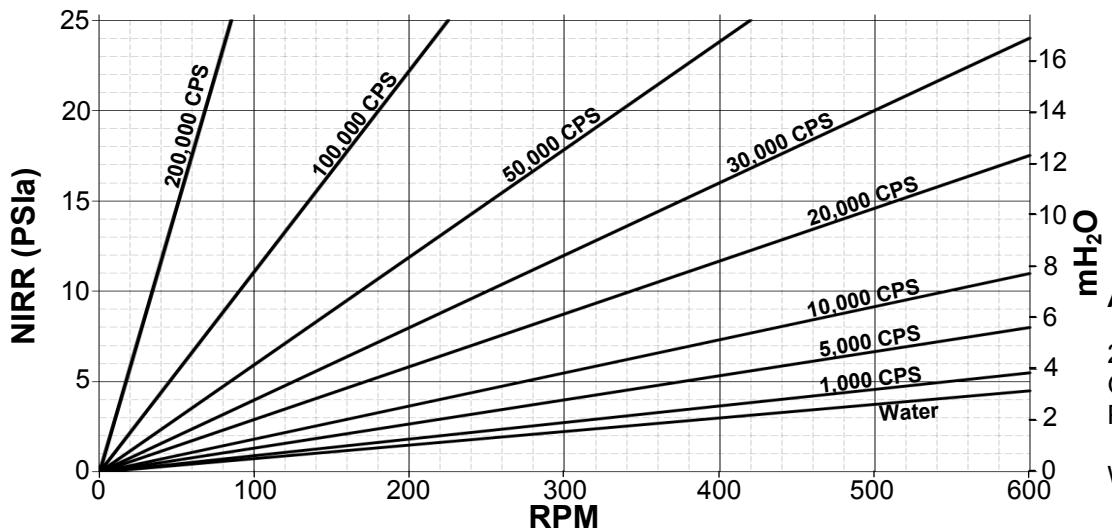


Ampco Pumps Company

2045 West Mill Road
 Glendale, WI 53209 USA
 Phone: (800) 737-8671
 (414) 643-1852

Website:
www.ampcopumps.com

ZP2 Series Positive Displacement Pumps

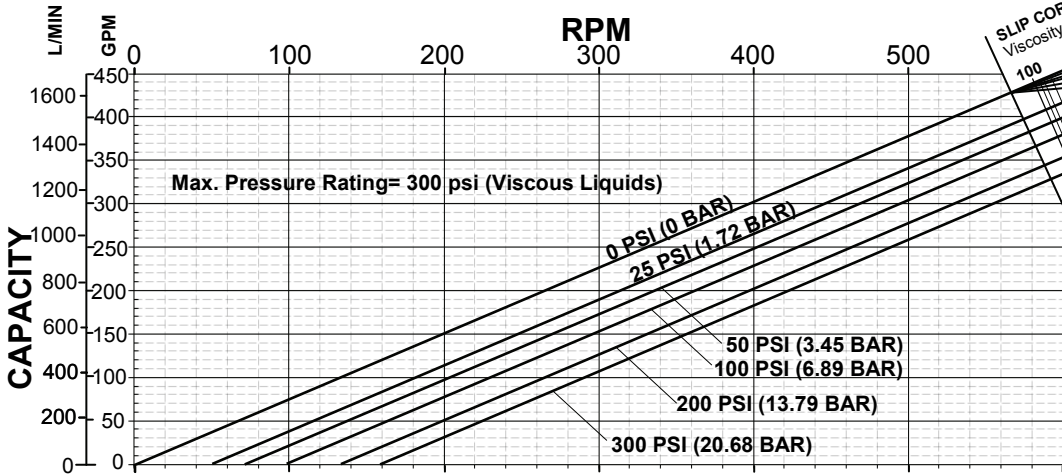

Ampco
ZP2 Series
Model: **ZP2-320**
ZP2-324

Standard Clearances
Standard Port Size = 6.0"
Displacement =




0.720 Gal/Rev
(2.725 L/Rev)

BHP = WHP + VHP

Operating Specifications:

- 0-600 RPM Range
- 300 PSI (20.68 bar) Max. Pressure
- Temperature Range
-40 °F (-40°C) to
300 °F (149°C)

Subject to change without notice

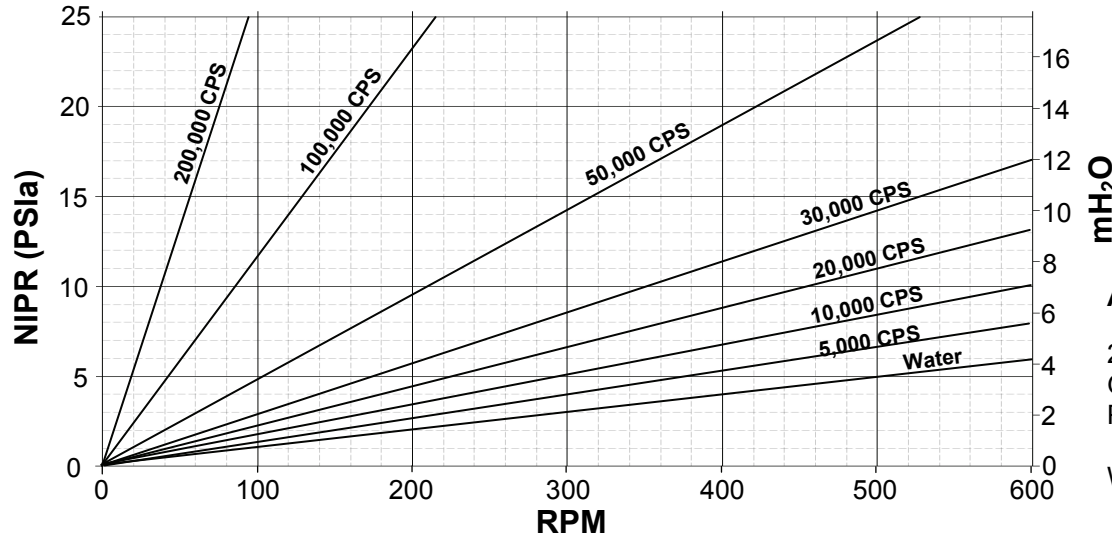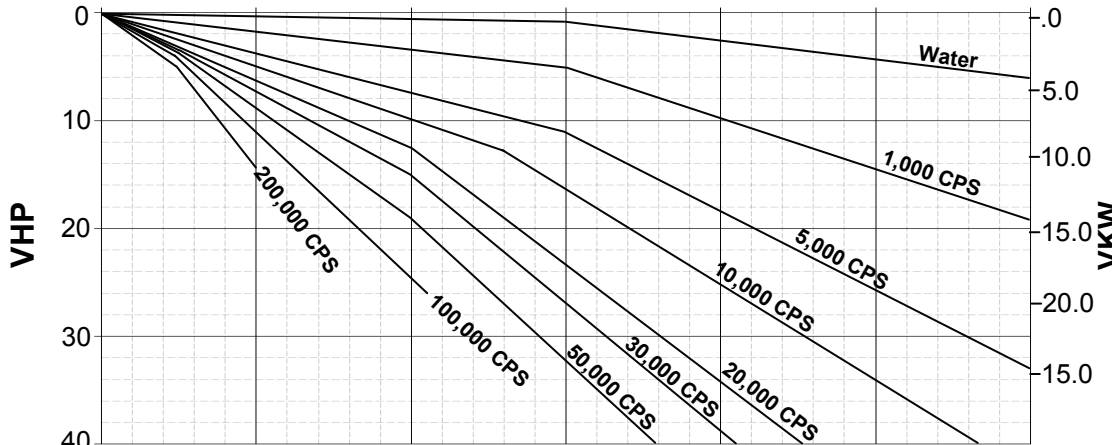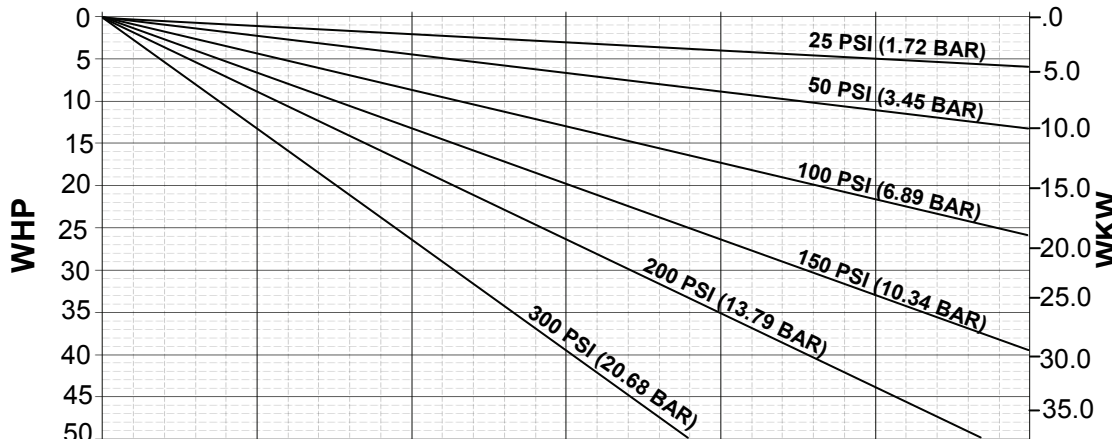

mH₂O

Ampco Pumps Company

2045 West Mill Road
Glendale, WI 53209 USA
Phone: (800) 737-8671
(414) 643-1852

Website:
www.ampcopumps.com