

# Alfa Laval Unique SSV Tank Outlet

## Single seat valves

### Introduction

The Alfa Laval Unique SSV Tank Outlet is a versatile, reliable pneumatic single seat valve with a single contact surface between the plug and the seat to minimize the risk of contamination. Its compact, modular and hygienic design meets the highest process demands in terms of hygiene and safety.

Built on the well-proven Alfa Laval Unique SSV platform, it is designed for installations that open product flow into the tank (reverse-acting version) or close product flow from the tank (standard version).

Few moving parts ensure easy maintenance, high reliability and low total cost of ownership. A wide range of optional features enables customization to specific process requirements.

### Application

The Unique SSV Tank Outlet is designed for use as a shut-off valve when closing product flow from a tank or as a reverse-acting valve when opening product flow into a tank in hygienic applications across the dairy, food, beverage, brewery and many other industries.

### Benefits

- Exceptional valve hygiene and durability
- Superior cleanability – smooth inner valve body without crevices
- Extended seal life due to the defined seal compression
- Enhanced product safety due to the static seal leak detection
- Protection against full vacuum due to the double lip seal

### Standard design

The Alfa Laval Unique SSV Tank Outlet valve is available in a one-body configuration with plugs, actuator, clamp rings, and up to two ports.

To ensure flexibility, the valve seals are optimized for durability and long service life through a defined compression design. The actuator is connected to the valve body using a yoke, and all components are assembled with clamp rings.



An optional tank flange is available. When supplied, it is welded directly into the tank. Upon request, it can be supplied with TÜV approval AD 2000 and inspection certificate 3.1 according to EN10204.


The valve can also be fitted with the Alfa Laval ThinkTop V50 and V70 for sensing and control of the valve.

Using the Alfa Laval Anytime configurator, it is easy to customize to meet virtually any process requirement.

### Working principle

The Alfa Laval Unique SSV Tank Outlet is operated by means of compressed air from a remote location. The valve can be controlled using an Alfa Laval ThinkTop®.

### Certificates

 Authorized to carry the 3A symbol

## TECHNICAL DATA


### Temperature

Max. product pressure in tank:	109 psi (7.5 bar) - max. 68° F
	94 psi (6.5 bar) - max 212° F
	65 psi (4.5 bar) - 302° F
Temperature range:	14°F to +284°F (EPDM)

### Pressure

Max. product pressure in pipeline (depends on valve specs):	145 PSI (10 bar)
Max. product pressure in tank (depends on valve specs and temp.):	145 psi (10 bar) - max. 68° F
	123 psi (8.5 bar) - max 212° F
	109 psi (7.5 bar) - 302° F
Min. product pressure:	Full vacuum
Air pressure:	72.5 to 101.5 PSI (5 to 7 bar)

### Valve Body Combinations



## PHYSICAL DATA

### Materials

Product wetted steel parts:	AISI 316L (internal Ra < 32 μ inch)
Other steel parts:	AISI 304
Plug seal:	PTFE (TR2) (standard)
Optional elastomer plug seal:	EPDM, HNBR or FPM
Optional product wetted seals:	HNBR and FPM
Other seals:	NBR

### Options

- Weld ends or connection types other than Tri-Clamp.
- Control and Indication: IndiTop, ThinkTop or ThinkTop Basic.
- Aseptic version.
- Product wetted seals in HNBR or FPM.
- Replaceable elastomer plug seals.
- Manually operated.
- NO or A/A actuator.
- High pressure actuator.
- Long stroke actuator.
- Maintainable actuator.
- External surface finish bright.
- Adapter to mount to 32-154 & 32-595 tank flange "Model 7635".



### Note!

For further details, see instruction ESE00364.

### Other valves in the same basic design

The valve range includes several purpose built valves. Below are some of the valve models available, though please use the Alfa Laval Anytime configurator for full access to all models and options.

- Single Seat valve.
- Reverse acting valve.
- Long stroke valve.
- Manually operated valve.
- Aseptic valve.

Semi-Maintainable actuator comes with 5 year warranty.

### Dimensions (inch)

Size	2"	2½"	3"	4"
A1	16.79	17.28	18.84	19.81
A2	15.49	15.98	17.5	18.51



CSI

CONTACT CSI FOR MORE INFORMATION | CSIDESIGNS.COM | SALES@CSIDESIGNS.COM | 417.831.1411

Size	2"	2½"	3"	4"
A3	14.50	15.00	16.36	17.33
A4	15.37	15.86	17.42	18.39
A5	14.35	14.84	16.20	17.17
C	1.18	1.2	1.18	1.18
OD	2.01	2.5	3.0	4
ID	1.88	2.37	2.87	3.84
t	0.06	0.06	0.06	0.08
E	2.40	3.19	3.39	4.69
E1	2.63	2.88	3.13	3.61
F1	0.98	0.98	1.18	1.18
F2	1.02	1.02	1.22	1.22
H	4.52	4.52	6.07	6.07
J	5.83	6.42	7.01	7.80
S	0.61	0.61	0.81	0.81
M/ Clamp	0.50	0.50	0.50	0.63
O	1.02	1.02	1.02	1.02
N	4.2	4.2	5.87	5.87
P	2.59	2.84	3.09	3.57
R	1.96	1.96	2.63	2.63
<b>Weight (lb)</b>				
Standard	7.1	8.3	13.3	15.9
Reverse Acting	7.2	8.4	13.5	16.1

A<sub>1</sub> = min. installation measure to allow that valve can be lifted out of the tank flange / valve body (if Indication Unit is mounted, height must be added)

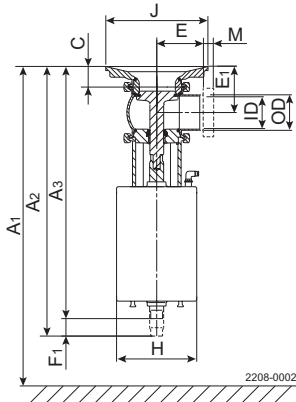


Figure 1. Standard

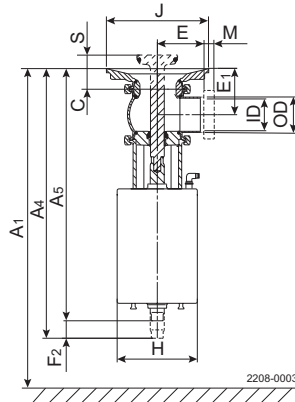


Figure 2. Reverse Acting




Figure 3. Flange adapter




Figure 4. Replaceable elastomer plug seal

**Please note!**

**Opening/closing time will be affected by the following:**

- The air supply (air pressure).
- The length and dimensions of the air hoses.
- Number of valves connected to the same air hose.
- Use of single solenoid valve for serial connected air actuator functions.
- Product pressure.

**Air Connections Compressed air:**

R 1/8" (BSP), internal thread.



Air consumption (ln<sup>3</sup> free air) for one stroke





2" - 2½"

3" - 4"

2.17 x air pressure [psi]

5.51 x air pressure [psi]

Pressure drop/capacity diagrams

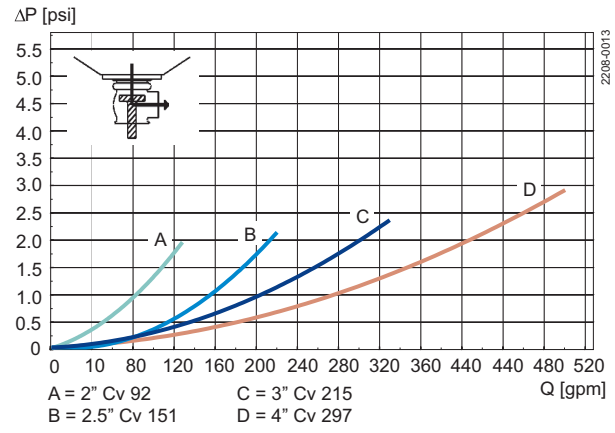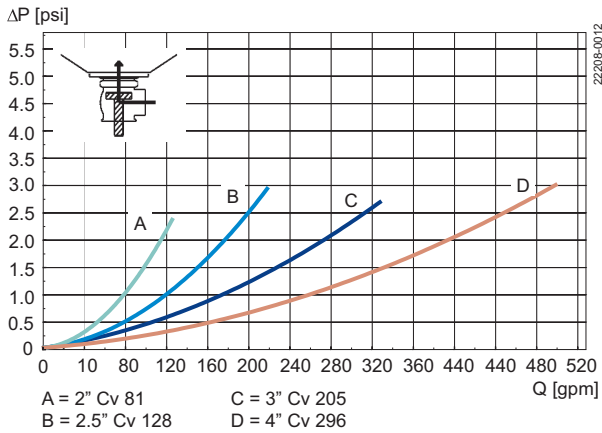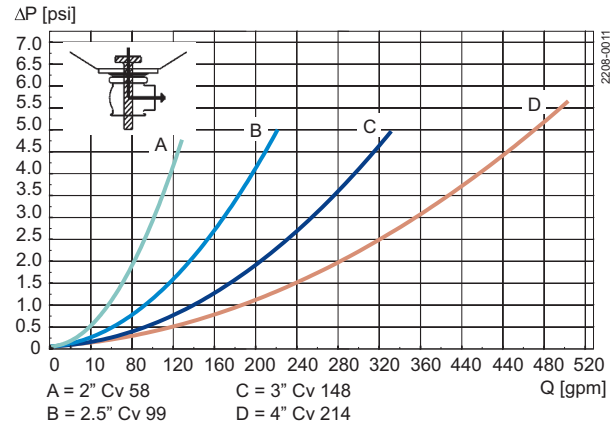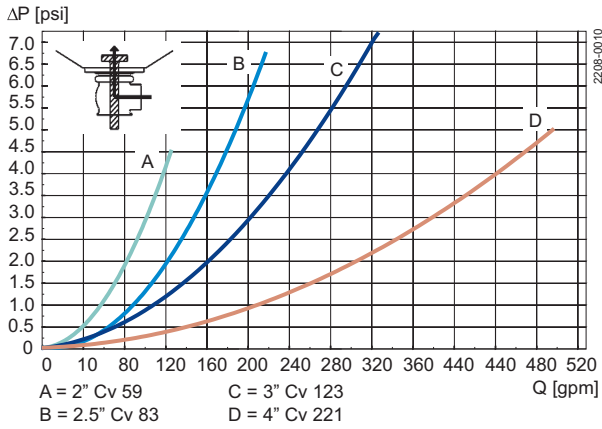

**Note!**

For the diagrams the following applies:  
 Medium: Water (68° F/20°C)  
 Measurement: In accordance with VDI2173  
 Pressure drop can also be calculated in Anytime configurator.

Pressure drop can also be calculated with the following formula:

$$Q = Cv \times \sqrt{\Delta p}$$

Where:

Q = Flow (gallon/minute)

Cv = gallon/minute at a pressure drop of 1 psi (see table above)

Δ p = Pressure drop in psi over the valve

Where:

Q = Flow (gallon/minute).

Cv = gallon/minute at a pressure drop of 1 psi (see table above)



$\Delta p$  = Pressure drop in psi over the valve

2.5" shut-off valve, where  $C_v = 128$  (see table above)

$$Q = K_v \times \sqrt{\Delta p}$$

$$160 = 128 \times \sqrt{\Delta p}$$

$$\Delta p = \left(\frac{160}{128}\right)^2 = 1,6 \text{ psi}$$

(This is approx. the same pressure drop by reading the y-axis above)

### Pressure data for Unique Single Seat Valve Tank Outlet




Figure 5. 1




Figure 6. 2




Figure 7. 3




Figure 8. 4

A = Air

P = Product pressure

Shut fully closed

Actuator / Valve body combination and direction of pressure	Max. pressure in PSI without leakage at the valve seat			
	Valve size			
	2"	2½"	3"	4"
1	104	61	93	61
2	122	65	99	64

Actuator / Valve body combination and direction of pressure	Air pressure (PSI)	Max. pressure in PSI against which the valve can open			
		Valve size			
		2"	2½"	3"	4"
3	87	145	131	145	100
4	87	145	121	144	96

This document and its contents are subject to copyrights and other intellectual property rights owned by Alfa Laval Corporate AB. No part of this document may be copied, re-produced or transmitted in any form or by any means, or for any purpose, without Alfa Laval Corporate AB's prior express written permission. Information and services provided in this document are made as a benefit and service to the user, and no representations or warranties are made about the accuracy or suitability of this information and these services for any purpose. All rights are reserved.

200005490-1-EN-US

© Alfa Laval Corporate AB

#### How to contact Alfa Laval

Up-to-date Alfa Laval contact details for all countries are always available on our website at [www.alfalaval.com](http://www.alfalaval.com)

