

# Alfa Laval Unique RV-P

## Regulating valves

### Introduction

The Alfa Laval Unique RV-P Regulating Valve is an automatic hygienic regulating valve with an electro-pneumatic actuator for use in applications that require precision control of flow as well as pressure, temperature, and tank fluid levels.

### Application

The Unique RV-P Regulating Valve is designed for precise flow control in the dairy, food, beverage, biotechnology, pharmaceutical and many other industries.

### Benefits

- Precision flow control
- Advanced hygienic valve design
- Dedicated protection
- Reliable operation
- Large operating range


### Standard design

Built on the Alfa Laval Unique SSV platform, the Unique RV-P Regulating Valve consists of valve body, valve plug, lip seal, and an external normally open (NO) actuator with bonnet. The actuator is fitted to the valve body by means of a clamp. The Kv value is flexible as lower element can be exchanged. Manual and aseptic versions are available. Upon request, the valve can also be supplied with a normally closed (NC) actuator.

### Working principle

The Alfa Laval Unique RV-P Regulating Valve is controlled from a remote location by means of compressed air. An actuator with an integrated IP converter IP converter transforms the electrical signal to a pneumatic signal. This signal conversion is based on a highly accurate and reliable contactless AMR sensor, making it insensitive to vibrations and pressure shocks. The pneumatic signal is transmitted to the integrated positioner which operates by means of the force-balance principle, ensuring that the position of the actuator piston is directly proportional to the input signal. Signal range and zero point can be adjusted individually. The actuator can be used for split-range operation by using a different measuring spring.

### Certificates

 Authorized to carry the 3A symbol



## TECHNICAL DATA

Valves	
Max. product pressure:	1000 kPa (145 PSI)
Min. product pressure:	Full vacuum
Temperature range:	14°F to 284°F (EPDM)
Flow range Kv ( $\Delta p = 1 \text{ bar} = 14.5 \text{ PSI}$ ):	2.2 -484.32 US GPM
Max. pressure drop:	500 kPa (72.52 PSI)

Actuator	
Air quality	
Air connection:	6/4 air tube with air fitting R1/8" (BSP)
Max. pressure:	600 kPa (87 PSI)
Working pressure:	400 kPa (58 PSI)
Max. size of particles:	0.0003936996 inch
Max. oil content:	0.08 ppm
Dew point:	50°F below ambient temp. or lower
Max. water content:	0.17 lbs/lbs


I/P converter	
Signal range:	4 - 20 mA (standard)
Input resistance:	200 $\Omega$
Inductivity/capacitance:	Negligible

## PHYSICAL DATA

Materials, Valves	
Product wetted steel parts:	Acid-resistant steel, AISI 316L (1.4404)
Other steel parts:	Stainless steel, AISI 304 (1.4301)
Product wetted seals:	EPDM
External finish:	Semi-bright (blasted)
Internal finish:	Bright (polished) RA<32 $\mu\text{in}$

Materials, Actuator	
Actuator cases:	Aluminium with plastic coating
Diaphragms:	NBR with reinforced fabric insert
Springs:	Stainless steel uncovered/spring steel epoxy resin coated
Actuator stem:	Polyamide
Screws, nuts:	Stainless steel, polyamide
Other parts:	Stainless steel

## Valve body combinations



## Accuracy

Deviation:	$\leq 1.5\%$
Hysteresis:	$\leq 0.5\%$
Sensitivity:	$< 0.1\%$
Influence of air supply pressure:	$\leq 0.1\%$ between 20.3 and 87 bar
Air consumption at steady state condition:	With 8.7 PSI signal pressure and supply pressures up to 87 PSI $\leq 100 \text{ ln/h}$
Ambient temperature:	-13°F to +158°F
Protection class:	IP 66




## Flow sizes/tube connections

Kv	Seat diam.		Tube connections		Actuator (type no.)	
	(mm)	inch	ISO (mm)	inch	NO	NC
	0.5 E	6	0.24	38	1½"	3277-5
1,0 E	10	0.39	38	1½"	3277-5	3277-5
2 E	12	0.47	38	1½"	3277-5	3277-5
4 E	14	0.55	38	1½"	3277-5	3277-5
8 E	23	0.91	38	1½"	3277-5	3277-5
16 E	29	1.14	38	1½"	3277-5	3277-5
25 E	38	1.50	51	2"	3277-5	3277-5
32 E	48.5	1.91	51	2"	3277-5	3277-5
40 E	42	1.65	63.5	2½"	3277-5	3277-5
64 L	51	2.01	63.5	2½"	3277-5	3277-5
75 L	51	2.01	76.1	3"	3277-5	3277-5
110 L	72	2.83	101.6	4"	3277-5	3277-5

## Options

- A. Male parts or clamp liners in accordance with required standard.
- B. Product wetted seals of HNBR or Fluorinated rubber (FPM).
- C. Profibus communication
- D. Aseptic configuration Max 116 ps

## Dimensions (inch)



Size	1.5"	2"	2.5"	3"	4"		DN40	DN50	DN65	DN80	DN100	
	NO/NC	NO/NC	NO/NC	NO/NC	NO	NC	NO/NC	NO/NC	NO/NC	NO/NC	NO	NC
A- std	16.1	16.7	15.9	17.3	18.2	18.9	16.2	16.7	16.2	17.6	18.3	19
A- aseptic	16.2	16.8	16.2	17.6	18.5	19.2	16.3	16.8	16.5	17.9	18.6	19.3
E	2.2	2.5	2.6	3.3	3.8	3.8	2.2	2.5	2.8	3.5	3.9	3.9
G	1.9	2.4	3.2	3.4	4.7	4.7	1.9	2.4	3.1	3.4	4.7	4.7
H	6.6	6.6	6.6	6.6	6.6	11	6.6	6.6	6.6	6.6	6.6	11
OD	1.5	2	2.5	3	4	4	1.6	2.1	2.8	3.3	4.1	4.1
ID	1.4	1.9	2.4	2.9	3.8	3.8	1.5	2	2.6	3.2	3.9	3.9
t	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
M/ISO clamp	0.8	0.8	0.8	0.8	0.8	0.8						
M/DIN clamp							0.8	0.8	1.1	1.1	1.1	1.1
M/DIN male							0.9	0.9	1	1	1.2	1.2
M/SMS male	0.8	0.8	0.9	0.9	1.4	1.4						
Weight lb	18.1	20.5	21.4	24.7	34.0	54.9	18.1	20.5	21.4	24.7	34.0	54.9




CSI

CONTACT CSI FOR MORE INFORMATION | CSIDESIGNS.COM | SALES@CSIDESIGNS.COM | 417.831.1411

## Capacity diagram

For  $\Delta P = 100 \text{ kPa}$  (1bar).

### Standard

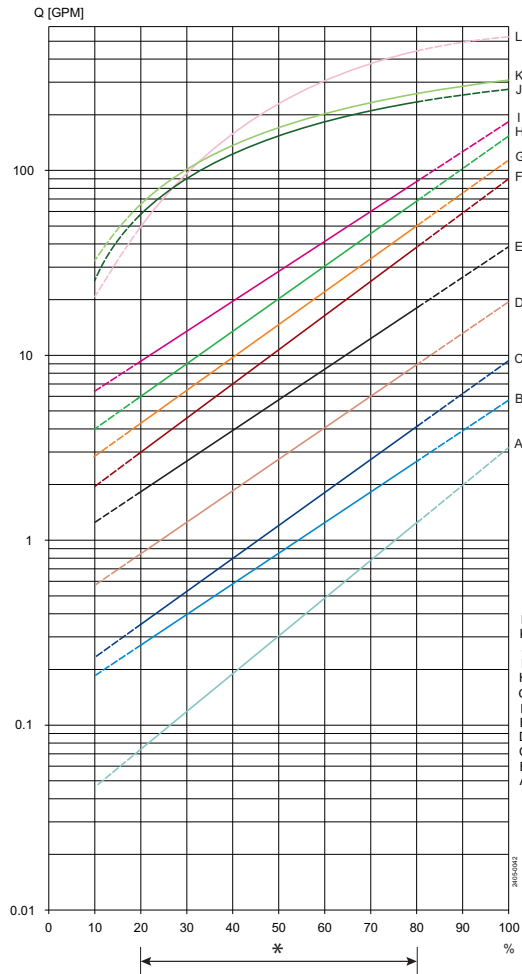

\*Recommended working area

### Conversion Table

100 kPa = 1 bar = 14.5 PSI

10 mm = 0.39 inch

10 m<sup>3</sup>/h = 44.03 US GPM

### Note!

For the diagram the following applies:

Medium: Water (68°F).

Measurement: In accordance with VDI 2173.

Alfa Laval recommend max. flow velocity in tubing and valves to be 5 m/sec.

### Pressure drop calculation

The Kv designation is the flow rate in m<sup>3</sup>/h at a pressure drop of 1 bar when the valve is fully open (water at 68°F or similar liquids).


To select the Kv value it is necessary to calculate the Kv<sub>q</sub> value using the following formula:

$$Kv_q = \frac{Q}{\sqrt{\Delta P}}$$

Where:

- Kv<sub>q</sub> = Kv value at specific flow and specific pressure drop
- Q = Flow rate (m<sup>3</sup>/h)
- $\Delta P$  = Pressure drop over valve (bar)

### Aseptic

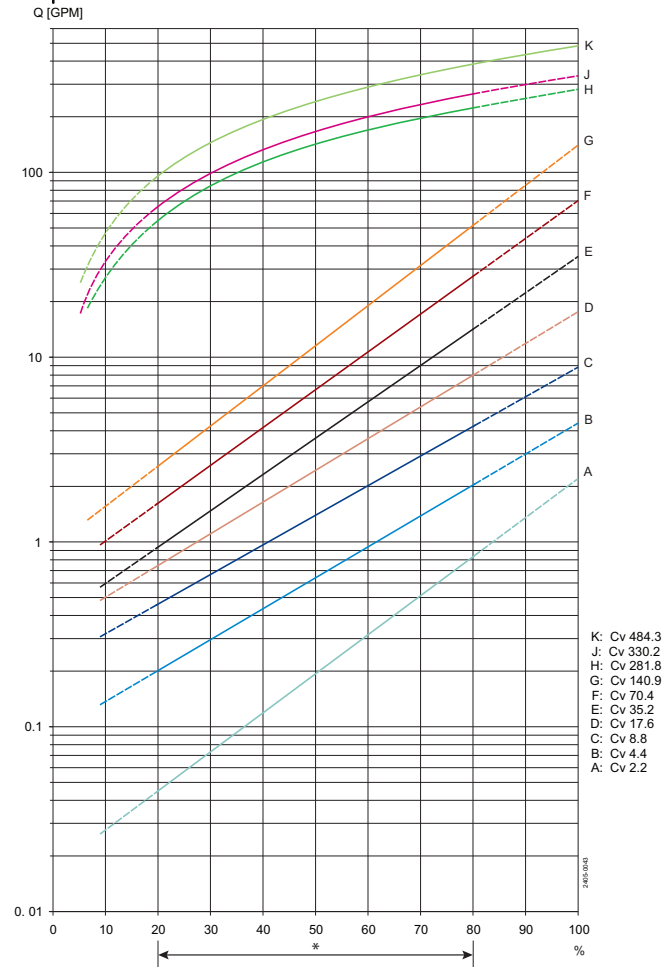


CSI

CONTACT CSI FOR MORE INFORMATION | CSIDESIGNS.COM | SALES@CSIDESIGNS.COM | 417.831.1411

## Electrical connection

### Electrical connection - Analoug 4-20 mA

#### Positioner 3725

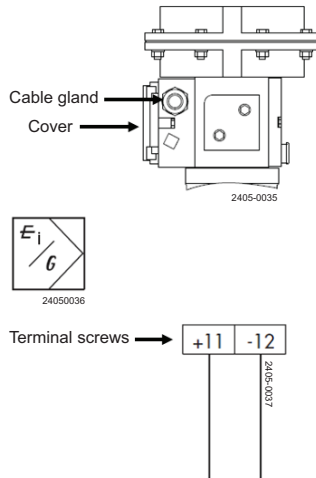


#### 4-20 mA control signal

Route the two-wire line to the screw terminals marked "11 and 12", whereby the correct polarity has to be ensured

1. Open the cover of the positioner for electrical connection
2. Fit the cable through the cable gland and connect the cable wires to the terminal screws. (+11 and -12)
3. Tighten the cable gland and close the cover of the positioner

### Electrical connection - Profibus PA

#### Positioner 3730-4

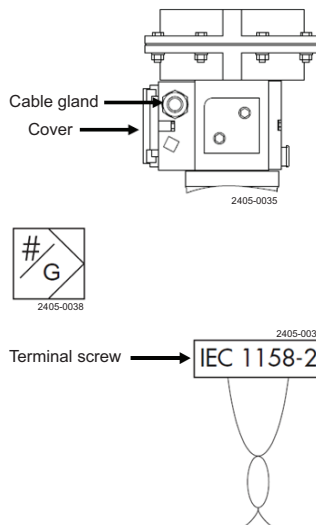

#### Bus control signal

Route the two-wire bus line to the screw terminals marked "IEC 1158-2", whereby no polarity has to be observed

1. Open the cover of the positioner for electrical connection
2. Fit the bus cable through the cable gland and connect the cable wires to the terminal screws. (IEC 1158-2)
3. Tighten the cable gland and close the cover of the positioner

By searching on positioner type 3730-4 you can either retrieve the GSD files for PROFIBUS PA communication directly from the World Wide Web server of Samson or the PROFIBUS User Organization

Alfa Laval reserves the right to change specifications without prior notification.

---

**How to contact Alfa Laval**

Contact details for all countries are continually updated on our website. Please visit [www.alfalaval.us](http://www.alfalaval.us) to access the information direct.

ALFA LAVAL is a trademark registered and owned by Alfa Laval Corporate AB.

