


SolidC-3, 60 Hz (1800 rpm. synchr.)

Motor:	1800 rpm. synchr.
Tolerance:	±8% for Q ±6% for H
Impeller, Max. dia.:	8.66"
Impeller, Min. dia.:	6.69"
Pump inlet, dia.:	3", DN 80
Pump outlet, dia.:	1½", DN 40
Performance data refer to water at 68 °F	



Note! The curves refer to motor: 8.4 Hp, 1720 rpm. asynchr., 60 Hz.

DO NOT FORGET THE SAFETY FACTOR

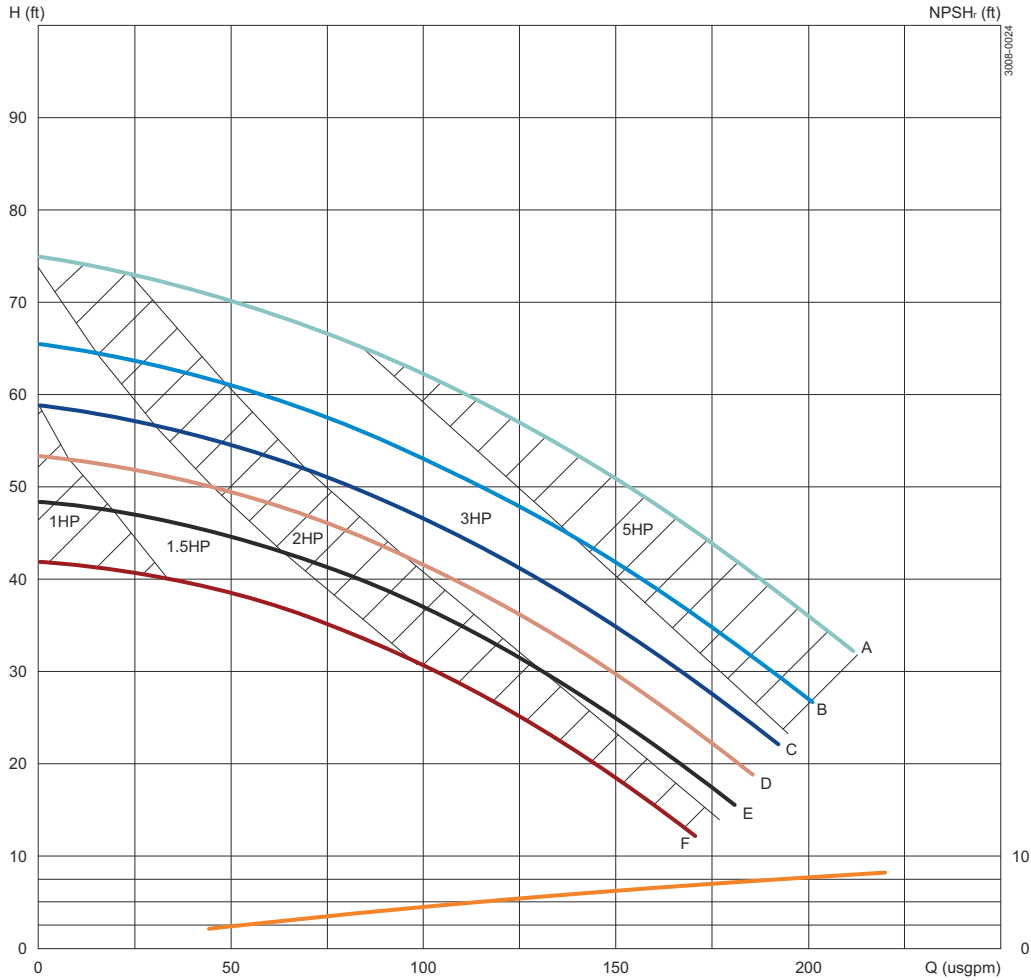

A = 8.66"	D = 7.48"
B = 8.27"	E = 7.09"
C = 7.87"	F = 6.69"

SolidC-3, 60 Hz (3600 rpm. synchr.)

Motor:	3600 rpm. synchr.
Tolerance:	±8% for Q ±6% for H
Impeller, Max. dia.:	8.66"
Impeller, Min. dia.:	6.69"
Pump inlet, dia.:	3", DN 80
Pump outlet, dia.:	1½", DN 40
Performance data refer to water at 68 °F	



Note! The curves refer to motor: 3.6 kW, 1720 rpm. asynchr., 60 Hz.

DO NOT FORGET THE SAFETY FACTOR

