


SolidC-2, 60 Hz (1800 rpm. synchr.)

Motor:	1800 rpm. synchr.
Tolerance:	±8% for Q ±6% for H
Impeller, Max. dia.:	7.48"
Impeller, Min. dia.:	5.51"
Pump inlet, dia.:	2½", DN 65
Pump outlet, dia.:	1½", DN 40
Performance data refer to water at 68 °F	



Note! The curves refer to motor: 3,6 Hp, 1710 rpm. asynchr., 60 Hz.

DO NOT FORGET THE SAFETY FACTOR

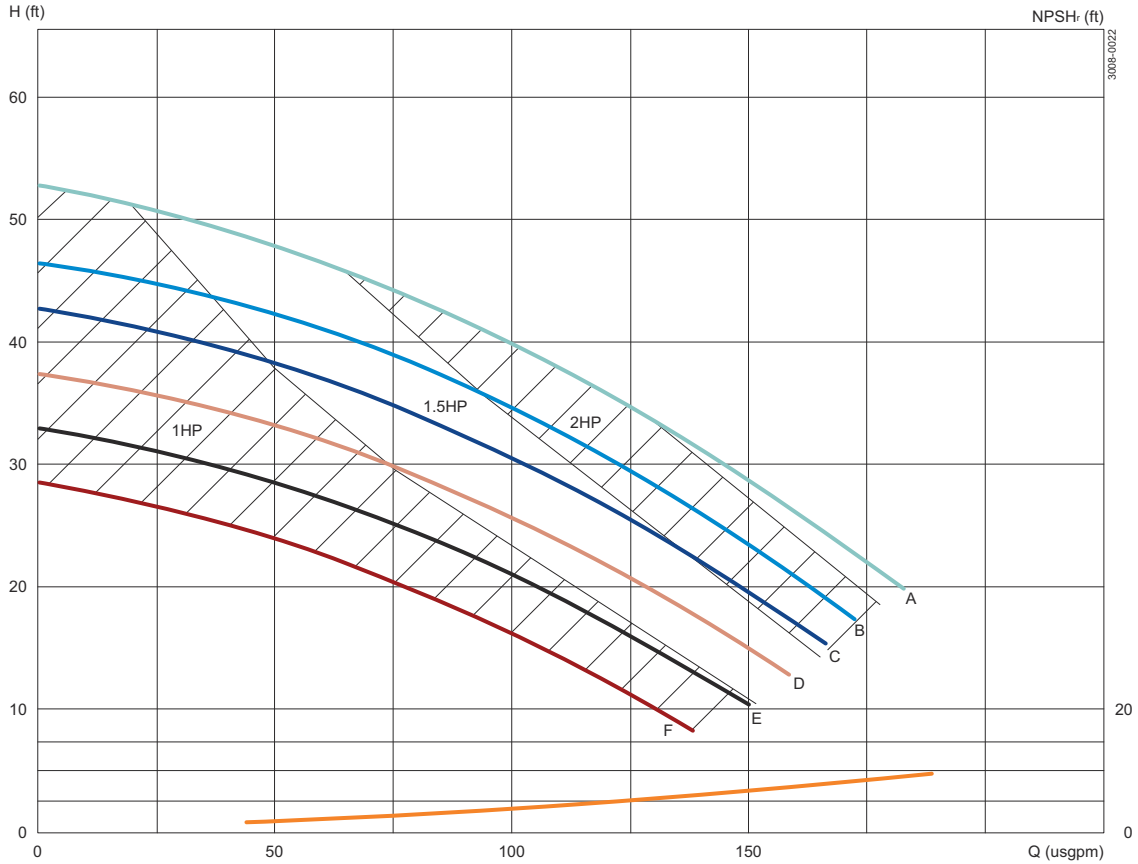

A = 7.48" D = 6.30"
 B = 7.09" E = 5.91"
 C = 6.69" F = 5.51"

SolidC-2, 60 Hz (3600 rpm. synchr.)

Motor:	3600 rpm. synchr.
Tolerance:	±8% for Q ±6% for H
Impeller, Max. dia.:	7.48"
Impeller, Min. dia.:	5.51"
Pump inlet, dia.:	2½", DN 65
Pump outlet, dia.:	1½", DN 40
Performance data refer to water at 68 °F	



Note! The curves refer to motor: 22.8 Hp, 3535 rpm. asynchr., 60 Hz.

DO NOT FORGET THE SAFETY FACTOR

