

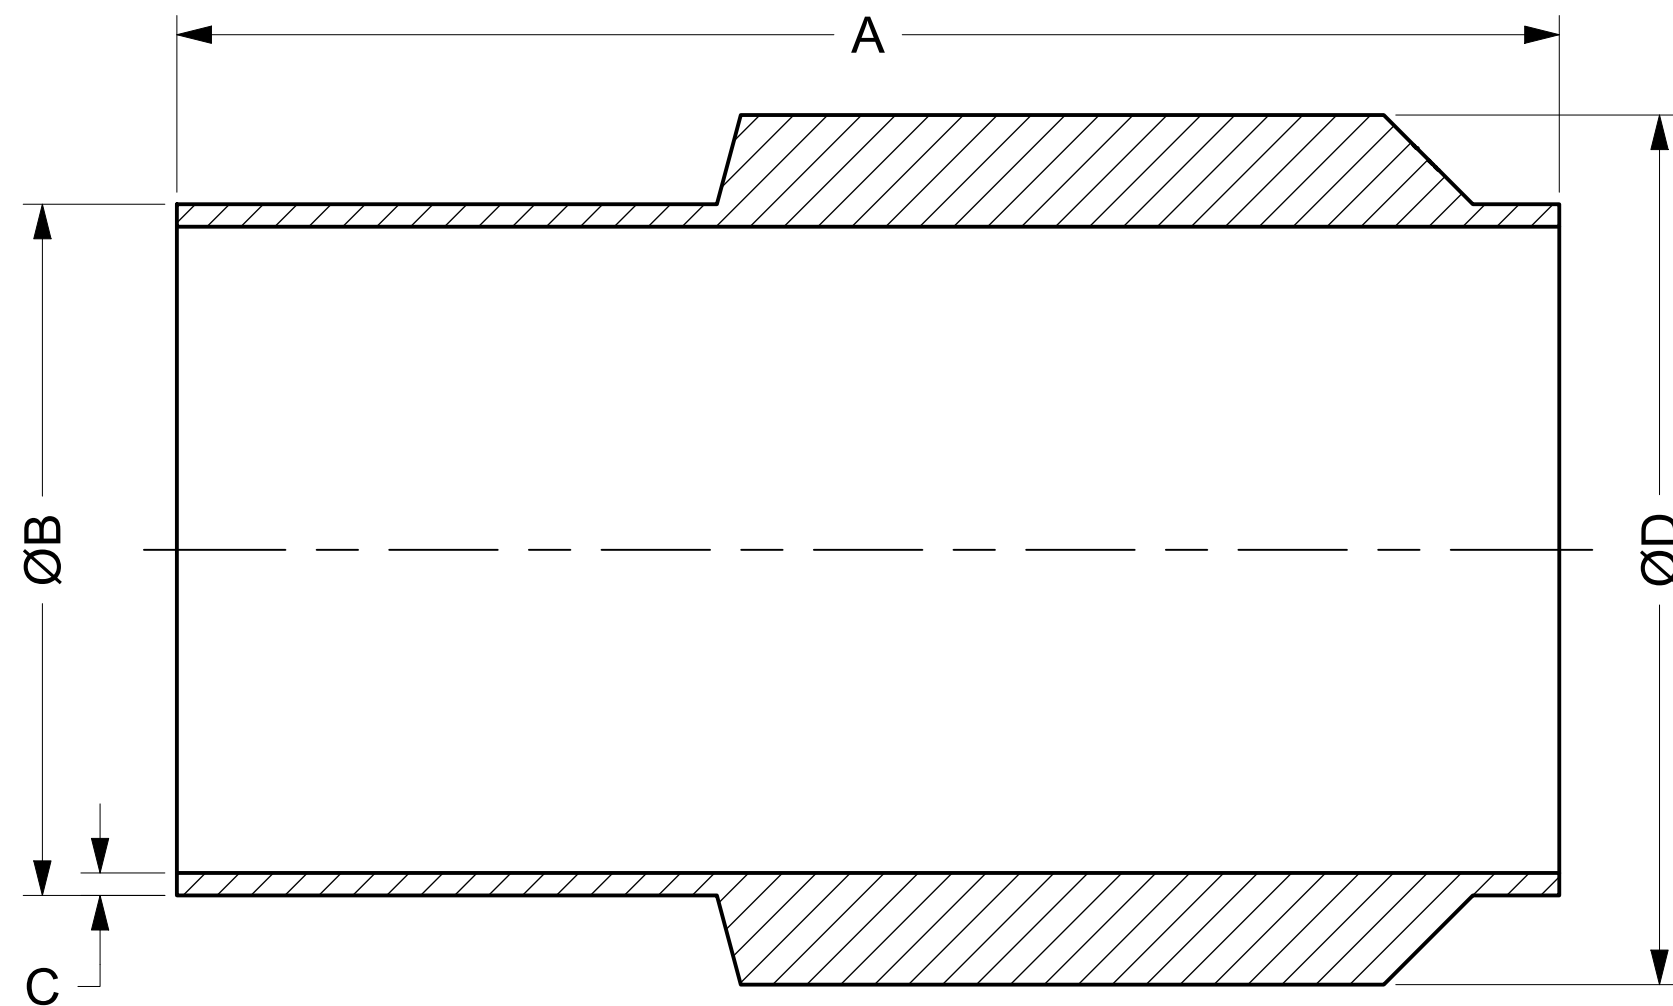


COMMON FINISHES		
DESIGNATION	PROCESS CONTACT	NON-PROCESS CONTACT
-1	MILL	MILL
-7	32 RA	32 RA
-PL	20 RA	32 RA
-PO	20 RA EP	32 RA
-PM	15 RA EP	32 RA

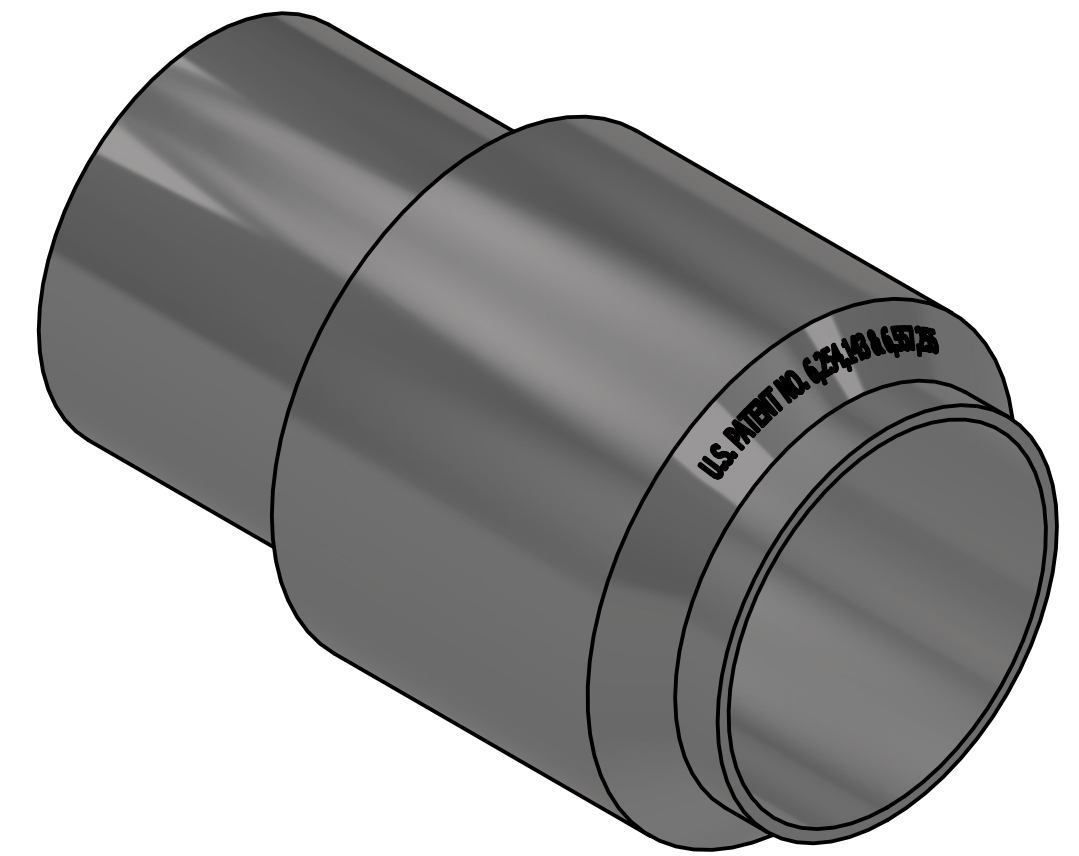

SECTION A-A

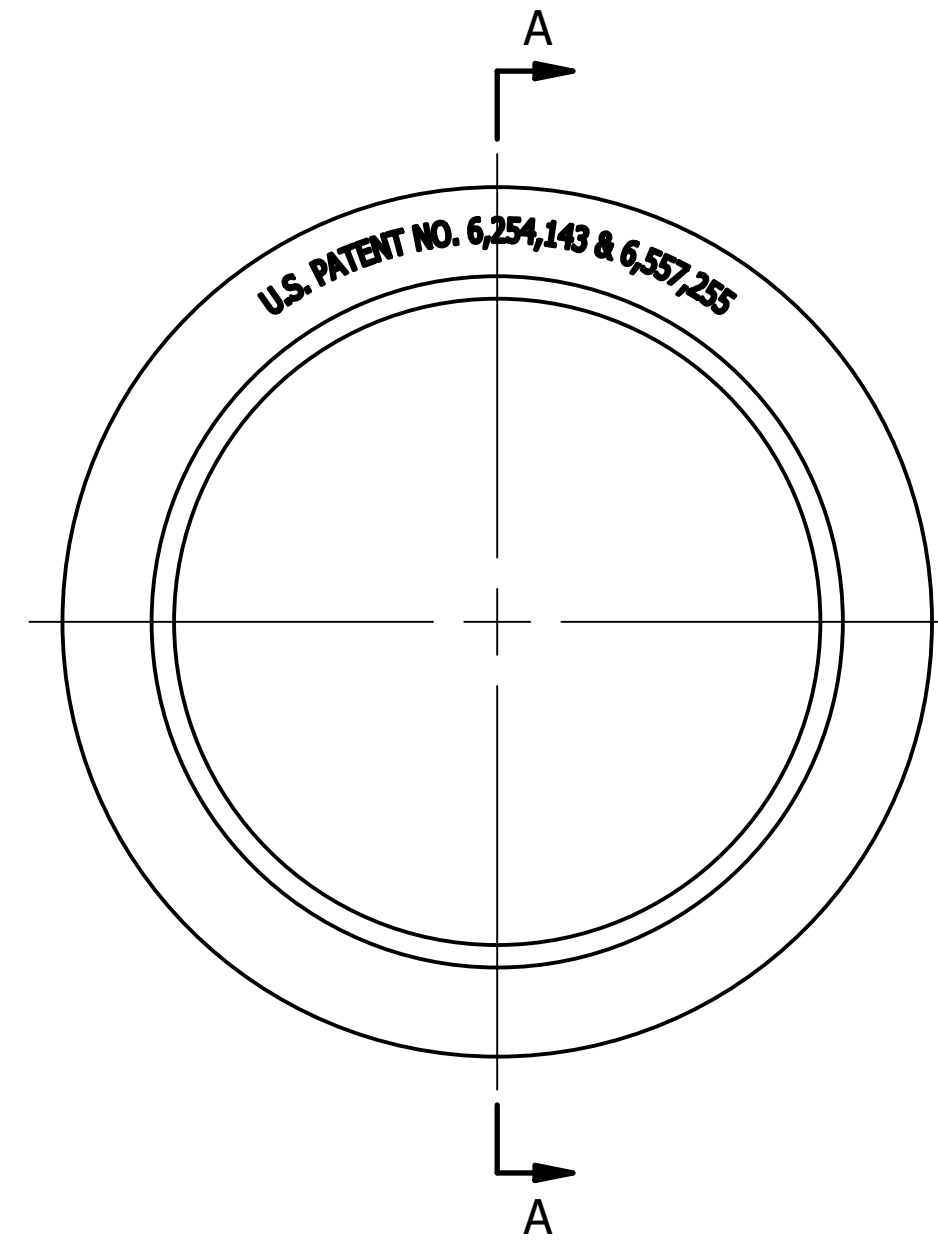

U.S. PATENT NO. 6,254,143 & 6,557,255

PART SIZE		OAL (A)		SIZE OD (B)		WALL THICKNESS (C)		COLLAR OD (D)	
IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
0.5	12.70	4.00	101.60	0.500	12.70	0.065	1.65	0.984	24.99
0.75	19.05	4.00	101.60	0.750	19.05	0.065	1.65	0.984	24.99
1	25.40	4.00	101.60	1.000	25.40	0.065	1.65	1.984	50.39
1.5	38.10	4.00	101.60	1.500	38.10	0.065	1.65	1.984	50.39
2	50.80	4.00	101.60	2.000	50.80	0.065	1.65	2.516	63.91
2.5	63.50	4.00	101.60	2.500	63.50	0.065	1.65	3.047	77.39
3	76.20	4.00	101.60	3.000	76.20	0.065	1.65	3.579	90.91
4	101.60	4.00	101.60	4.000	101.60	0.083	2.11	4.682	118.92

* INFORMATION PROVIDED IN THIS DRAWING IS FOR REFERENCE ONLY. FINISH AVAILABILITY DEPENDANT ON MATERIAL



PART NO.:

FVSPC-BW

DESCRIPTION:

COLLARED SPOOL, BW

MATERIAL OPTIONS:

304/304L SS

316/316L SS

AL-6XN® - N08367

HASTELLOY® C-22® - N06022

DWG NO.

CDFVSPC-BW

CREATION DATE

15SEP2025

SHEET

1 OF 1

REV.

-