


DuraCirc 32 Hi-Life


WITH NON GALLING 302°F CPP ROTORS AND MECHANICAL SEAL

TYPICAL PERFORMANCE CURVE


Flow at 1cPs

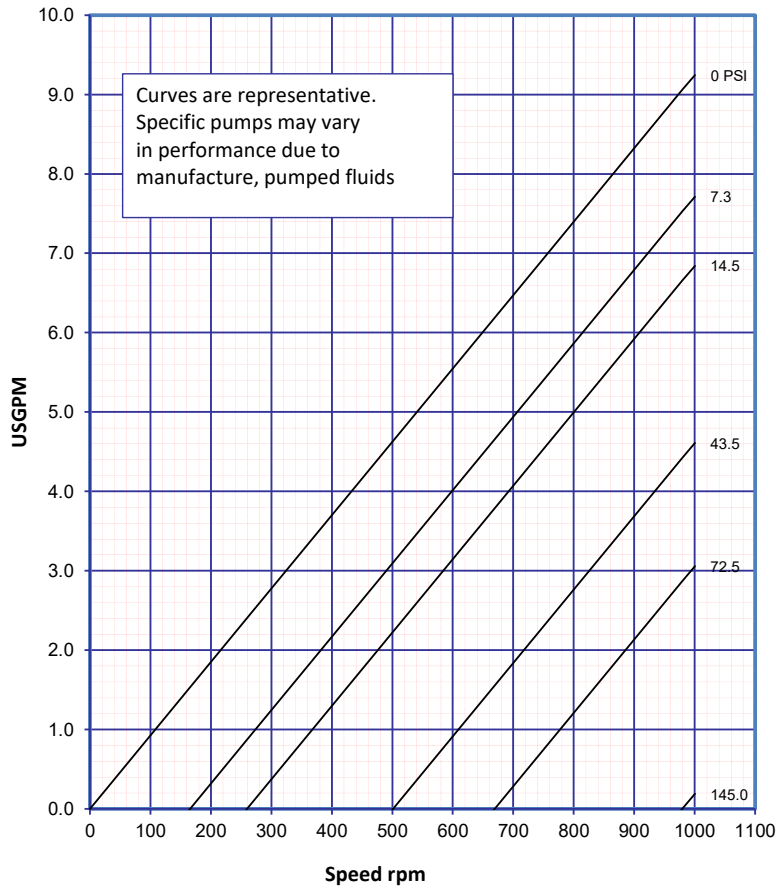


Power at 1 cPs

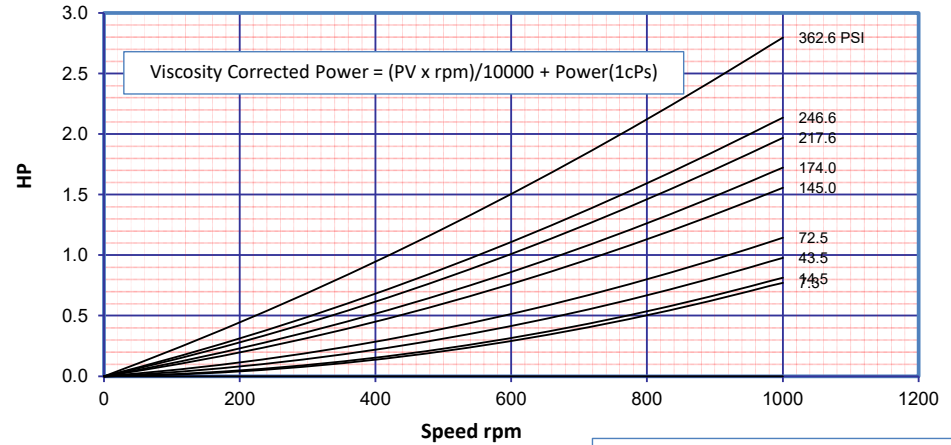

Flow - Viscosity Correction

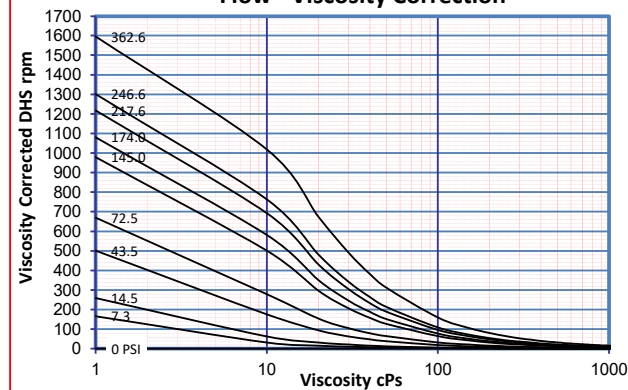

Power Viscosity Correction

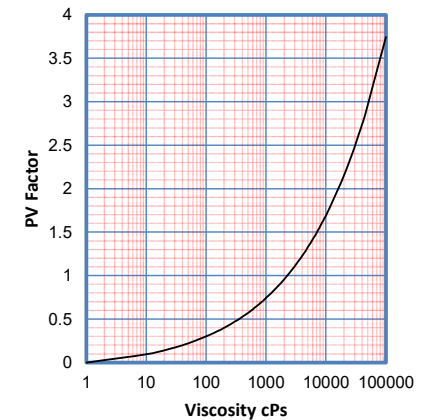


Port Diameter	152	76	51	38	30	25	22	19	17	15
1.00 Inch	100	200	300	400	500	600	700	800	900	1000
	Max Viscosity (cPs) x 100 @ 0 pressure									

DuraCirc 33 Hi-Life


WITH NON GALLING 302°F CPP ROTORS AND MECHANICAL SEAL

TYPICAL PERFORMANCE CURVE


Flow at 1cPs

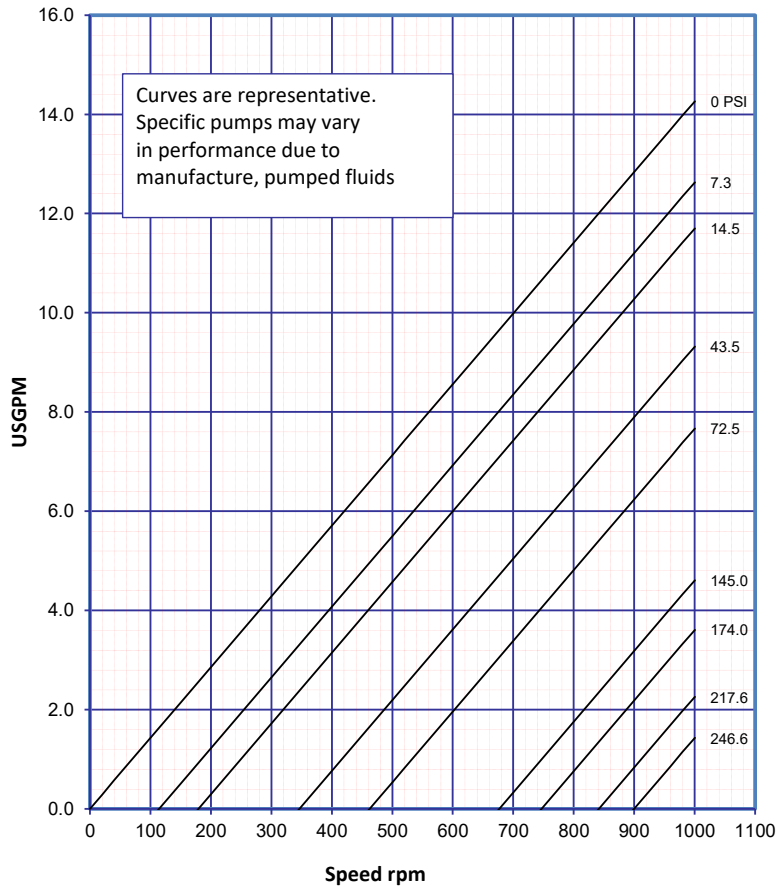


Power at 1 cPs

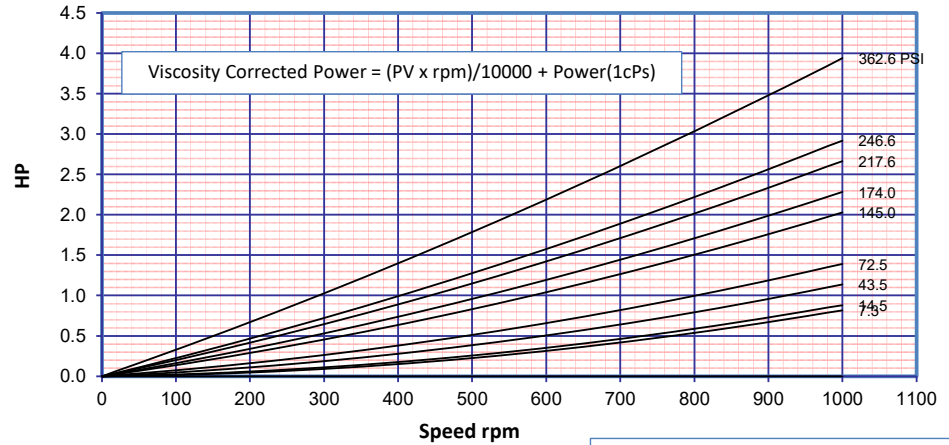

Flow - Viscosity Correction

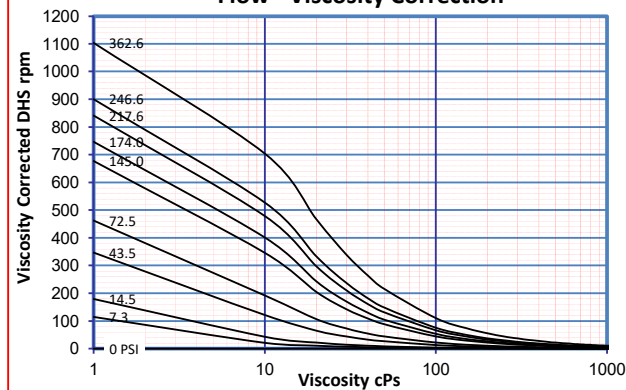

Power Viscosity Correction

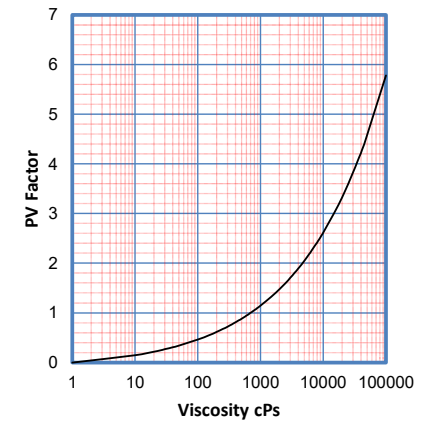


Port Diameter	601	301	201	151	120	100	86	75	66	59
1.50 Inch	100	200	300	400	500	600	700	800	900	1000
	Max Viscosity (cPs) x 100 @ 0 pressure									

DuraCirc 34 Hi-Life


WITH NON GALLING 302°F CPP ROTORS AND MECHANICAL SEAL

TYPICAL PERFORMANCE CURVE


Flow at 1cPs

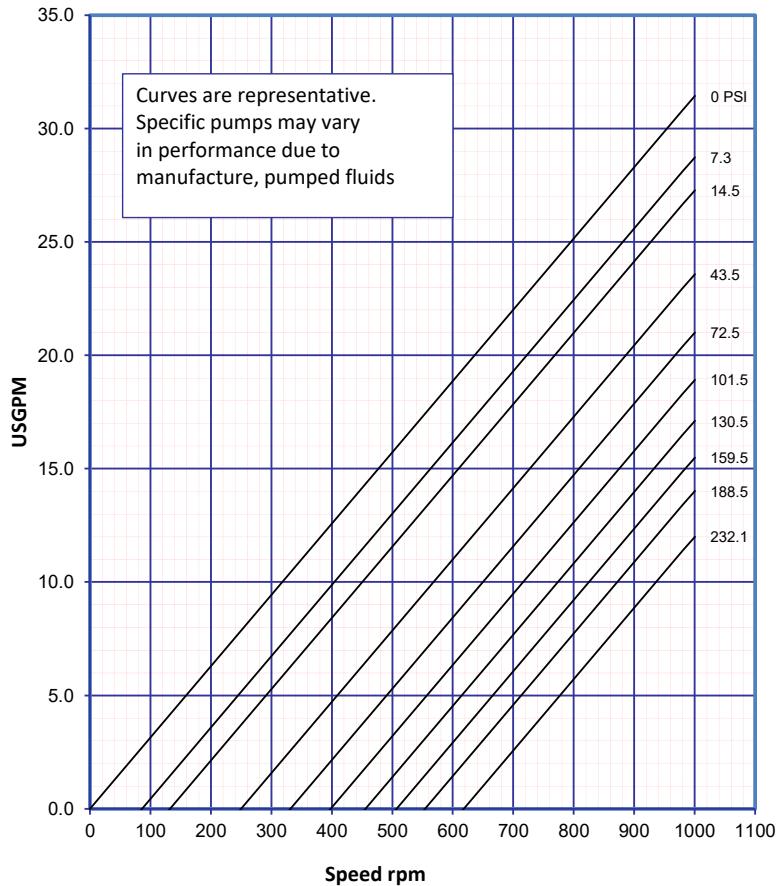


Power at 1 cPs

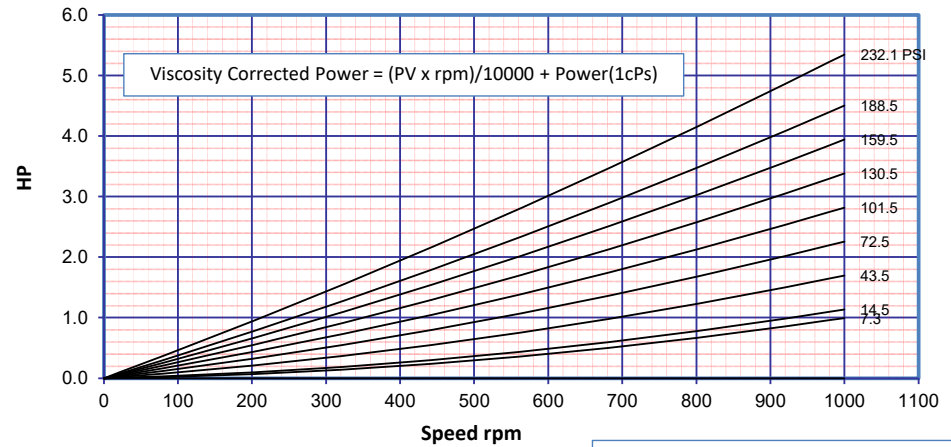

Flow - Viscosity Correction

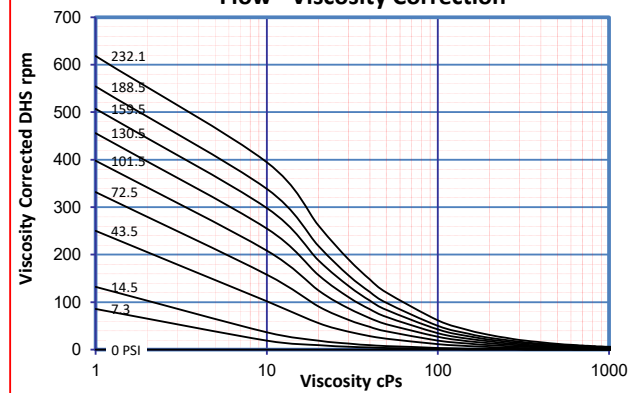

Power Viscosity Correction

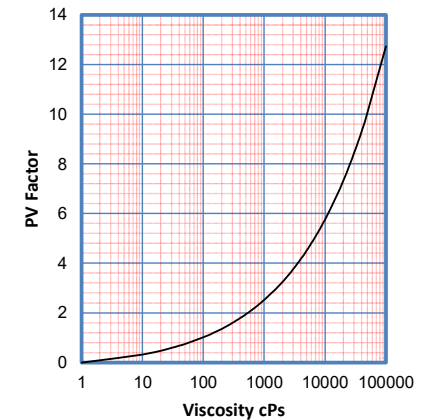


Port Diameter	947	474	316	237	189	157	135	118	104	93
2.00 Inch	100	200	300	400	500	600	700	800	900	1000
	Max Viscosity (cPs) x 100 @ 0 pressure									

DuraCirc 42 Hi-Life


WITH NON GALLING 302°F CPP ROTORS AND MECHANICAL SEAL

TYPICAL PERFORMANCE CURVE


Flow at 1cPs

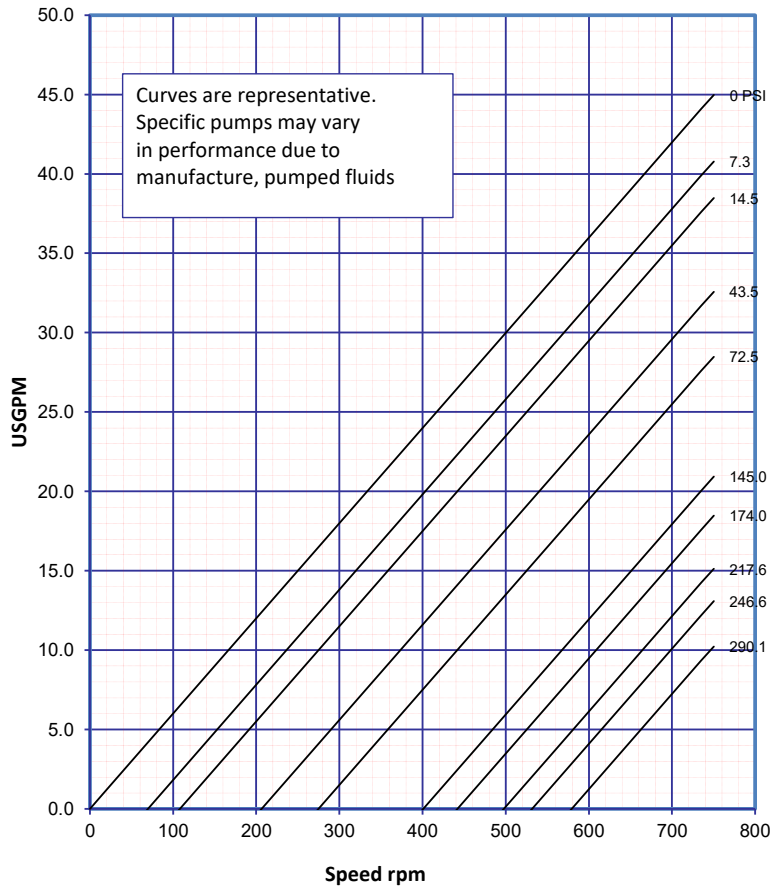


Power at 1 cPs

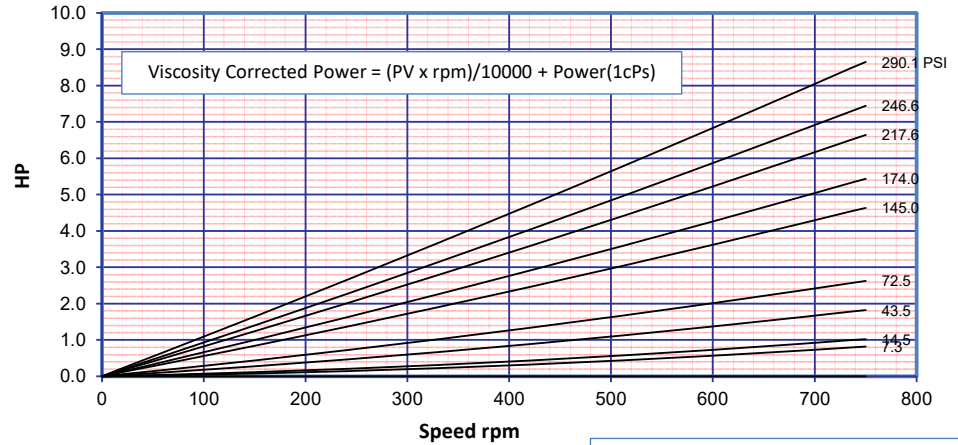

Flow - Viscosity Correction

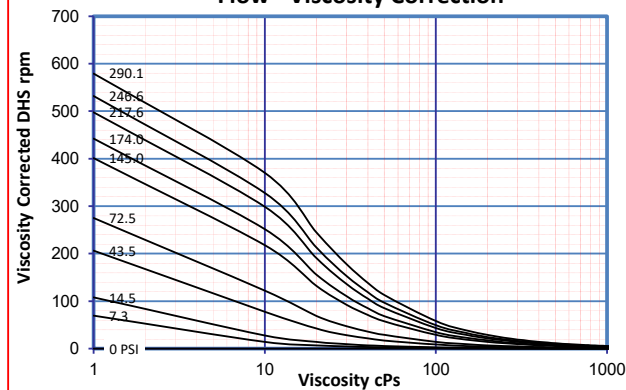

Power Viscosity Correction

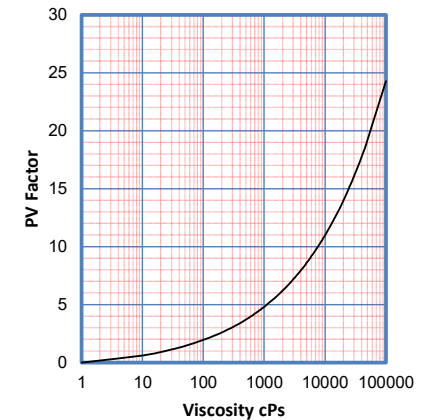


Port Diameter	134	67	45	33	26	21	18	16
1.50 Inch	100	200	300	400	500	600	700	800
	Max Viscosity (cPs) x 100 @ 0 pressure							

DuraCirc 43 Hi-Life


WITH NON GALLING 302°F CPP ROTORS AND MECHANICAL SEAL

TYPICAL PERFORMANCE CURVE


Flow at 1cPs

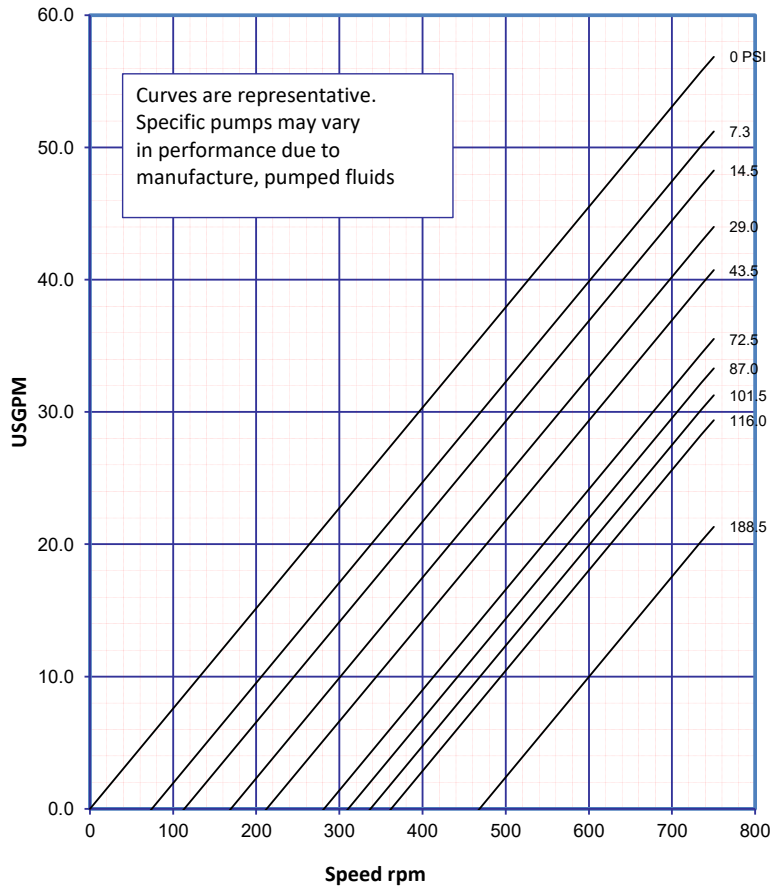


Power at 1 cPs

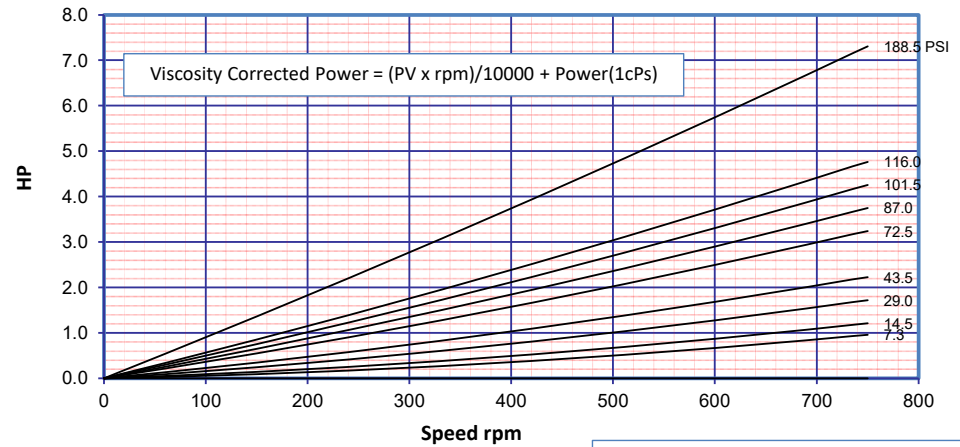

Flow - Viscosity Correction

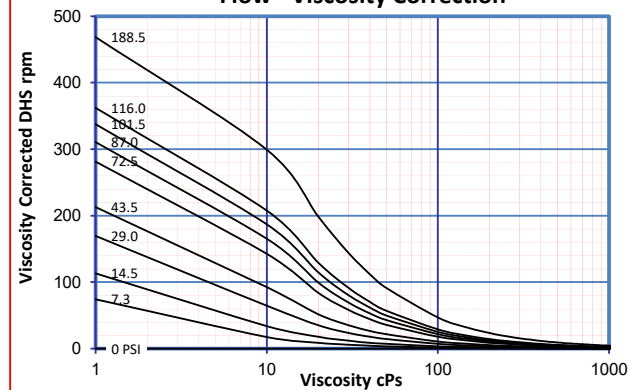

Power Viscosity Correction

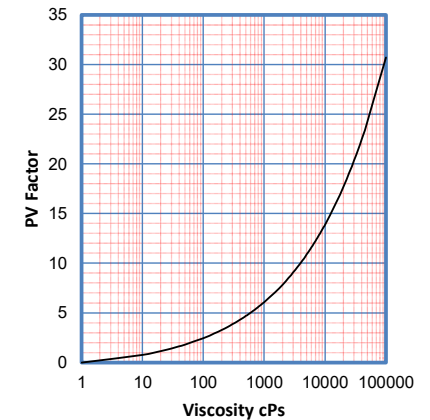


Port Diameter	368	184	122	91	73	60	51	44
2.00 Inch	100	200	300	400	500	600	700	800
Inch								
	Max Viscosity (cPs) x 100 @ 0 pressure							

DuraCirc 52 Hi-Life


WITH NON GALLING 302°F CPP ROTORS AND MECHANICAL SEAL

TYPICAL PERFORMANCE CURVE


Flow at 1cPs

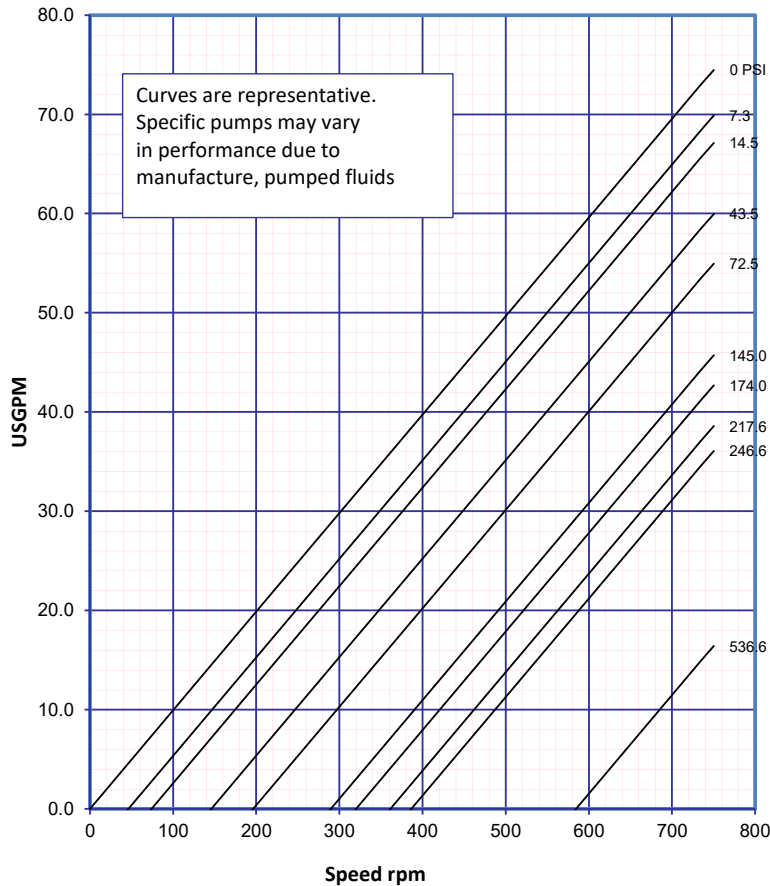


Power at 1 cPs

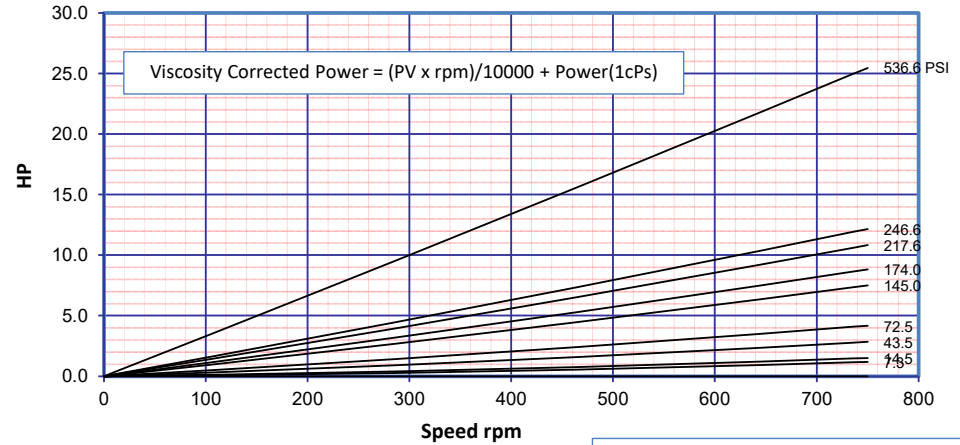

Flow - Viscosity Correction

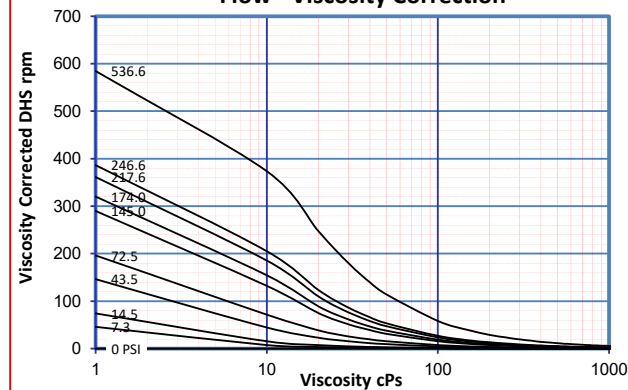

Power Viscosity Correction

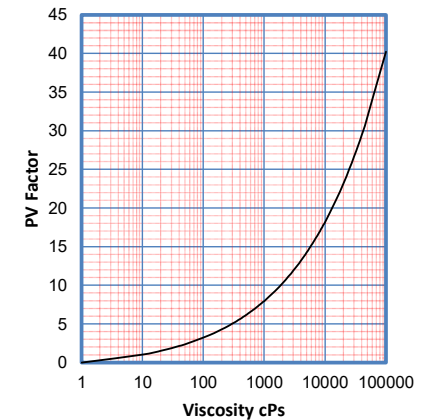


Port Diameter	252	126	84	62	49	41	34	29
2.00 Inch	100	200	300	400	500	600	700	800
Inch								
	Max Viscosity (cPs) x 100 @ 0 pressure							

DuraCirc 53 Hi-Life


WITH NON GALLING 302°F CPP ROTORS AND MECHANICAL SEAL

TYPICAL PERFORMANCE CURVE


Flow at 1cPs

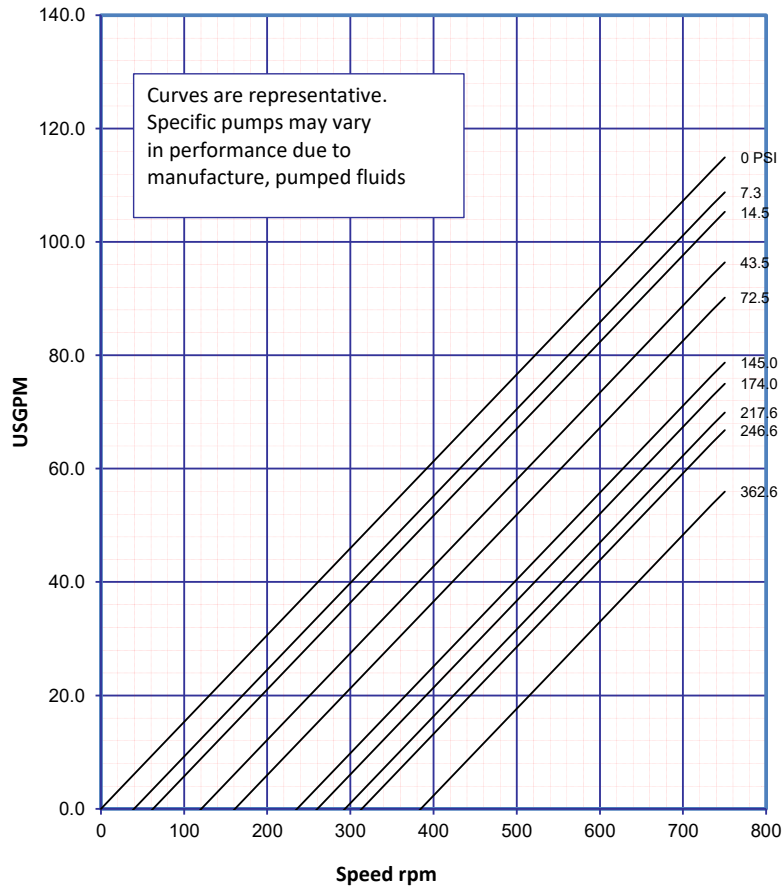


Power at 1 cPs

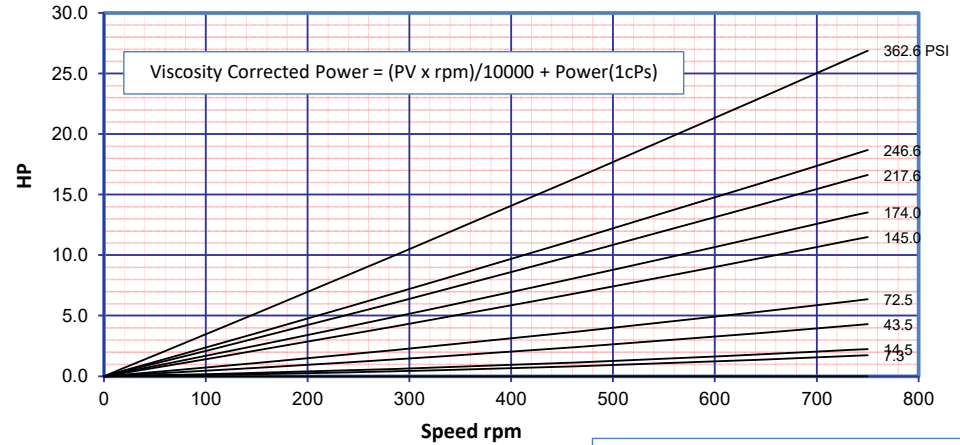

Flow - Viscosity Correction

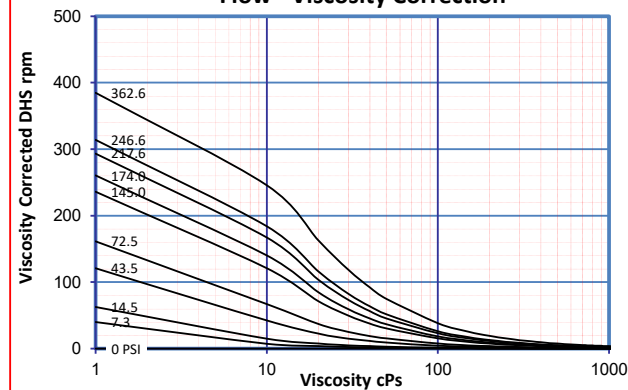

Power Viscosity Correction

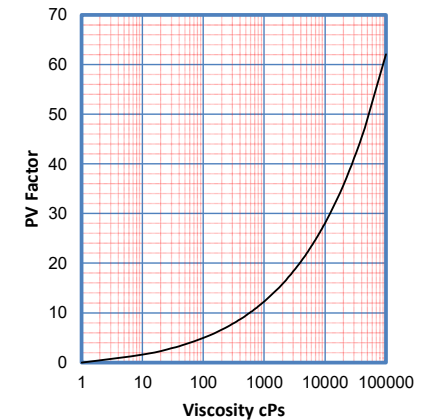


Port Diameter	421	211	140	104	82	68	57	49
2.50 Inch	100	200	300	400	500	600	700	800
	Max Viscosity (cPs) x 100 @ 0 pressure							

DuraCirc 54 Hi-Life


WITH NON GALLING 302°F CPP ROTORS AND MECHANICAL SEAL

TYPICAL PERFORMANCE CURVE


Flow at 1cPs

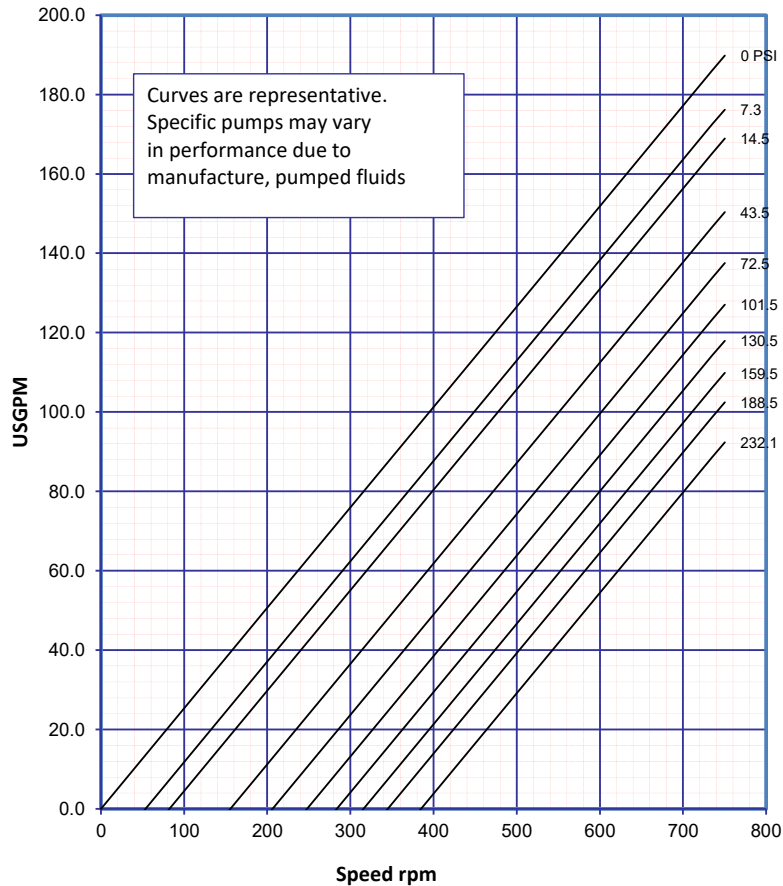


Power at 1 cPs

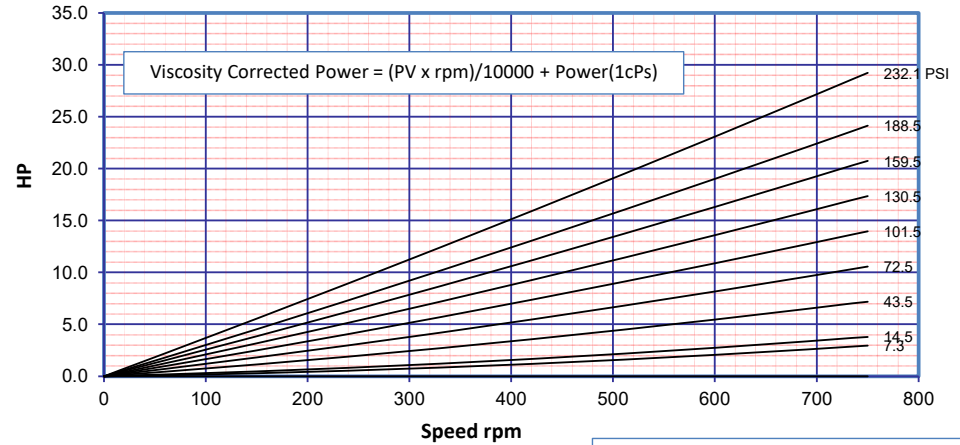

Flow - Viscosity Correction

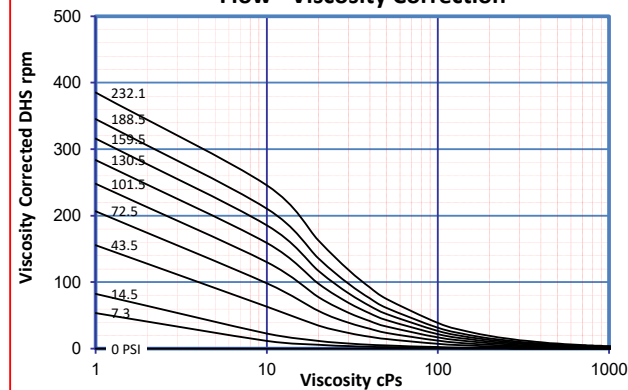

Power Viscosity Correction

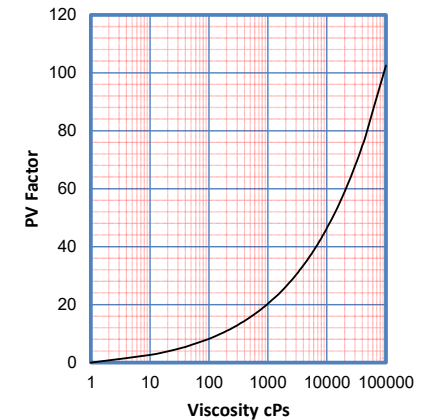


Port Diameter	495	247	163	121	96	79	66	57
3.00 Inch	100	200	300	400	500	600	700	800
	Max Viscosity (cPs) x 100 @ 0 pressure							

DuraCirc 62 Hi-Life


WITH NON GALLING 302°F CPP ROTORS AND MECHANICAL SEAL

TYPICAL PERFORMANCE CURVE


Flow at 1cPs

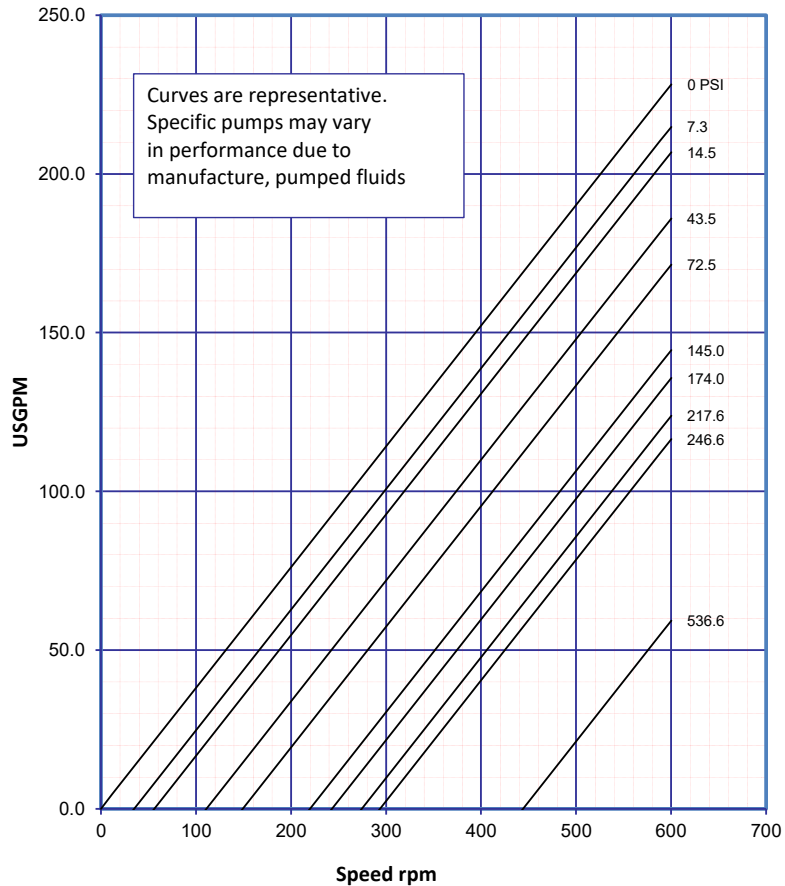


Power at 1 cPs

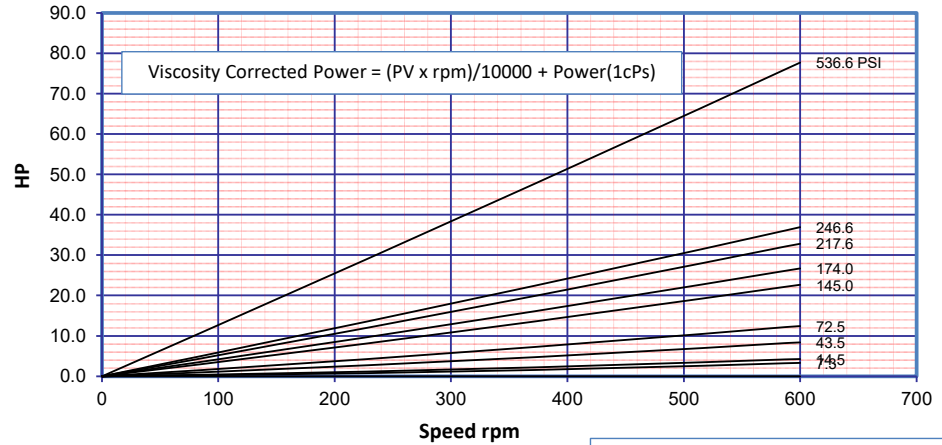

Flow - Viscosity Correction

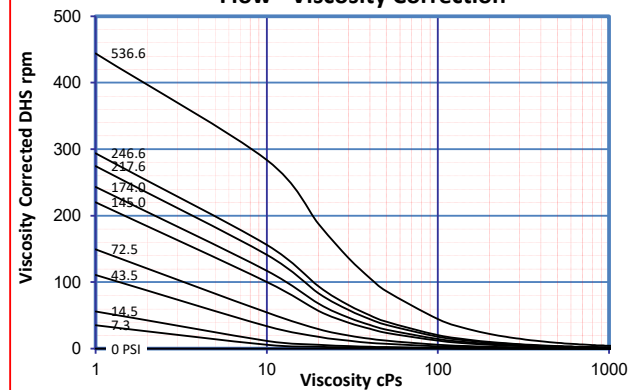

Power Viscosity Correction

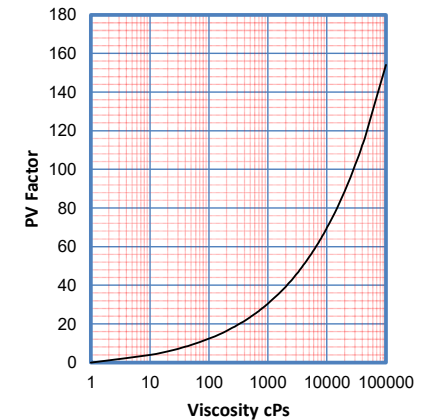

Port Diameter	329	164	108	80	62	50	42
3.00 Inch	100	200	300	400	500	600	700
	Max Viscosity (cPs) x 100 @ 0 pressure						

Issued By: Philip Stokes


Reference: DuraCirc 62 Hi-Life-37-150-Rev 2- 06/08/2021

DuraCirc 63 Hi-Life


WITH NON GALLING 302°F CPP ROTORS AND MECHANICAL SEAL

TYPICAL PERFORMANCE CURVE


Flow at 1cPs

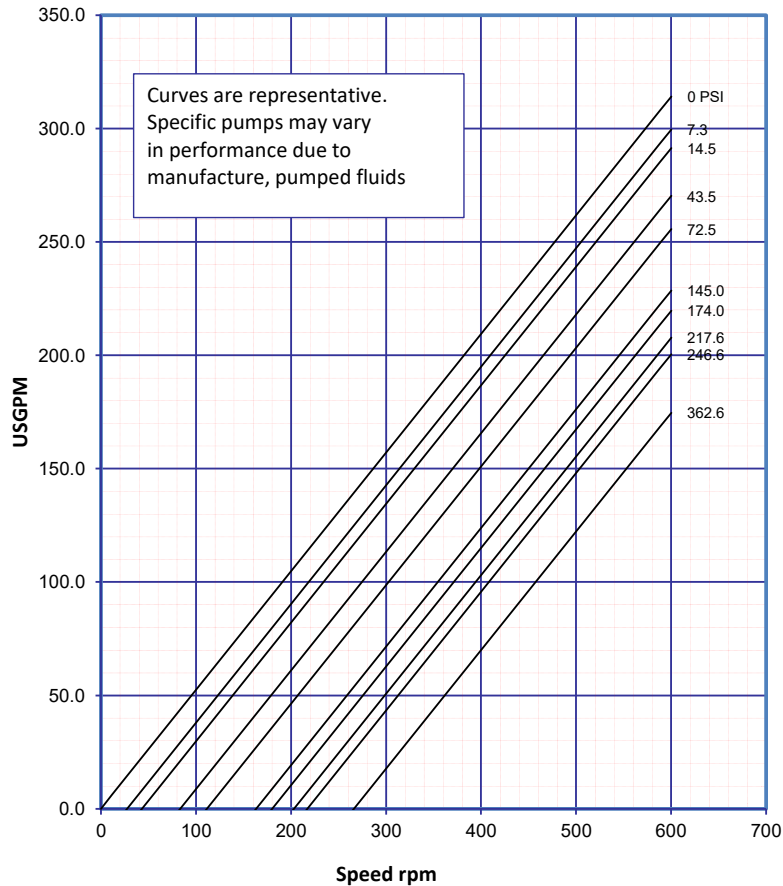


Power at 1 cPs

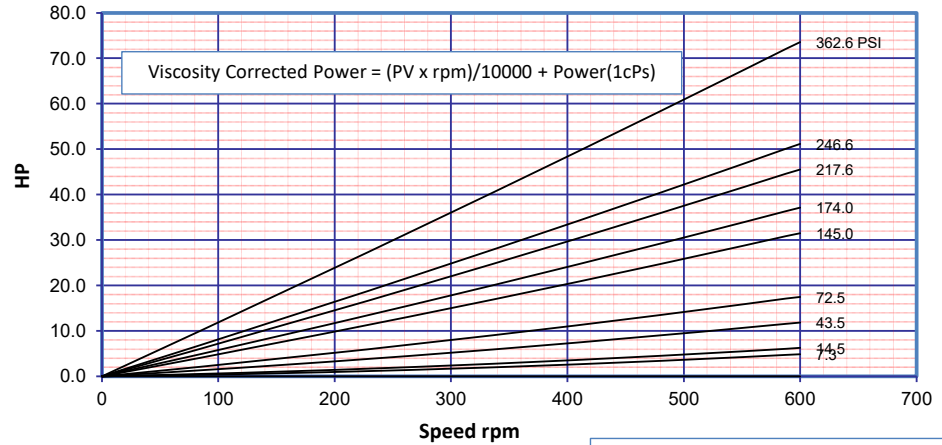

Flow - Viscosity Correction

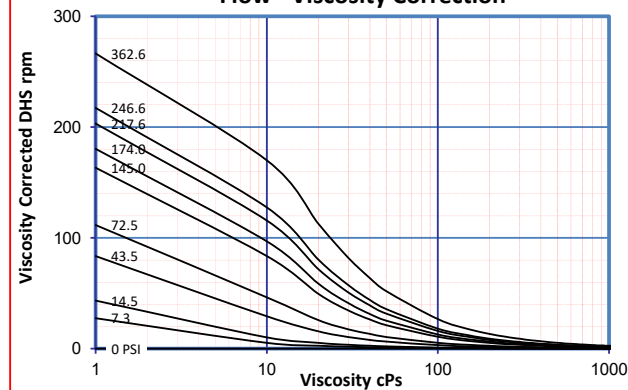

Power Viscosity Correction

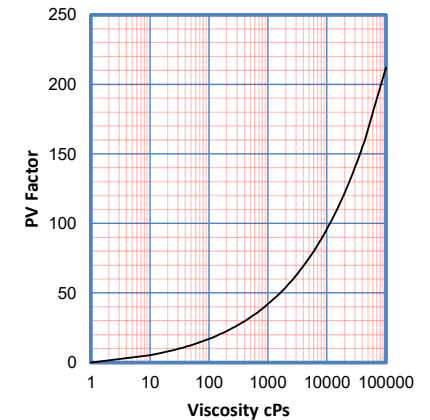


Port Diameter	764	381	253	187	148	121	101
4.00 Inch	100	200	300	400	500	600	700
	Max Viscosity (cPs) x 100 @ 0 pressure						

DuraCirc 72 Hi-Life


WITH NON GALLING 302°F CPP ROTORS AND MECHANICAL SEAL

TYPICAL PERFORMANCE CURVE


Flow at 1cPs

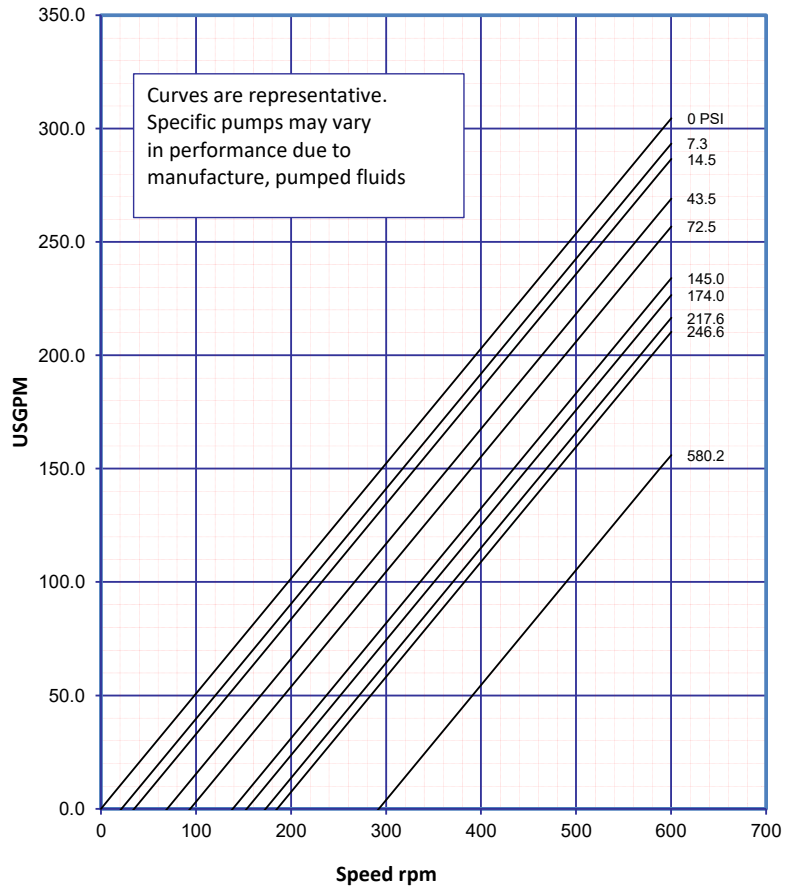


Power at 1 cPs

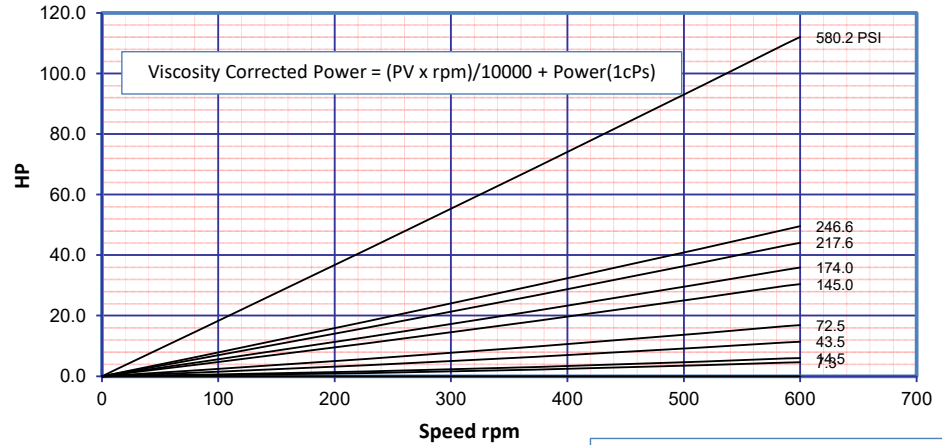

Flow - Viscosity Correction

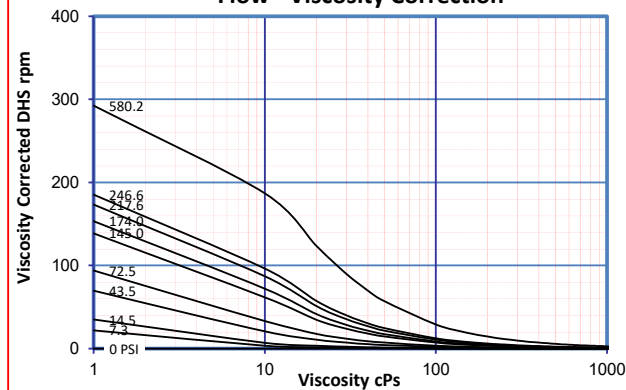

Power Viscosity Correction

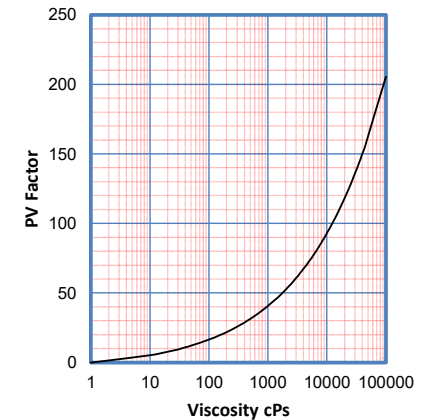


Port Diameter	807	404	268	199	156	128	107
4.00 Inch	100	200	300	400	500	600	700
	Max Viscosity (cPs) x 100 @ 0 pressure						

DuraCirc 73 Hi-Life


WITH NON GALLING 302°F CPP ROTORS AND MECHANICAL SEAL

TYPICAL PERFORMANCE CURVE


Flow at 1cPs

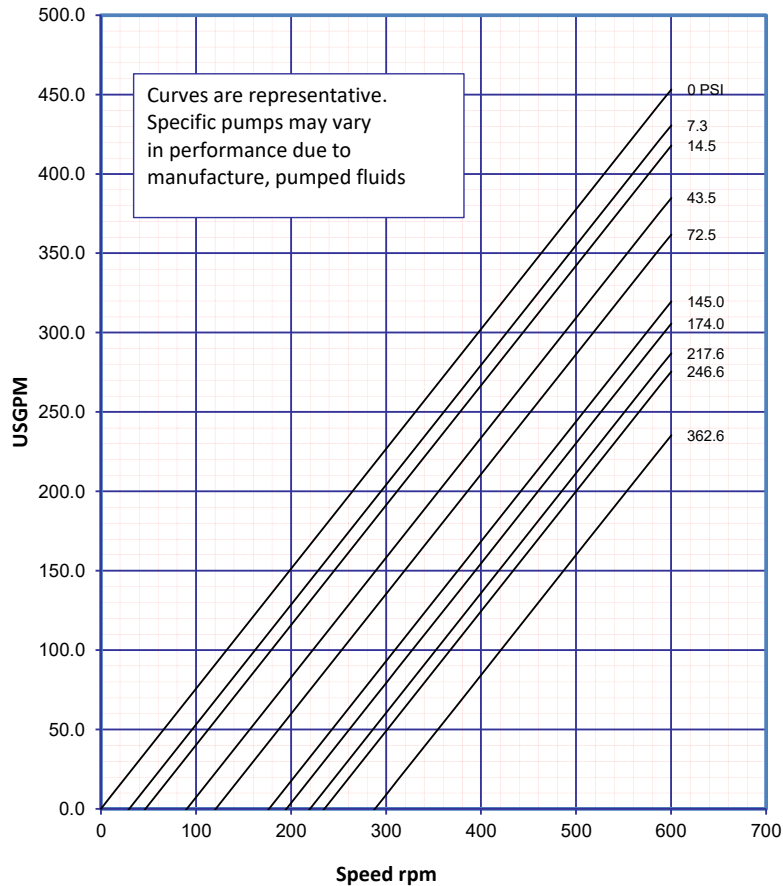


Power at 1 cPs

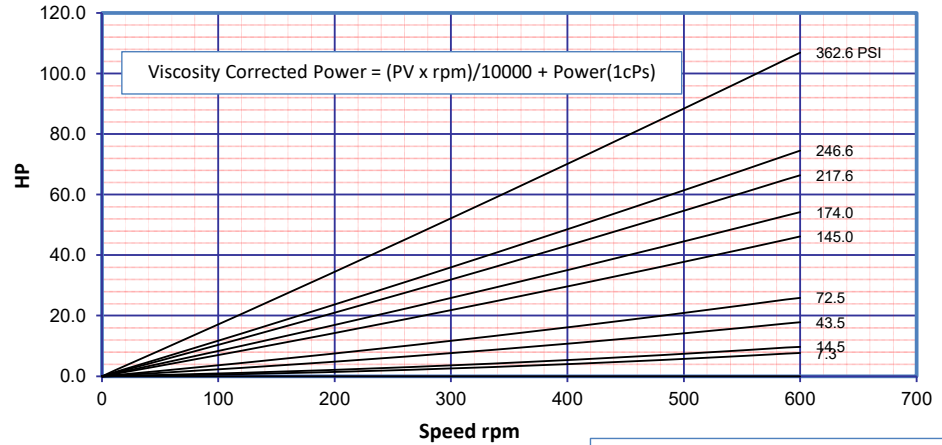

Flow - Viscosity Correction

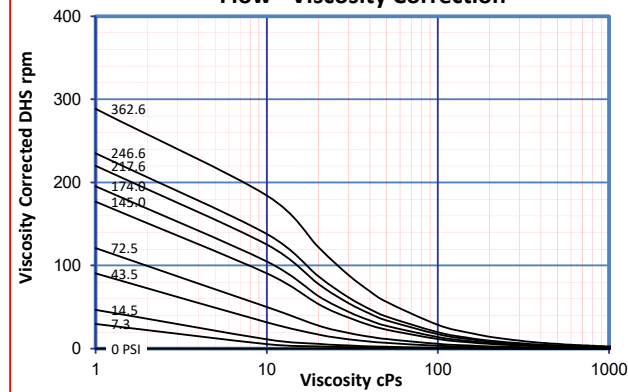

Power Viscosity Correction

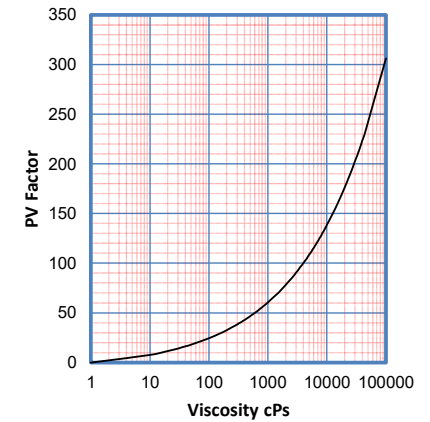

Port Diameter	1243	620	411	305	241	197	165
6.00 Inch	100	200	300	400	500	600	700
Inch							
	Max Viscosity (cPs) x 100 @ 0 pressure						

Issued By: Philip Stokes


Reference: DuraCirc 73 Hi-Life-25-150-Rev 1- 21/05/2021

DuraCirc 74 Hi-Life


WITH NON GALLING 302°F CPP ROTORS AND MECHANICAL SEAL

TYPICAL PERFORMANCE CURVE


Flow at 1cPs

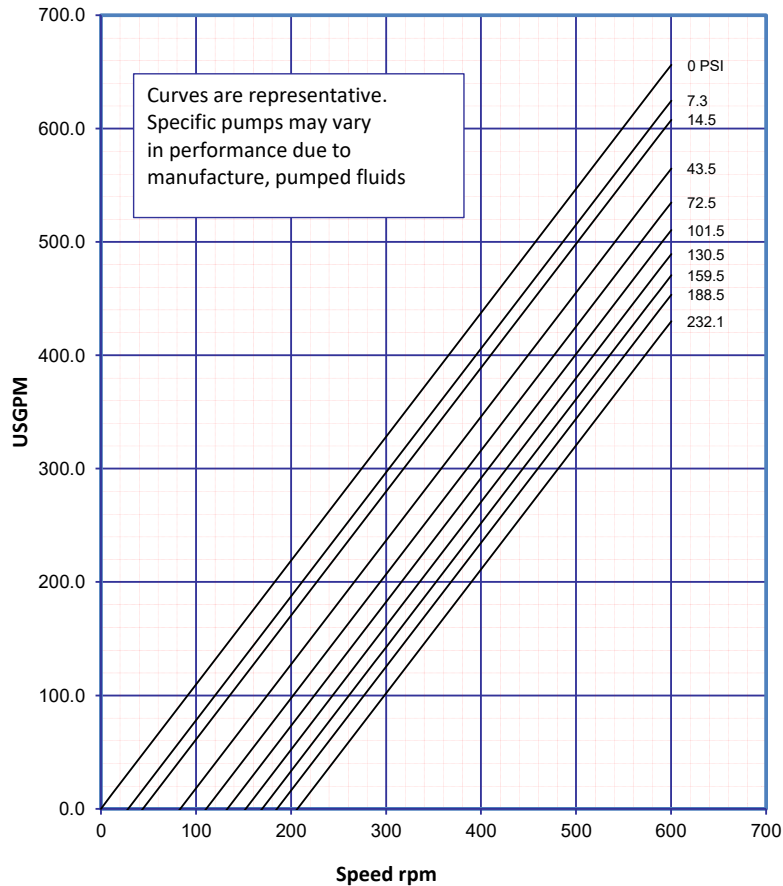


Power at 1 cPs

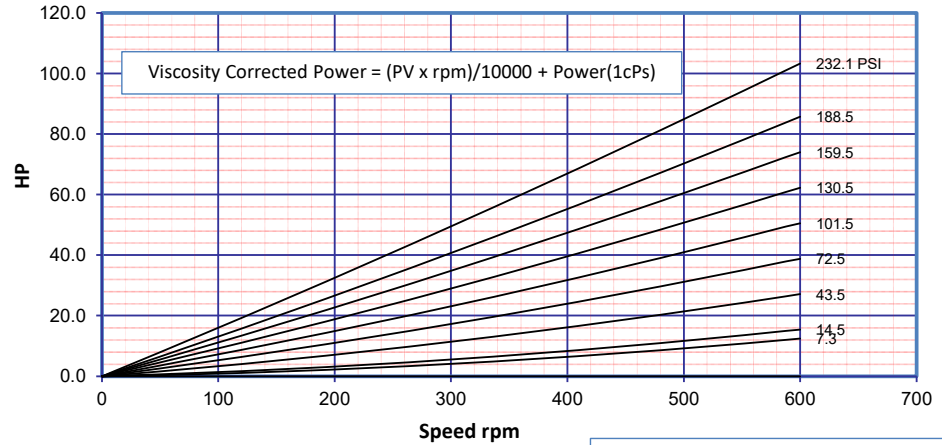

Flow - Viscosity Correction

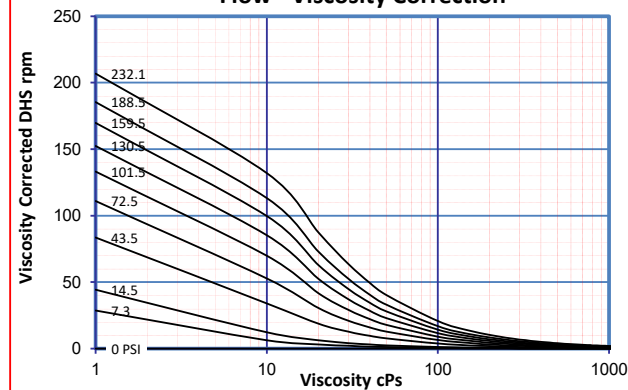

Power Viscosity Correction

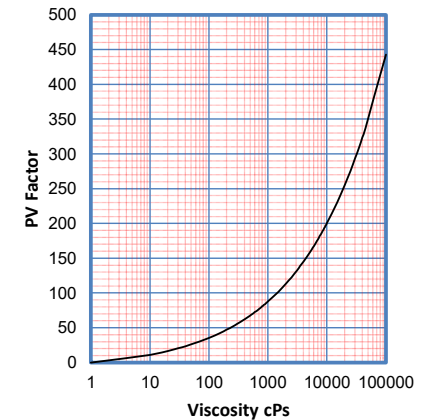

Port Diameter	1924	962	637	472	373	305	257
6.00 Inch	100	200	300	400	500	600	700
	Max Viscosity (cPs) x 100 @ 0 pressure						