




S050 METAL PTFE

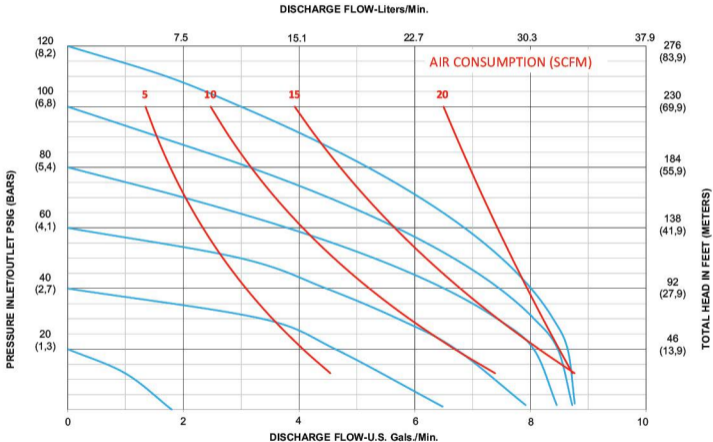


S050 METAL RUBBER

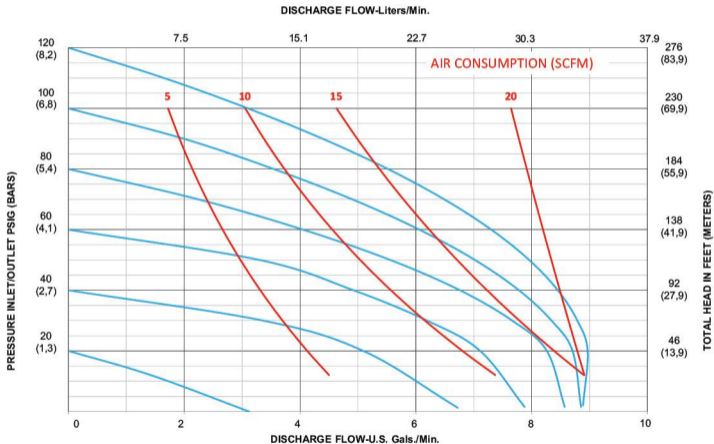


S050 METAL TPE

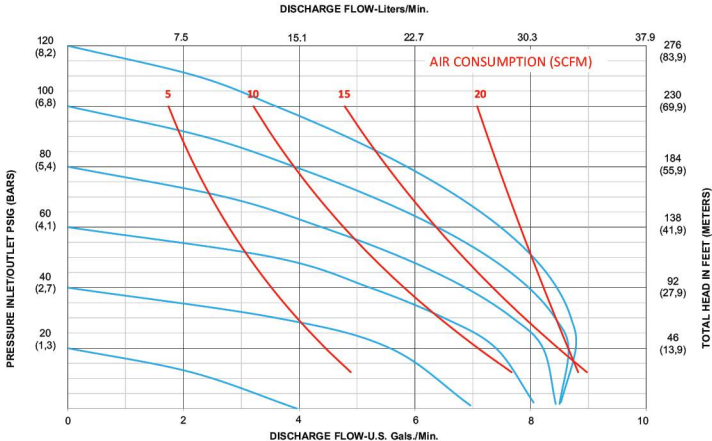

S100 METAL PTFE

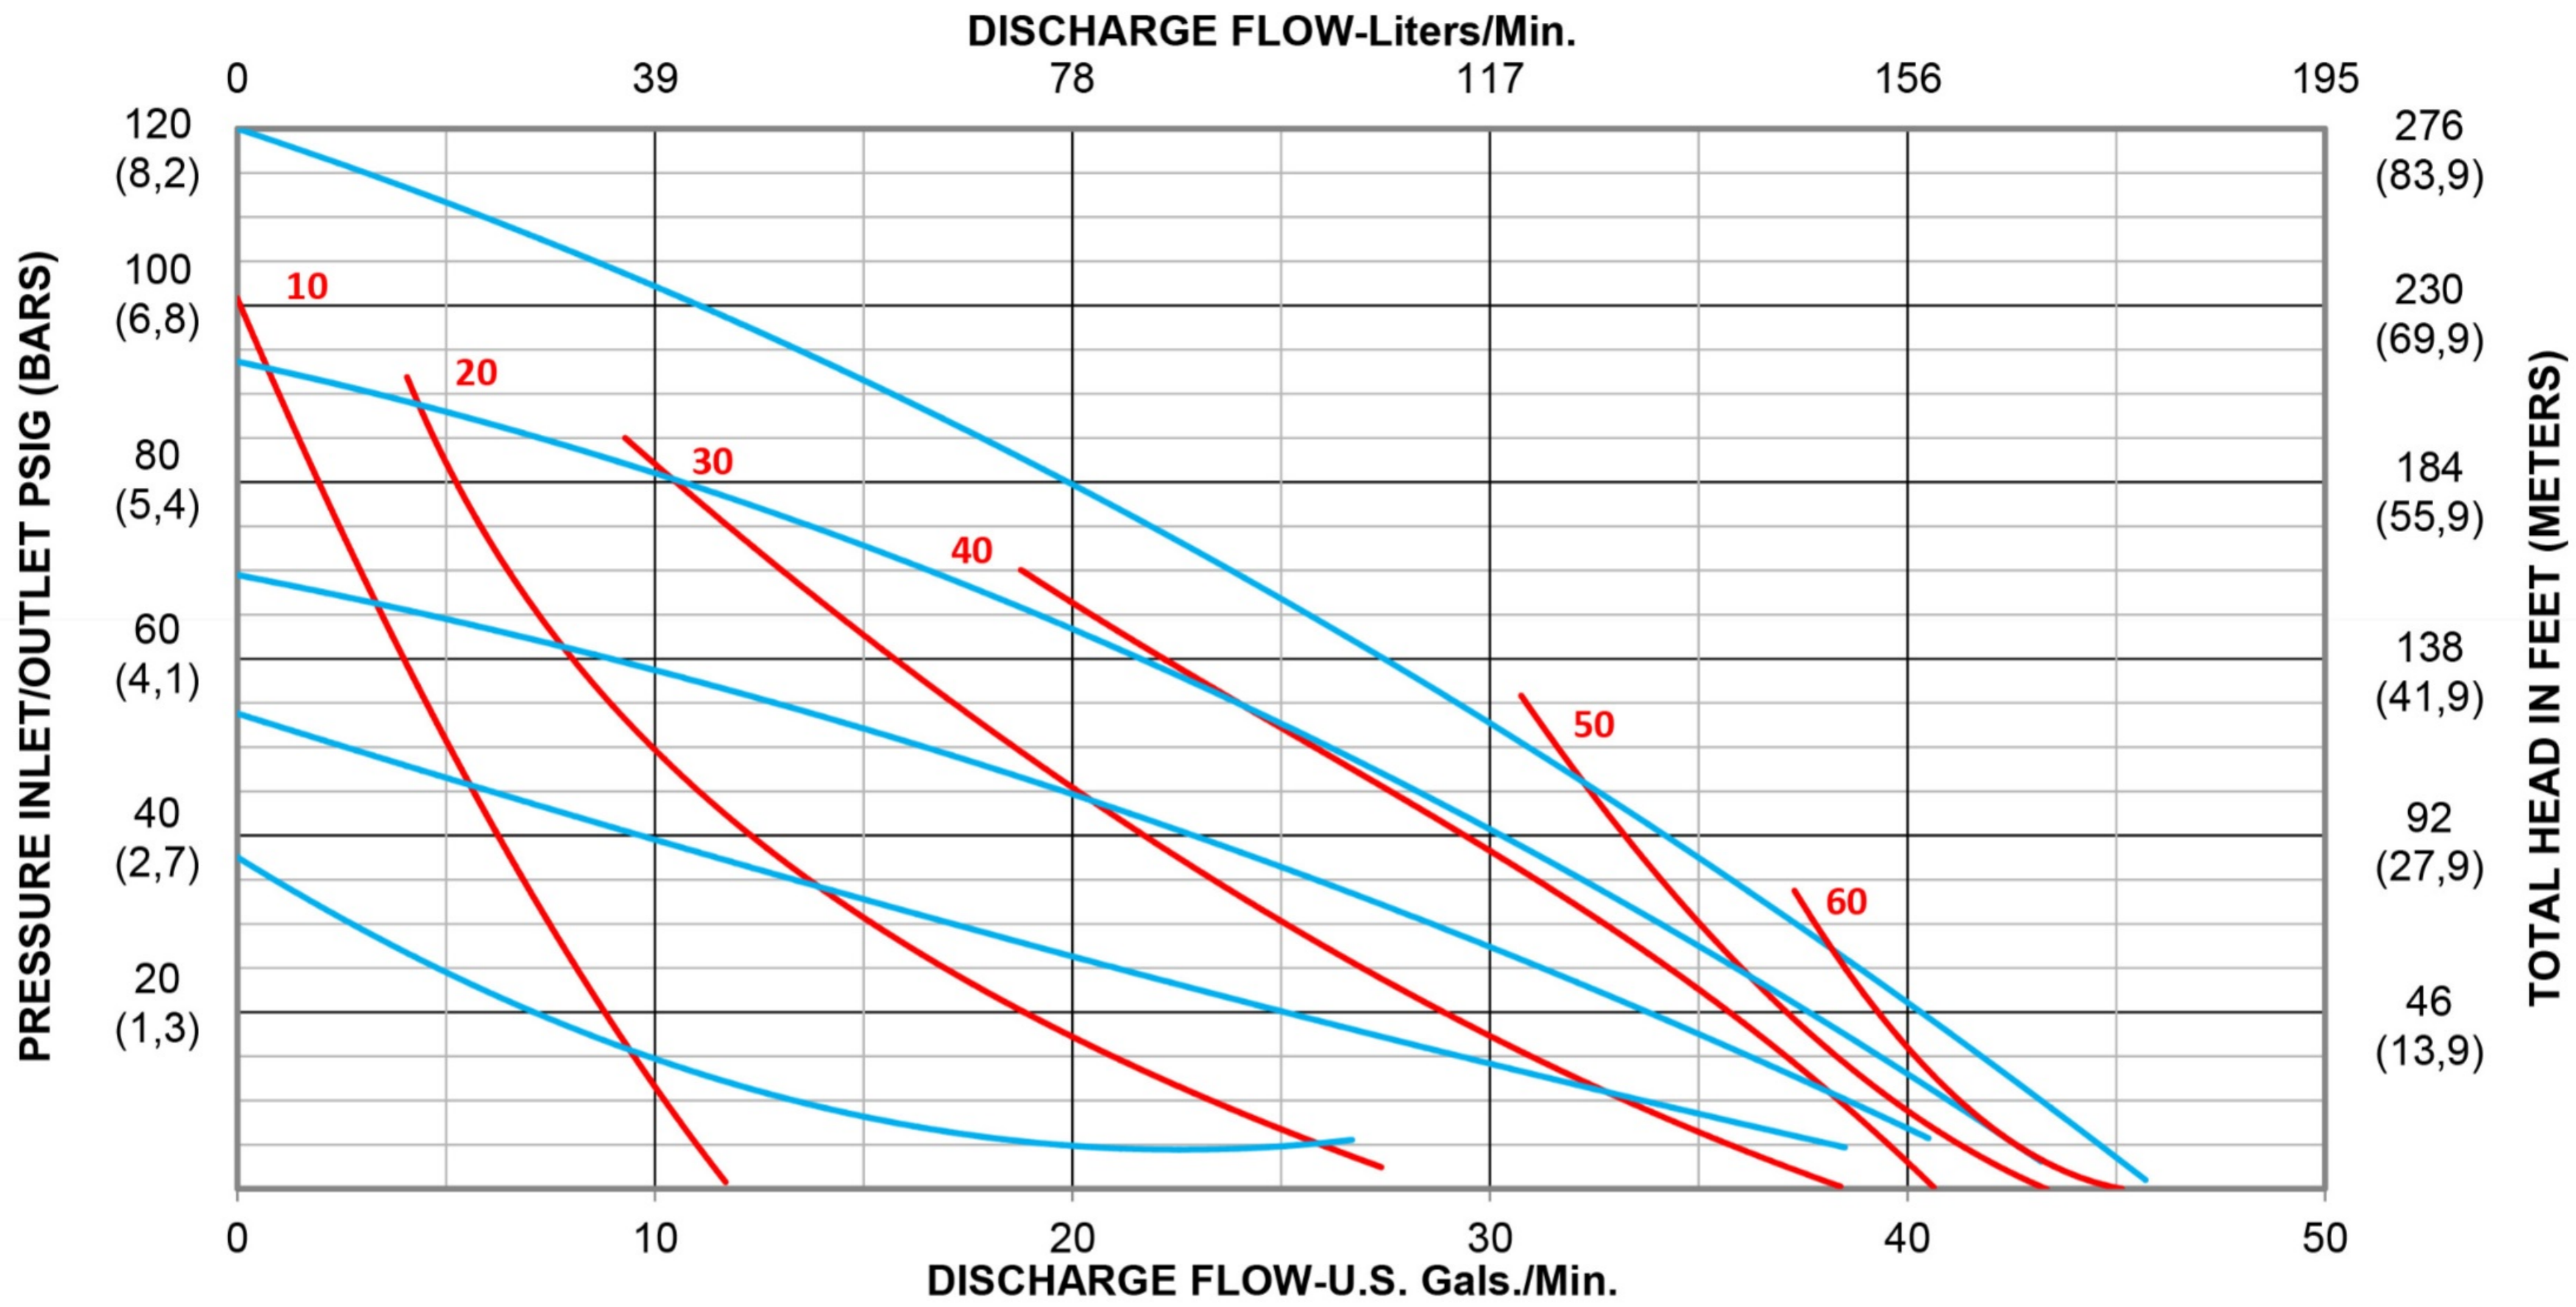



S100 METAL RUBBER

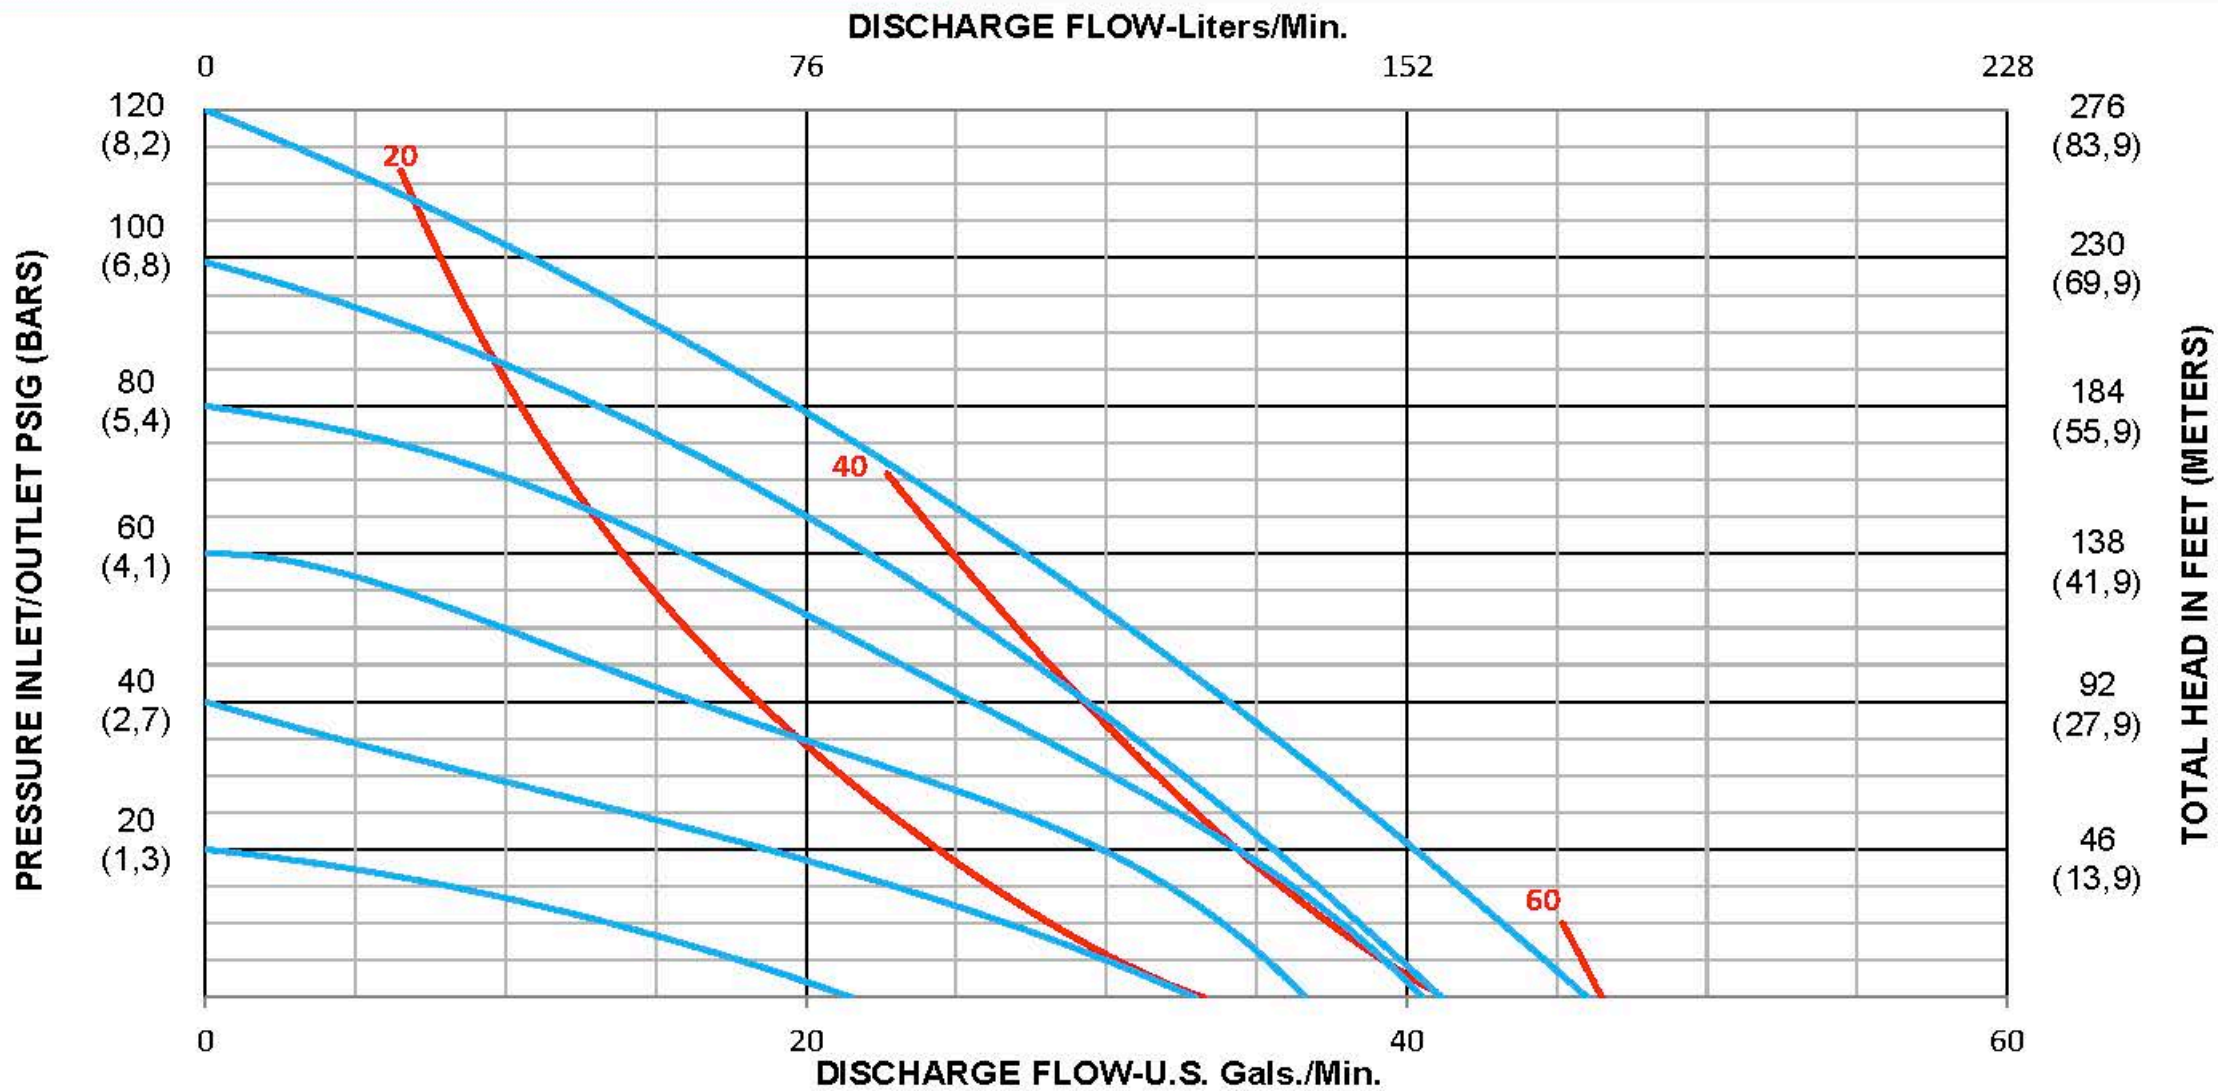

S100 METAL TPE

DISCHARGE FLOW-Liters/Min.

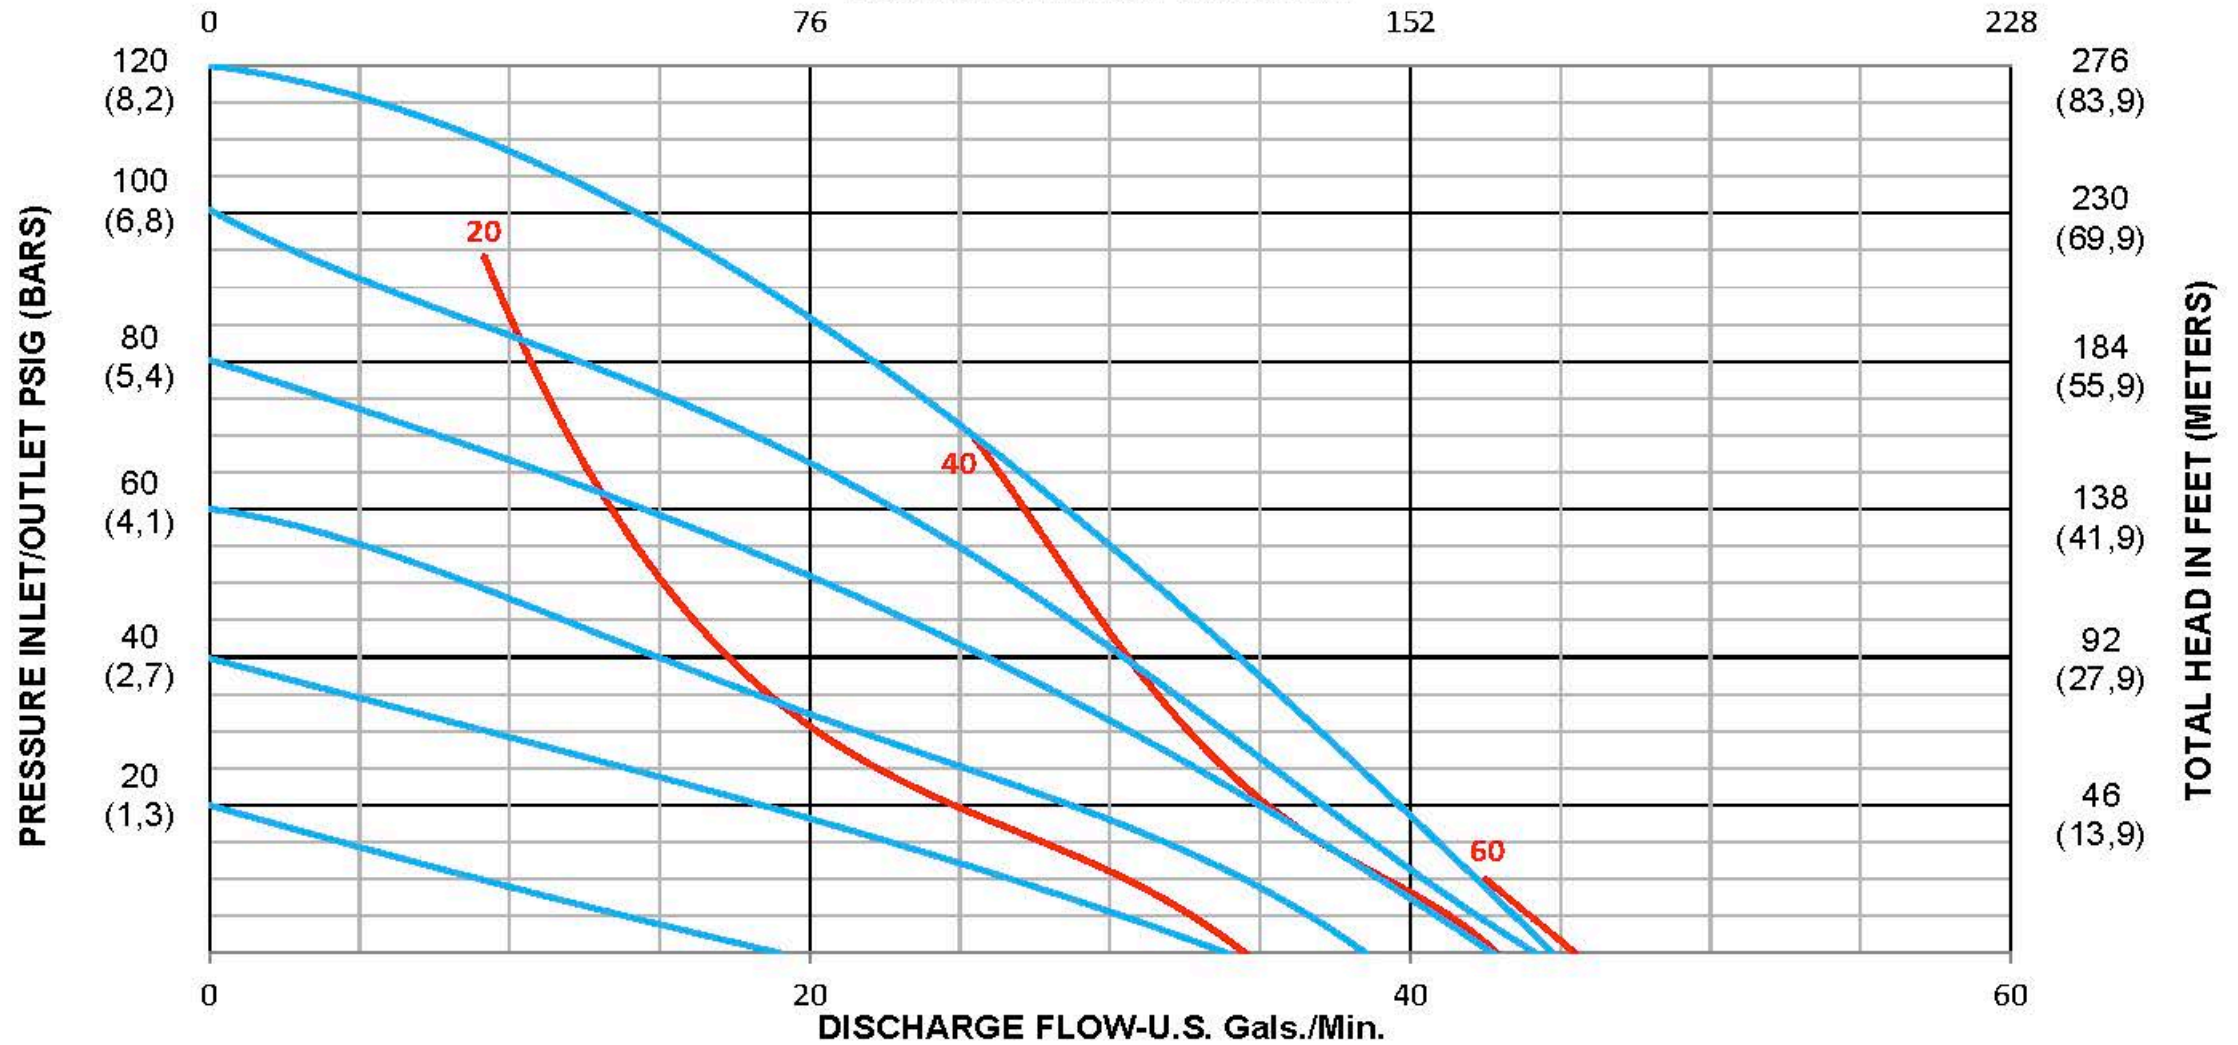

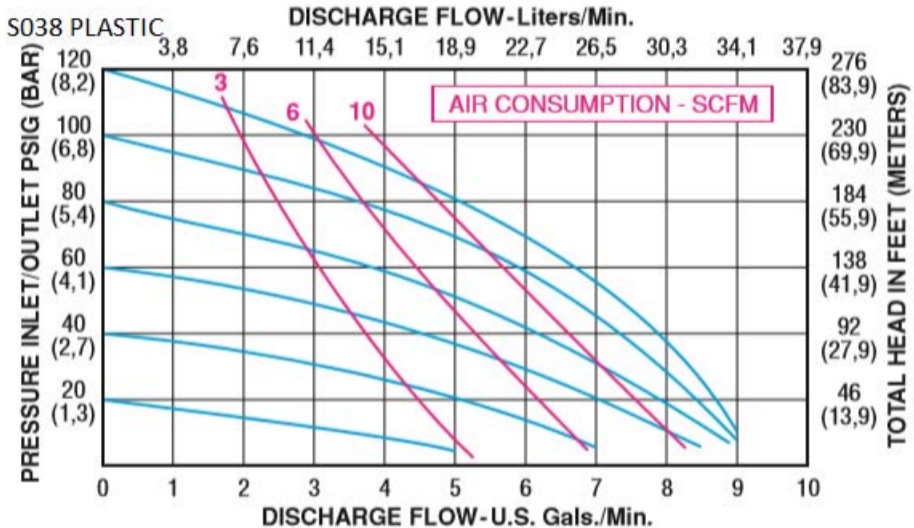

S050 PLASTIC

DISCHARGE FLOW-Liters/Min.

PRESSURE INLET/OUTLET PSIG (BARS)

120 (8,2)
100 (6,8)
80 (5,4)
60 (4,1)
40 (2,7)
20 (1,3)

7,6

15,1

22,7

30,3


37,9

45,4

53,0

60,6

68,1

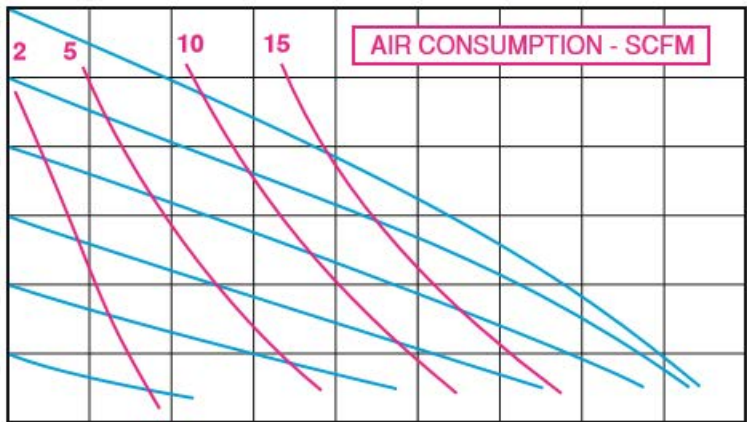

AIR CONSUMPTION - SCFM

DISCHARGE FLOW-U.S. Gals./Min.

TOTAL HEAD IN FEET (METERS)

276 (83,9)
230 (69,9)
184 (55,9)
138 (41,9)
92 (27,9)
46 (13,9)

S100 PLASTIC

